

**P8**  
**URBAN CATCHMENT MODEL**  
**Program Documentation**  
**Version 1.1**

**prepared for**

**IEP, Inc.**  
**6 Maple Street**  
**Northborough, Massachusetts 01532**

**and**

**Narragansett Bay Project**  
**291 Promenade Street**  
**Providence, Rhode Island 02908**

**by**

**William W. Walker, Jr., Ph.D.**  
**Environmental Engineer**  
**1127 Lowell Road**  
**Concord, Massachusetts 01742**

**October 1990**

## **P8**

### **URBAN CATCHMENT MODEL**

#### **Program for Predicting Polluting Particle Passage Thru Pits, Puddles, & Ponds**

#### **A B S T R A C T**

P8 is a model for predicting the generation and transport of stormwater runoff pollutants in urban watersheds. Continuous water-balance and mass-balance calculations are performed on a user-defined system consisting of the following elements:

- WATERSHEDS (nonpoint source areas)
- DEVICES (runoff storage/treatment areas, BMP's)
- PARTICLE CLASSES
- WATER QUALITY COMPONENTS

Simulations are driven by continuous hourly rainfall and daily air temperature time series. The model has been developed for use by engineers and planners in designing and evaluating runoff treatment schemes for existing or proposed urban developments. The model is initially calibrated to predict runoff quality typical of that measured under the EPA's Nationwide Urban Runoff Program (Athayede et al., 1983) for Rhode Island rainfall patterns. Predicted water quality components include suspended solids (five size fractions), total phosphorus, total Kjeldahl nitrogen, copper, lead, zinc, and total hydrocarbons.

Primary applications include site BMP design to achieve total suspended solids removal efficiencies (70% or 85%) recommended by the Rhode Island Department of Environmental Management (1988). Simulated BMP types include detention ponds (wet, dry, extended), infiltration basins, swales, and buffer strips. Hydrologic components of the program are calibrated and tested against six years of daily streamflow data from the 15,000-acre Hunt-Potowomut watershed, Rhode Island. The model is used to examine the water quality implications of alternative treatment objectives.

Inputs are structured in terms which should be familiar to planners and engineers involved in hydrologic evaluation. Several tabular and graphic output formats are provided. The computer program runs on IBM-PC compatible microcomputers. This report documents the structure, calibration, testing, potential uses, and limitations of the program. A companion report (P8 Urban Catchment Model - User's Manual, IEP Inc., 1990) provides an overview and several example applications.

## TABLE OF CONTENTS

<b>LIST OF FIGURES</b> .....	<b>i</b>
<b>LIST OF TABLES</b> .....	<b>iii</b>
<b>1.0 INTRODUCTION</b> .....	<b>1</b>
1.1 Overview.....	1
1.2 Limitations of P8 and Other Urban Runoff Models.....	2
1.3 Intended Uses.....	3
<b>2.0 PROGRAM MECHANICS</b> .....	<b>4</b>
<b>3.0 MODEL INPUTS</b> .....	<b>6</b>
3.1 Watershed and Device Characteristics.....	6
3.2 Particle and Water Quality Component Characteristics.....	7
3.3 Precipitation and Air Temperature.....	10
3.4 Sample Case Files.....	12
3.5 Entering New Cases.....	12
<b>4.0 MODEL OUTPUTS</b> .....	<b>15</b>
4.1 Simulation Results.....	15
4.2 Design Functions.....	16
4.3 Sensitivity Analysis.....	17
4.4 Flow Calibration.....	17
<b>5.0 SIMULATION METHODS</b> .....	<b>18</b>
5.1 Watershed Runoff Volumes.....	18
5.2 Watershed Loads.....	20
5.3 Device Flows.....	21
5.4 Device Outlet Capacities.....	23
5.5 Device Concentrations.....	24
5.6 Particle Removal Scale Factors.....	26
<b>6.0 MODEL CALIBRATION</b> .....	<b>29</b>
6.1 Particle Classes.....	29
6.2 Particle Composition.....	31
6.3 Filtration Efficiency.....	33
6.4 Water Quality Criteria.....	33
<b>7.0 MODEL TESTING</b> .....	<b>34</b>
7.1 Device Performance.....	34
7.2 Sensitivity Analysis.....	39
7.3 Watershed Scale Application.....	45
7.4 Effects of Precipitation Variations.....	54
<b>8.0 TREATMENT CRITERIA</b> .....	<b>57</b>
<b>9.0 MODEL LIMITATIONS</b> .....	<b>68</b>
<b>REFERENCES</b> .....	<b>72</b>
<b>APPENDIX A - Menu Structure</b>	
<b>APPENDIX B - Data Entry Screens</b>	
<b>APPENDIX C - Output Screens</b>	
<b>APPENDIX D - Help Screen Index</b>	
<b>APPENDIX E - Installation &amp; Application Procedures</b>	

## LIST OF FIGURES

1	P8 Main Menu Screen.....	5
2	P8 Device Types.....	8
3	P8 Mass-Balance Schematic.....	9
4	Schematic Diagrams - P8 Test Cases.....	13
5	Effect of Time of Concentration on Watershed Response.....	19
6	Effects of Macrophytes on Wet Pond Removal Efficiencies.....	28
7	Comparison of Predicted Volume Capture Efficiencies.....	35
8	Comparison of Predicted Volume Capture Efficiencies - Great Lakes Precipitation Sequence.....	36
9	Comparison of Predicted Suspended Solids Removal Efficiencies for Wet Detention Ponds.....	37
10	Predicted Suspended Solids Removal Efficiencies vs. Particle Class.....	38
11	Comparison of Predicted Phosphorus Removal Efficiencies.....	40
12	P8 Application to Hunt-Potowomut Watershed.....	47
13	Predicted and Observed Flows - Hunt-Potowomut River - Calibration Period.....	48
14	Predicted Instantaneous Peak Flow - Hunt-Potowomut River.....	49
15	Predicted and Observed Flows - Hunt-Potowomut River - Verification Period.....	50
16	Observed and Predicted Mean Daily Flows.....	51
17	Observed and Predicted Monthly Total Streamflow.....	52
18	Observed and Predicted 12-Month Moving-Average Streamflow.....	53
19	Yearly Precipitation and Runoff TSS Concentration.....	55
20	Longterm Average Removal Efficiencies for Dissolved Species, Fine Particles, and Total Suspended Solids.....	56
21	Yearly Variations in TSS and Fine Particle Removal Efficiency..	58
22	Yearly Deviations from Longterm Average TSS Removal.....	59

LIST OF FIGURES (ct.)

23	Yearly Deviations from Longterm Average TSS Outflow Concentration.....	60
24	Device Relative Areas Required to Achieve 70% and 85% TSS Removal.....	62
25	Relationship between Suspended Solids Removal and Violations in Copper Toxicity Criterion for Wet Ponds Treating Median NURP Sites.....	65
26	Particle Settling Velocity vs. Diameter and Density.....	67

## LIST OF TABLES

1	Mass Balance Terms.....	27
2	Calibration of Particle Parameters.....	30
3	Calibrated Runoff Concentrations.....	32
4	Water Quality Criteria.....	32
5	Input Values for Sensitivity Analysis.....	42
6	Sensitivity Analysis Results.....	43
7	Input Values for Hunt-Potowomut Watershed.....	46
8	Performance of Devices Designed for 70% TSS Removal.....	63
9	Performance of Devices Designed for 85% TSS Removal.....	64

## 1.0 INTRODUCTION

### 1.1 Overview

P8 is a model for predicting the generation and transport of stormwater runoff pollutants in urban catchments. Continuous water-balance and mass-balance calculations are performed on a user-defined system consisting of the following elements:

- **WATERSHEDS** (nonpoint source areas)
- **DEVICES** (runoff storage/treatment areas, BMP's)
- **PARTICLE CLASSES**
- **WATER QUALITY COMPONENTS**

Simulations are driven by continuous hourly rainfall and daily air temperature time series. The model has been developed for use by engineers and planners in designing and evaluating runoff treatment schemes for existing or proposed urban developments. This report documents the structure, calibration, testing, potential uses, and limitations of the program.

P8 is short for "Program for Predicting Polluting Particle Passage through Pits, Puddles & Ponds". It consists primarily of algorithms derived from other urban runoff models (e.g., SWMM, STORM, HSPF, D3RM, TR-20). Unique features include:

- (1) minimal requirements for site-specific input data, typically available from drainage plans, soil surveys, and other local sources;
- (2) expression of input data in terms which should be familiar to local engineers and planners who normally deal with hydrologic aspects of urban developments;
- (3) initial calibration of certain water-quality parameters (particle settling velocities, particle buildup/washoff parameters, particle contaminant contents) so that predicted runoff concentrations correspond to median (50th percentile) or extreme (90th percentile) values measured under the EPA's Nationwide Urban Runoff Program (NURP, Athayede et al., 1983); these parameters may be modified by the model users with alternative bases for calibration;
- (4) capability for simulating a variety of treatment devices, including swales, buffer strips, detention ponds (dry, wet, extended), flow splitters, infiltration basins (offline, online);
- (5) extensive user interface, including interactive operation, spreadsheet-like menus, help screens, and high-resolution color graphics.

The program runs on IBM-PC-compatible microcomputers. Computers equipped with 80286 processors (AT-class or higher) and numeric coprocessors are recommended.

## 1.2 Limitations of P8 and Other Urban Runoff Models

Results of the Nationwide Urban Runoff Program indicate that runoff quality is highly variable from site-to-site and from storm-to-storm at a given site (Athayede et al., 1983). The availability of calibration data limits the accuracy and use of urban runoff water quality models (Huber, 1986). Site-specific runoff quality data sufficient for model calibration purposes are generally not available to the engineer/planner, particularly when dealing with future developments. By relying upon generalized data sources for calibration of certain key parameters, this model does not "solve" data availability problems, but it does provide a reasonable starting point for calibration and a consistent frame of reference for evaluating proposed developments with respect to compliance with local treatment guidelines.

One important concept is that runoff model predictions are more accurate in a relative sense than in an absolute sense (Huber, 1986). For example, because it is independent of assumed runoff concentrations, prediction of suspended solids removal efficiency in a detention pond is likely to be more accurate than predictions of inflow or outflow concentrations of suspended solids or other water quality components. Removal efficiency depends upon the distribution of particle settling velocities (as estimated from NURP studies; Driscoll, 1983; USEPA, 1986) in relation to the hydraulic characteristics of the treatment device (area, depth, overflow rate, hydraulic residence time). These relationships are simulated by the physically-based model. Predicted removal efficiencies are independent of assumed inflow concentrations, which are highly variable from site-to-site.

Predictions of total suspended solids (TSS) removal efficiency are useful for evaluating the adequacy of urban runoff water quality controls proposed for a given development. For example, the Rhode Island Department of Environmental Management (1988) has proposed that BMP's in new urban developments be designed to provide average TSS removal efficiencies of 85% in "sensitive" areas (e.g., watersheds of water supply reservoirs, coastal ponds) and 70% in "non-sensitive" areas. P8 is designed for evaluating site compliance with these guidelines or others expressed in terms of a target removal efficiency for a specific particle class or water quality component.

Because of data limitations and site-to-site variations in the factors controlling runoff quality, absolute predictions generated by the model (inflow and outflow concentrations, loadings, violation frequencies) are more likely to deviate from actual conditions at a given site than are relative predictions of removal efficiency. Conservative input values (e.g., NURP 90th percentile concentrations) can be used to generate worst-case projections of contaminant concentrations and loadings, but these values should be interpreted cautiously because they may considerably over-estimate contaminant levels at specific sites.

The difficulties and potential errors associated with predicting absolute values at a given site may not be large a problem in a planning context, because it is generally impossible to evaluate the downstream water quality implications of over-predicting or under-predicting



contaminant loadings from a specific development. Over a large number of sites, absolute predictions based upon the NURP 50th percentiles are expected to provide more accurate assessments, although significant regional biases in absolute predictions may still exist. Calibration of model parameters to regional runoff monitoring data should help to reduce local biases.

Another limitation of this and other urban runoff models is that water quality predictions are developed by assigning contaminant contents (mg/kg) to particle fractions. The only removal mechanisms directly simulated by the model are sedimentation and filtration. Filtration occurs when water infiltrates into the soil. Biological and/or chemical mechanisms for contaminant removal in treatment devices are not directly considered. Given adequate data, however, such mechanisms could be considered to the extent that they can be represented by the kinetics formulations included in the model (filtration, first-order settling, first-order decay, second-order decay).

### 1.3 Intended Uses

Based upon the above considerations, the model is intended primarily for making "relative" predictions:

- (1) Evaluating site plans for compliance with treatment objective, expressed in terms of removal efficiency for total suspended solids or a single particle class. (e.g., 70%, 85% TSS removal, RIDEM, 1988);
- (2) In a design mode, selecting and sizing BMP's to achieve a given treatment objective. The program automatically scales BMP's to match user-defined watersheds, storm time series, target particle class, and target removal efficiency.

These applications are insensitive to errors associated with predicting untreated runoff water quality and are therefore more accurate than predictions of concentrations or loads. Note that a treatment objective (removal efficiency and particle class) must be defined by the user. Section 8.0 discusses treatment objectives.

Secondary uses of the model are for making "absolute" predictions of the following types:

- (1) Predicting runoff water quality, loads, violation frequencies;
- (2) Predicting water quality impacts due to proposed developments (e.g., upstream vs. downstream changes, existing vs. future changes);
- (3) Generating loads for driving receiving water quality models;
- (4) Watershed-scale or basin-scale landuse planning (e.g., zoning issues).

These applications are subject to greater error because of the high degree of site-to-site and storm-to-storm variability associated with urban runoff quality. Local calibration may reduce absolute prediction error, but is rarely feasible.

## 2.0 PROGRAM MECHANICS

P8 runs on an IBM-PC or compatible microcomputer with 640K memory, hard disk, and MS-DOS operating system. To speed computations, an AT (80286 processor) or higher class with a numeric coprocessor is recommended. The program and sample files occupy approximately 1.2 megabytes of disk space. An additional 1 megabyte of disk space is recommended for working files (more for long simulations). Typical run times are on the order of .4 to 3 minutes per device per year of storms simulated for AT or higher class machines with numeric coprocessors. The program is written in FORTRAN-77 and compiled using the Microsoft, Inc. Version 5.0 optimizing compiler (emulator library). Supporting subroutine libraries (graphics, screen control, character manipulation) include ASMUTIL2 and BUTILE from Impulse Engineering, San Francisco.

The structure and capabilities of the program are summarized in the Appendices to this report:

- APPENDIX A - Menu Structure
- APPENDIX B - Data Entry Screens
- APPENDIX C - Output Screens
- APPENDIX D - Help Screen Index

Appendix E contains step-by-step procedures for installing the program, running sample problems or "CASES", entering new cases, and using the program for designing BMP's.


The program is operated from a MENU, which occurs in a blue box at the top of the screen, as illustrated in Figure 1. The bottom portion of the menu screen describes the current case. The menu provides access to ~120 program functions, as outlined in Appendix A. Major menu headings include:

- 'Case' - Enter, Edit, Read, List, or Save Input Data
- 'Run' - Execute Model
- 'List' - List Output (Several Formats)
- 'Plot' - Plot Output (Several Formats)
- 'Utilities' - Supplementary Functions
- 'Help' - View Help Screens
- 'Quit' - End Session and Return to DOS

Operation is similar to a spreadsheet. Cursor arrows can be used to maneuver around the menu. A faster method is to enter the first letter associated with the desired choice at each menu level (e.g., 'CEDI' - 'Case Edit Device Index'). Press <F7> to get help on menu operation.

HELP SCREENS provide online documentation for the program. These are accessed by pressing the HELP KEY <F1> from the main menu, edit screens, or data-entry screens. To view a help screen for any procedure in the

Figure 1  
P8 Main Menu Screen

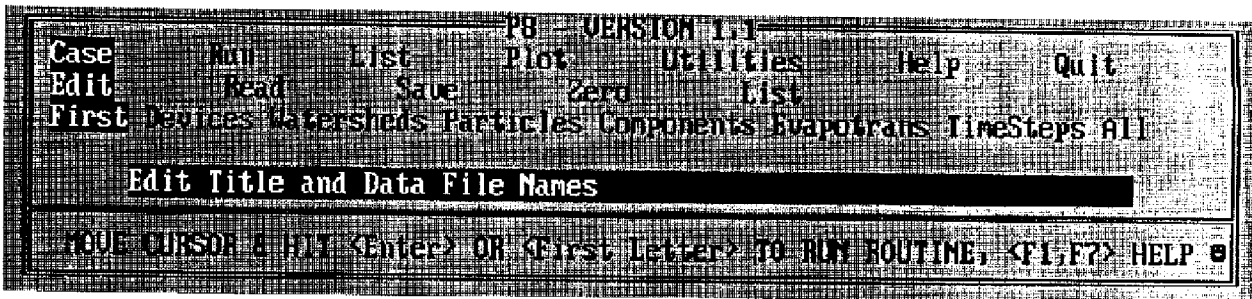

CASE FILE	=	DEFAULT.CAS
CASE TITLE	=	P8 startup case
STORM FILE	=	type2.stm
DATE RANGE	=	0 TO 0
AIR TEMP. FILE	=	prov6988.tmp
PARTICLE FILE	=	SIMPLE.PAR
WATERSHEDS	=	1
TREATMENT DEVICES	=	1
TRACED DEVICES	=	0
PARTICLE FRACTIONS	=	1
WATER QUALITY COMP	=	0

**OUTPUT ROUTED TO: SCREEN**

**Menu Operation**

Program MENU is a Tree with Up to 4 LEVELS and 10 CHOICES Per LEVEL. Operation is similar to spreadsheet menus.

To Make a CHOICE at a given LEVEL:  
Use Cursor Arrows to Find Desired Procedure  
    <LEFT> <RIGHT> <HOME> <END> to Move Around Current LEVEL  
    <ENTER> to Make CHOICE  
or:  
    <First letter> to Jump Directly to CHOICE

Press <UP>, <ESC>, or <PgUp> to Move up One LEVEL.

Once a CHOICE is made, the following will occur:  
    If CHOICE is at End of Branch, Execute Corresponding Procedure.  
    else  
    Move Down one LEVEL to Next Set of CHOICES

Press <F1> to get HELP regarding a particular ITEM.  
Press <F7> to display this screen.

main menu, move the cursor to that procedure and press <F1>. To view a help screen for any output screen, press <F1> in response to screen hold <H> prompt in lower left-hand corner. In addition, help screens are accessed from the 'Help' selection on the menu, or by running the independent utility 'HELP.EXE' from DOS. These utilities permit the user to view help screens in groups, organized by topic, or to search the help file for all screens containing a user-defined phrase.

The program runs in either of two USER MODES, depending upon the user's level of experience:

**NOVICE MODE**  
**ADVANCED MODE**

The NOVICE MODE (default) provides access to basic program functions but prevents access to supplementary functions which new users may find relatively difficult to follow. The number of choices available from the program menu is limited. The ADVANCED MODE provides access to all functions and options. At startup, the program is set to NOVICE MODE. To change to ADVANCED MODE (or vice-versa), press <SHIFT><F1> keys simultaneously from any location in the program menu. A message will appear indicating the new mode. Press any key to continue. A symbol in the lower right hand corner of the menu box indicates the user mode (☉ = NOVICE MODE, ⊙ = ADVANCED MODE). Appendix A indicates procedures which are available in each mode.

### 3.0 MODEL INPUTS

Input data for each model application or "CASE" are specified on input screens described in Appendix B. Each CASE has the following maximum dimensions:

24 WATERSHEDS  
24 DEVICES  
5 PARTICLE CLASSES  
10 WATER QUALITY COMPONENTS

General features of these input groups are described below.

#### 3.1 Watershed and Device Characteristics

**WATERSHEDS** are the sources of flow and particles simulated by the program. They are defined based upon factors controlling runoff and particle export (total area, impervious fraction, depression storage, SCS curve number for pervious areas, street-sweeping frequency). The model simulates runoff from pervious and impervious surfaces and particle buildup/washoff from impervious surfaces. Watershed runoff and percolation can be routed to specified **DEVICES**.

**DEVICES** provide collection, storage, and/or treatment of watershed discharges. Devices are defined based upon factors controlling hydraulic response and particle removal efficiency (elevation/area table and elevation/discharge tables for up to three outlets (1 = infiltration, 2 =

normal outlet, 3 = overflow/spillway). Specific inputs vary with device types, as illustrated in Figure 2:

- 1 = Detention Pond (Wet, Dry, Extended)
- 2 = Infiltration Basin (Online, Offline)
- 3 = Swale/Buffer (Overland Flow Area)
- 4 = General (User-Defined Elev/Area/Outflow Table)
- 5 = Pipe/Manhole (Collector with One Outlet)
- 6 = Splitter (Collector with Two Outlets)
- 7 = Aquifer (Approx. Groundwater Budget, Baseflow Calc.)

Routing from one device to another is accomplished by specifying downstream device numbers for each outlet. A downstream device number of 0 is used to route flow and loads out of the system (to receiving waters). The linkage of watersheds and devices is illustrated in Figure 3. The program keeps track of volume and mass fluxes into and out of each device, as well as changes in storage. Program output formats (tables, graphs) summarize this information in various ways.

### 3.2 Particle and Water Quality Component Characteristics

**PARTICLE CLASSES** are defined based upon factors controlling watershed export (accumulation/washoff parameters for impervious areas, fixed runoff concentrations for pervious and/or impervious areas, street-sweeping efficiency) and behavior in treatment devices (settling velocity, decay rates, filtration efficiency).

**WATER QUALITY COMPONENTS** are defined based upon their weight distributions across particle classes (mg/kg). Three standards or criteria may be specified for each water quality component. These can be used to estimate violation frequencies, based upon comparison with the frequency distributions of event-mean outflow concentration for any device and storm sequence.

Default values for **PARTICLE CLASSES** and **WATER QUALITY COMPONENTS** are provided, based upon calibration to "typical urban runoff" values measured under the EPA's Nationwide Urban Runoff Program (Athayede et al, 1983). The following **WATER QUALITY COMPONENTS** are considered in the default calibrations: total suspended solids, total phosphorus, total Kjeldahl nitrogen, lead, copper, zinc, hydrocarbons. Section 6.0 of this report describes the default calibrations. They may be modified by the user to reflect site-specific measurements and/or alternative modeling assumptions.

To load a particle/component input file from the main menu, type 'CRP' (Case Read Particles) and press <Enter>. A list of available particle files will appear. Use the cursor arrows or space bar to point to desired file name, and press <Enter>. The following sample input files containing particle and water quality component parameters are provided:


#### **NURP50.PAR**

distribution of particle settling velocities derived from NURP studies (USEPA, 1986); component concentration calibrated to NURP 50th percentile (median) sites (Athayede et al, 1983).


Figure 2

# P8 DEVICE TYPES


## 1 = DETENTION POND

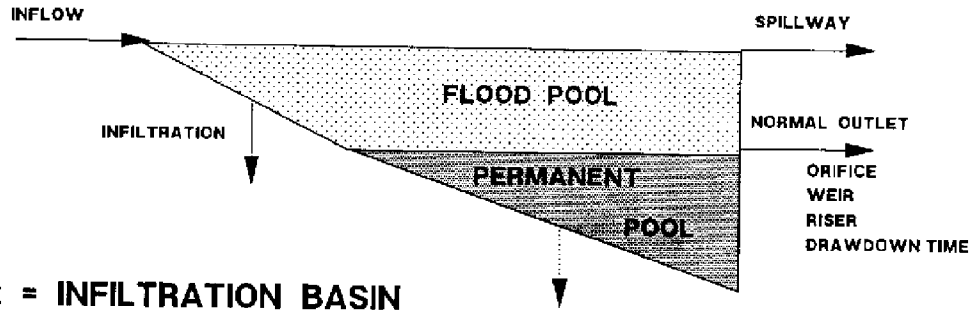


## 2 = INFILTRATION BASIN

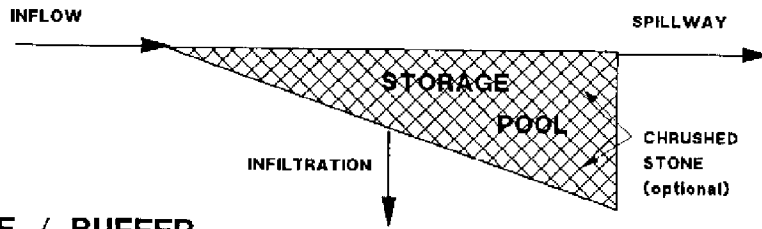


## 3 = SWALE / BUFFER

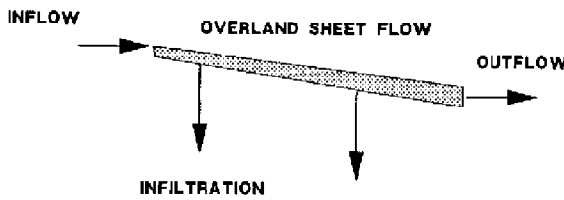


## 4 = GENERAL DEVICE



## 5 = PIPE / MANHOLE

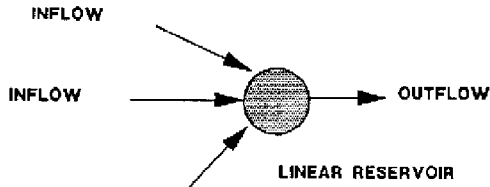

## 7 = AQUIFER

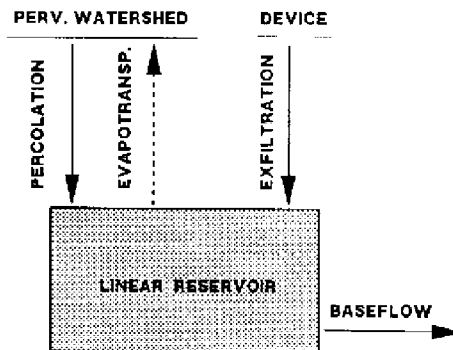

## 6 = SPLITTER


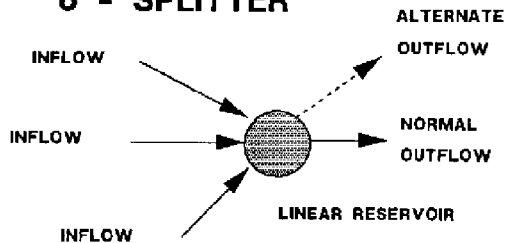


Figure 3

# P8 MASS-BALANCE SCHEMATIC

## WATERSHED TREATMENT DEVICE

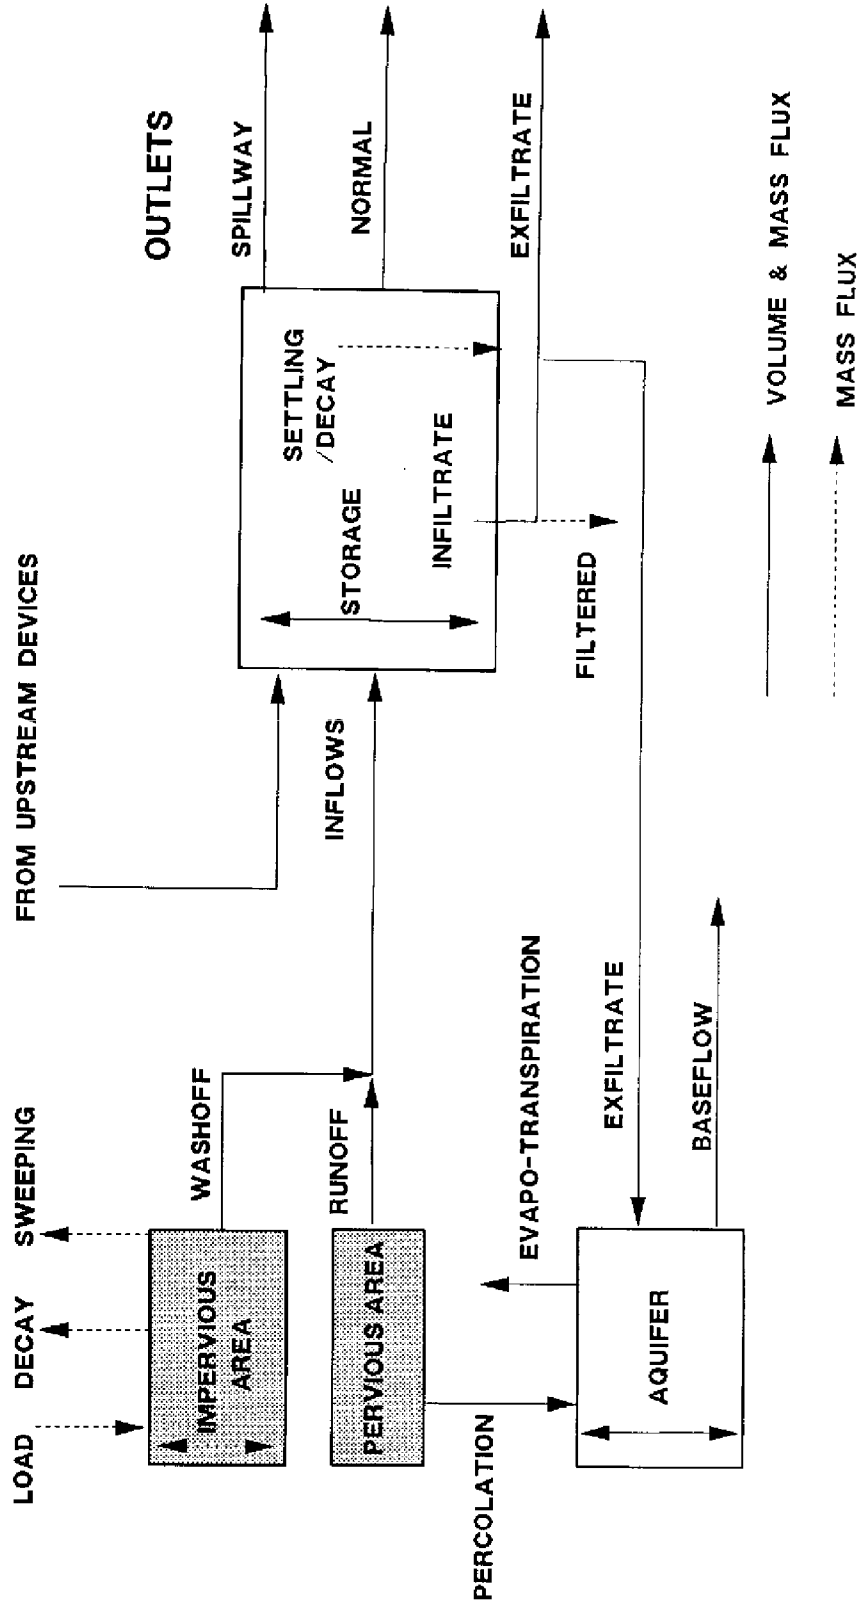

**NURP90.PAR**

same as NURP50.PAR, except component concentrations calibrated to NURP 90th percentile sites; these will generally predict runoff concentrations which are 2-3 times higher than those predicted by NURP50.PAR.

**SIMPLE.PAR**

a simple case (one particle class = NURP 10th percentile setting velocity) for preliminary runs; requires less run time than other files, which include five particle classes; runoff treatment criteria may be based upon a single particle class (See Section 8.0).

**BARESOIL.PAR**

NURP50.PAR with pervious runoff parameters adjusted to give TSS concentrations typical of runoff from construction sites (~10,000 ppm, Schueler, 1987).

Any additional particle input files are listed and described in the 'PARTIC.DOC' file contained on the distribution disk.

### 3.3 Precipitation and Air Temperature

The distribution diskette contains precipitation and air temperature measurements from Providence Airport. Runoff simulations are driven by hourly precipitation time series, summarized on a storm-event basis. A routine is provided to convert hourly precipitation files available from the National Climatic Data Center for any NOAA Weather Station into the appropriate format. There is no limit (except for disk storage capacity) on the length of rainfall files. Longer files and larger cases will naturally require more computer time.

The following input files containing storm event sequences for use with the model are provided:

**PROV##.STM**

yearly file from Providence Airport  
## = year            type (see Section 7.4)  
  = 65, 81           "dry years"  
  = 74, 76, 80       "average years"  
  = 79, 83           "wet years"  
  = 6987             1969 thru 1987

**TYPE2.STM**

24-hour, SCS Type 2 Storm, 1-inch, 75-hr interval  
Longterm average TSS removal efficiencies can be estimated by running this storm file (see Section 7.4).

**AVERAGE.STM**

one average storm, .4 inches, 6-hr duration, 75-hr interval

The desired file name is entered in the first case input screen; from the main menu, type 'CEF' (Case Edit First). Any additional storm input



files are listed and described in the 'STORMS.DOC' file contained on the distribution diskette.

Before starting a simulation, model state variables (particle buildup on impervious watershed surfaces, device storage volumes, device concentrations) are initialized. In order to purge effects of initial conditions, it is necessary to run the model for a number of storms before saving results. This is done by specifying the following dates on the first 'CEF' input screen:

```
START DATE (YYMMDD format)
KEEP DATE      "
STOP DATE      "
```

The storm file 'PROV6987.STM' can be specified for simulating any date interval between 1969 and 1987, inclusive. The model skips storms in the specified storm file until the START DATE is encountered, at which point the simulation begins. If the START DATE = 0, simulation begins with the first storm contained in the storm file. Simulation continues (but without saving results) until the specified KEEP DATE is encountered, on and after which results are saved. If KEEP DATE = 0, all simulation results are saved. The simulation continues until the STOP DATE is encountered, or until the end of the storm file, whichever occurs first.

The minimum duration of the startup period (KEEP DATE - START DATE) depends upon the storage or "memory" of the devices included in the simulation. A month is usually more than adequate for simulating runoff treatment devices. Cases involving aquifers or other devices with long times of concentration would require longer warmup periods to flush out initial conditions (at least  $\geq$  time of concentration). When in doubt, sensitivity to startup period can be investigated on a case-by-case basis (e.g., compare removal efficiencies computed with 1-month vs. 2-month startup period for same KEEP and STOP DATES).

As alternatives to real rainfall sequences, single 'design storms' can also be simulated. These are defined based upon an hourly rainfall sequence, followed by a specified dry-weather period. Examples are 'TYPE2.STM' and 'AVERAGE.STM'. When using a design storm, set the START DATE, KEEP DATE, and STOP DATE to 0. To purge initial conditions, the design storm can be repeated for a specified NUMBER OF PASSES. Results are saved only on the last PASS. Five PASSES are usually adequate for simulating runoff treatment schemes using TYPE2.STM (1-inch, 24-hr storm with 51-hour dry-weather period). Effects of alternative PASSES can be easily checked by adjusting the input value and re-running the model.

Air temperature data are required only if the device network includes an AQUIFER (TYPE=7) for simulation of baseflow. The daily air temperature record for Providence Airport between 1969 and 1988 is contained in the file 'PROV6988.TMP'. This file is specified on the evapotranspiration input screen ('CEE' = 'Case Edit Evapotrans'). Specification of daily air temperature data is transparent to the model user, as long as storm dates between 1969 and 1988 are simulated. If storm dates are outside of this range or if the air temperature file is not specified, longterm monthly

mean air temperatures are used, as defined on the evapotranspiration input screen.

### 3.4 Sample Case Files

The program distribution disk contains a number of sample input files which illustrate various model applications and can serve as templates for building new applications. The 'CASES.DOC' file contains an updated list and description of sample cases. Running sample cases is recommended before attempting to define and enter new cases. To load a sample case file from the main menu, type 'CRA' ('Case Read All'), press <Enter>, use cursor or space bar to point to desired input file, and press <Enter>. Sample input files describe simple cases for program demonstration purposes:

#### **DEFAULT.CAS**

simple case for preliminary testing one watershed, one device (wet pond), one particle class; automatically read when program is first loaded.

#### **TEST.CAS**

illustrates each type of treatment device; many devices are run simultaneously in parallel; each device has same watershed characteristics

The following case input files describe actual stormwater control systems under design/operation in New England:

#### **TRACER.CAS**

One Tracer Lane Development, Lexington, MA  
Offline Infiltration Basin, Detention Pond in Series

#### **ESM\_L.CAS**

Emerald Square Mall, N. Attleborough, MA  
Lower Watershed  
2 Detention Ponds, Swale, 3 Wetland Cells in Series

#### **ESM\_U.CAS**

Emerald Square Mall, N. Attleborough, MA  
Upper Watershed  
Detention Pond, 3 Wetland Cells in Series

#### **HUNT.CAS**

Hunt-Potowomut River, Narragansett Bay, RI  
Watershed-Scale Application, with Baseflow Simulation

Schematic diagrams for selected cases are shown in Figures 4.


### 3.5 Entering New Cases

Appendix E outlines recommended procedures for defining and entering a new case. The process is facilitated by first constructing a schematic diagram of the site which illustrates the linkage of watersheds and treatment devices (similar to diagrams used in TR-20 applications).



Figure 4

# SCHEMATIC DIAGRAMS - P8 TEST CASES

## ONE TRACER LANE, LEXINGTON, MA

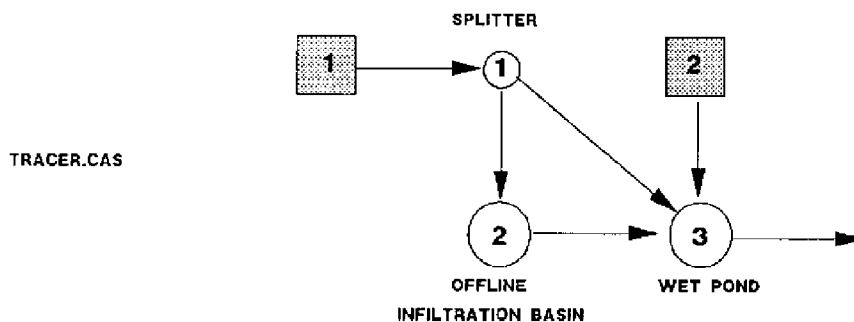

## EMERALD SQUARE MALL, N. ATTLEBORO, MA

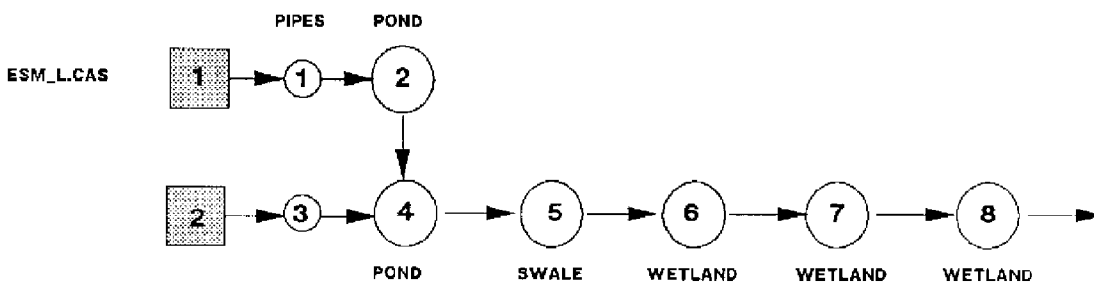

WATERSHED



DEVICE



Appendix B illustrates the screens which are used to enter or edit data. Help screens designed to assist the user in estimating various input values (curve numbers, infiltration rates, etc.) are also printed in Appendix B. Data entry/editing is performed using the following commands:

COMMAND	DATA GROUP
CEF	Case Title & Storm File
CEDI	Device Index
CEDD	Device Data (Separate Screen for Each Device Type)
CEWI	Watershed Index
CEWD	Watershed Data (Separate Screen for Each Watershed)
GEE	Evapotranspiration Parameters (Optional)
GET	Simulation Time Steps
CEP	Particle Characteristics
CECF	Water Quality Components

Editing of particle and water quality component input data is permitted only in the program's ADVANCED USER MODE; press <Shift-F1> to switch user modes.

A HELP SCREEN (shown on the bottom of each page in Appendix B) provides online documentation for each data entry screen. Help screens are accessed by pressing <F1>. In addition, a one-line help message appears at the bottom center of each data-entry screen and refers to the current cursor location. More detailed help on certain data input values (e.g., infiltration rates, Curve Numbers, Manning's n) are accessed by pressing <F8> when pointing to the input field on a data-entry screen. Some input fields are checked for valid ranges and warning messages are flashed accordingly. To access the program's general HELP utility from a data entry screen, press <F9>.

Input data can be listed using the 'CLS' (= Case List Site) command, stored in a disk file using 'CSI' (= Case Save Inputs), and subsequently retrieved using 'CRA' (= Case Read All).

In order to track results for each time step, devices must be **TRACED**. Trace switches are set using the 'UT' = 'Utilities Trace' command (ADVANCED USER MODE). Tracing is not required unless plotting of within-event variations or daily-average values is desired. Since tracing consumes disk space and computer time, devices should be traced only when necessary.

Once the input data have been entered for a given case, the model must be executed via the 'RM' (= 'Run Model') command. Input values are checked for validity and error messages (if any) are issued. The sequence of storms is tracked on the screen until the simulation is completed. A red message 'MODEL EXECUTED' appears in the lower right corner of the menu screen to indicate that the simulation is complete.

When the model is executed for a given set of input values and storm sequence, results are saved in temporary disk files for subsequent use by listing and plotting routines. Stored values normally include event total flows and loads for each device, particle class, and mass-balance term. Output routines (tables, graphs) are accessible from the menu as long as

the "MODEL EXECUTED" message appears. This message disappears when input values are edited or when a new case is loaded from disk.

To store output values on disk for later retrieval and review, use the 'Case Save Archive' command. This saves both the input and the output values for the current case. Use 'Case Save Inputs' to save input values only. The archive format consumes more disk space but permits future review of output without re-running the simulation.

#### 4.0 MODEL OUTPUTS

##### 4.1 Simulation Results

Simulation results are stored in temporary disk files for access by reporting and graphing routines. Tabular output formats include the following:

- BALANCES** - water and mass balances by device and component
- REMOVALS** - removal efficiencies by device and component
- TERMS** - comparison of flow, loads, and concs. across devices
- VIOLATIONS** - violation frequencies for event-mean concentrations
- PEAKS** - elevation and outflow ranges for each device
- SEDIM** - sediment accumulation rates by device
- MEANS** - mean inflow or outflow concs by device and component
- DETAILS** - detailed statistical summaries by device and component
- CONTINUITY** - continuity (mass-balance) check on simulation results

Tabular output may be displayed on the screen or routed to a disk file for subsequent printing or other use (see 'UO' = 'Utilities Output').

Graphic output (to screen only) is available in the following formats:

- EVENTS**    precip., flows, loads, concs., etc., in 5 formats:
  - time series
  - cumulative time series (running totals)
  - cumulative frequency distributions
  - lognormal frequency plots
  - scatter plots
- DAILY**    time series of daily total precip., volumes, or flows  
(available for TRACED devices only)
- MONTHLY**    time series of monthly total precip., flows, or loads
- YEARLY**    time series of yearly total precip., flows, or loads

**TRACED** detailed time series of precipitation, elevation, volume, discharge, concentrations, or loads for specific devices.

Independent screen-dump utilities may be used to print screen displays. (See 'Help - Program Operation - Printing Graphs' for a list of such utilities). Plot data may be dumped to disk in ASCII format convenient for input to spreadsheets or word processors (Press "d" when viewing graphic screen). Graphic routines have been developed primarily for use in model development and testing. Advanced users will find these routines helpful for developing an understanding of the hydraulic and water quality dynamics of individual cases. Graphic routines are accessible only in the **ADVANCED USER MODE** <Shift-F1>.

Appendix C illustrates tabular and graphic output formats. Help screens associated with each output screen (shown on the right in Appendix C) and are accessed by pressing <F1> in response to the screen hold prompt <H> which appears in the lower left hand corner of the screen. Aside from holding the screen and providing help access, the <H> prompt provides a way of stopping execution of a current procedure. Some output procedures produce several screens in series; to stop the output sequence and return to menu, press <Esc> when the <H> prompt occurs. In general, the <Esc> key (sometimes hit more than once) provides the fastest route back to the program menu.

#### 4.2 Design Functions

The model can be used in a "design mode" to select and size devices appropriate for treating runoff from specified watershed(s). Appendix E contains step-by-step procedures for using the program in a design mode.

One procedure ('RDL' = 'Run Design Lookup') selects and sizes a device to achieve ~70% or ~85% total suspended solids removal for one user-defined watershed. To use this routine, a valid case with at least one watershed and one device must be pre-defined. The program disk contains a catalogue of devices sized to achieve total suspended solids removal efficiencies of 70% and 85%, based upon simulation of Providence 1980 rainfall data (see Sections 7.4 and 8.0, Figure 24, Tables 8-9). Devices are defined based upon type (wetpond, buffer, etc.) and other factors determining TSS removal (mean depth, flood pool drawdown time, infiltration rate, etc.).

The user specifies the watershed to be treated, the device prototype, and the location (device number) for the new device (overwrites any pre-defined device). To size the device for the specified watershed, device areas and volumes are rescaled based upon ratio of device area to impervious watershed area. This represents an "initial guess" of design requirements for a particular watershed, device type, and TSS removal objective. This design can be modified to suit site characteristics and constraints. Performance can be estimated using the 'RM' (= Run Model) command.

Another procedure ('RDT' = 'Run Design Tune') tunes or rescales device(s) to achieve a user-defined removal efficiency for any particle class or water quality component. In order to use this procedure, the

user must first define a case containing a preliminary design and execute it via the 'Run Model' command. The user is prompted for the list of devices to be rescaled, target particle class, and target removal efficiency. Rescaling options include areas, volumes, and outlet capacities (for detention ponds only). The model is run repeatedly using the specified storm sequence. An iterative solution is attempted for the device SCALE FACTOR, using the Newton-Raphson technique (Burden et al., 1981). Device dimensions are multiplied by the SCALE FACTOR to achieve the target removal efficiency. Solutions are not always feasible. A maximum of 12 iterations is performed.

#### 4.3 Sensitivity Analysis

Another procedure ('RS' = 'Run Sensitivity') tests sensitivity of removal efficiency and device outflow concentration to each model input value. Each input value is increased by a fixed percentage (one at a time). The model is re-executed. Effects on removal efficiency and outflow concentration are tabulated. Tested inputs include watershed variables, device variables, particle parameters, and storm scale factors. This procedure is especially useful for obtaining perspectives on which model inputs have the greatest impact on model predictions and are therefore most important to estimate accurately (Walker, 1982). Calculations may be lengthy; overnight computer runs may be convenient. Trial runs on short storm sequences are recommended. The procedure can be stopped at any time by pressing <Esc>.

Because it has a maximum feasible value of 100, the SCS curve number (used for predicting runoff from pervious watersheds) is treated differently than other input values in the sensitivity analysis. Instead of increasing the curve number by 25% (which may lead to curve numbers exceeding 100), the corresponding value for the maximum soil moisture retention (=  $1000/CN-10$ , inches, USDA/SCS(1964)) is decreased by 25%.

#### 4.4 Flow Calibration

Calibration of the model to predict measured daily flow time series is facilitated by the 'RC' (= 'Run Calibrate') command. This procedure compares predicted daily-mean outflow time series from a specified device with measured values contained in a disk file. Observed flow data are stored in free-format, ASCII files, one line per month (example = 'HUNT.FLO'). The model must be executed beforehand ('RM' command) and the device used in the calibration must be traced in order to obtain daily output values ('UT' = 'Utilities Trace' command). The program merges observed and predicted daily flows by date. Moving averages are calculated at a user-defined interval. Observed and predicted time series are plotted and compared statistically. Flow calibration typically involves adjusting times of concentration (for surface runoff and baseflow) to match observed time series for short (1-day) and long (e.g. 30-day) averaging intervals. Application to the Hunt-Potowomut watershed is described in Section 7.3. This procedure is not relevant to designing BMP's for individual developments.

## 5.0 SIMULATION METHODS

### 5.1 Watershed Runoff Volumes

Runoff from pervious areas is computed using the SCS curve number technique (USDA,1964). Haith and Shoemaker (1987) demonstrate use of the SCS method for continuous watershed simulations. Antecedent moisture conditions (AMC's) are adjusted based upon 5-day antecedent precipitation and season. In calculating AMC's, the "growing season" is assumed to extend from May through October (Haith and Shoemaker,1987).

Although several other techniques are available for predicting runoff from pervious areas (Huber and Dickinson,1988; Donigian et al., 1984), the SCS technique has been selected because it is easily parameterized in terms which are familiar to the planner/engineer (Curve Numbers). The model is designed primarily for use in urban watersheds, where impervious surfaces are the primary sources of runoff and contaminant load. Since pervious and impervious areas are modeled separately, curve numbers refer to the pervious portion of the site only (reflecting soil types and vegetative cover, not impervious area!). Use of SCS tabulated curve numbers for urban land uses in P8 will result in double-counting of impervious areas and will overpredict runoff volumes. A help screen is provided to facilitate estimation of curve numbers (press <F8> when pointing to Curve Number input field on data entry screen, or see 'Help - Site Parameter Estimation'). Pervious portions of urban watersheds may suffer from compaction; curve numbers should be estimated conservatively (on the high side).


Percolation from pervious areas is estimated by difference (rainfall - runoff - evapotranspiration). Percolation is not tracked unless explicitly routed to an "AQUIFER" (Device Type = 7), which can be used to predict stream baseflow. Evapotranspiration is computed from air temperature and season using Hamon's (1961) method, as implemented by Haith and Shoemaker (1987). Air temperatures can be specified on a daily basis (linked by date to rainfall sequence) or on a longterm monthly-average basis (as entered via the 'Case Edit Evapotrans' input screen). Both daily and monthly air temperature data from Providence Airport are supplied with the program (Section 3.3). Specification of air temperatures and routing of percolation are relevant only if the device network contains an AQUIFER and predictions of baseflow are desired.

Runoff from impervious areas starts after the cumulative storm rainfall exceeds the specified depression storage. Thereafter, runoff rate equals rainfall intensity. All precipitation is assumed to be rainfall. Consideration of snowfall and snowmelt is recommended for future versions of the program. A help screen is provided to facilitate estimation of watershed impervious fraction based upon land use.

Watershed runoff is transported directly to downstream devices (without lag). This assumes that the watershed time of concentration is small in relation to the rainfall time step (1 hr), generally the case for individual urban developments. Large watersheds will respond more slowly than predicted. To retard watershed responses, runoff can be routed to a "pipe" (Device Type = 5) with a positive time of concentration. Figure 5



**Figure 5**  
**Effect of Time of Concentration on Watershed Response**

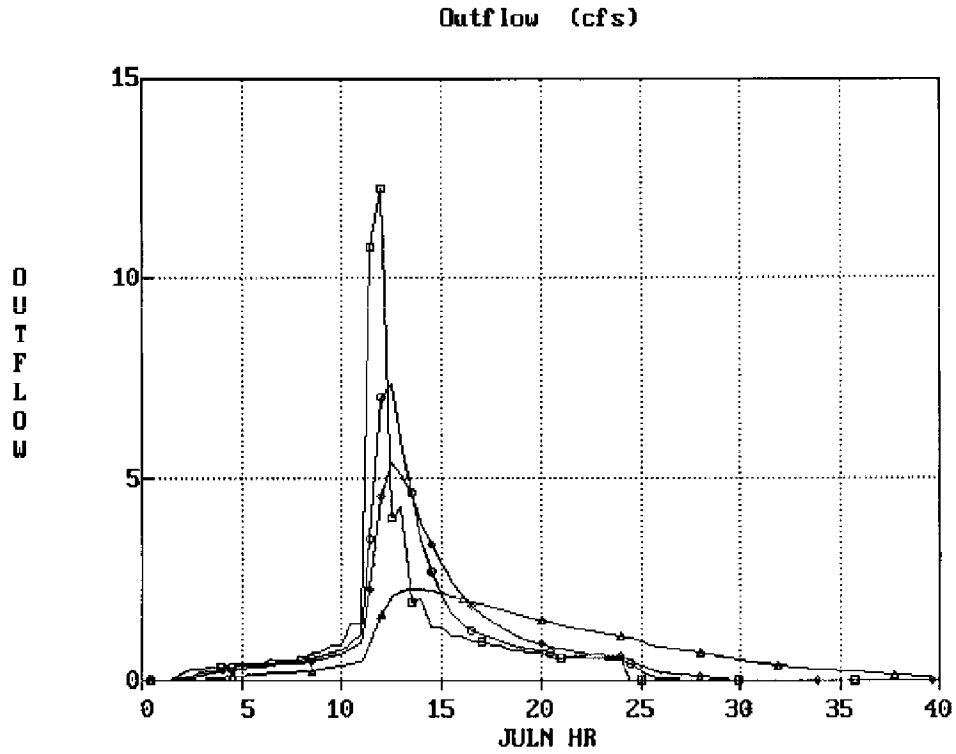

□ toc=0   ○ toc=2   ♦ toc=4   ▲ toc=16

TOC = time of concentration (hours)

Storm = 24-hr, SCS TYPE II distribution, 1-inch

shows watershed responses for various times of concentration. Putting two or more pipes in series will impose a delay on the response (in addition to decreasing peak flow). Sensitivity analyses (Section 7.2) indicate that BMP removal efficiencies are usually insensitive to watershed time of concentration. Note that lags or delays in storm hydrographs which are caused by storage in upstream devices (e.g., detention ponds) are simulated by the model.

## 5.2 Watershed Loads

Particle concentrations in runoff from pervious areas are computed using the following empirical equation:

$$C_p = C_{po} I^f$$

where,

$C_p$  = particle concentration in pervious runoff (ppm)

$C_{po}$  = concentration at a runoff intensity of 1 inch/hr (ppm)

$I$  = runoff intensity from pervious area (in/hr)

$f$  = exponent (~1)

This is similar to the sediment rating model included in SWMM (Huber and Dickinson, 1988). Based upon typical sediment rating curves for rivers, values of the exponent ( $f$ ) range from 0.1 to 1.6, with most values near 1.0 (Huber and Dickinson, 1988). If percolation from pervious areas is routed to an aquifer (Device Type= 7), concentration in percolating flow is assigned to the runoff concentration ( $C_p$ ), reduced based upon the "filtration efficiency" defined for each particle class (Section 6.3).

Particle loads from impervious areas are computed using two techniques:

- (1) particle accumulation and washoff
- (2) fixed runoff concentration

Either or both of these methods may be used; results are totaled. The first method is used in default particle data sets.

The following differential equation describes the simulation of particle buildup and washoff on impervious surfaces, as implemented by the model:

$$\frac{dB}{dt} = L - k B - f s B - a r^c B$$

where,

$B$  = buildup or accumulation on impervious surface (lbs/acre)

- L = rate of deposition (lbs/acre-hr)
- k = rate of decay due to non-runoff processes (1/hr)
- s = rate of street sweeping (passes per hr)
- f = efficiency of street sweeping (fraction removed per pass)
- a = washoff coefficient
- c = washoff exponent
- r = runoff intensity from impervious surfaces (in/hr)

The exponential washoff relationship is similar to that employed in EPA's Stormwater Management Model (SWMM, Huber and Dickinson, 1988). The parameters "a" and "c" are analogous to SWMM's "RCOEFX" and "WASHPO", respectively. Values are updated using the analytical solution of this equation for each time step. At the start of the simulation, B values are set equal to one day's worth of deposition.

Computed loads from pervious and impervious areas are multiplied by a constant "Pollutant Load Factor" specified for each watershed. This factor (normally = 1) can be used to adjust for differences in loading intensity due to land use, for example, if sufficient calibration data are available. The load factor can also be adjusted to account for areas which are not expected to contribute contaminants (e.g., = 0 for a 'watershed' representing the surface of a pond).

### 5.3 Device Flows

When the model is executed (via the 'RM' = 'Run Model' command), the watershed/device network is first sorted in downstream order. If this is impossible, the network contains feedback loops and a warning is issued. An elevation/volume/discharge table is calculated for each device based upon input information. This information is entered directly by the user in the case of a General Device (Type=4). The table directs flow-balance calculations using methods described below.

Flow and mass routing is performed in downstream order. For each device and outlet, the relationship between storage volume and outflow is represented by the following linear approximation:

$$Q = d_0 + d_1 V$$

where,

Q = outflow for a given device and outlet (ac-ft)

V = current device volume (ac-ft)

$d_0$  = intercept of outflow vs. storage volume curve (ac-ft/hr)

$d_1$  = slope of outflow vs. storage volume curve (1/hr)

Values of  $d_0$  and  $d_1$  are updated at each time step, based upon interpolation from the elevation/area/volume/outflow table developed for each device.

Linearization of the storage/outflow relationship in the above manner permits analytical solution of the device flow balance at each time step:

$$\frac{dV}{dt} = Q_{in} - \text{SUM} [ Q ]$$

The analytical solution for volume increase is as follows:

$$V_2 - V_1 = F(V, t) \\ = A/K + (V_1 - A/K) \exp(-K t) - V_1$$

$$A = Q_{in} - \text{SUM} [ d_0 ]$$

$$K = \text{SUM} [ d_1 ]$$

where,

$V_1, V_2$  = volume at start and end of time step (ac-ft)

$Q_{in}$  = total inflows to device; from watersheds and upstream devices (ac-ft/hr)

SUM = sum over device outlets (infiltration, normal, spillway)

$t$  = time step length (hours)

Since the slope and intercept ( $d_1$  &  $d_0$ ) may vary with volume and elevation, a three-stage procedure is used to estimate the volume change at each time step. The following calculations are performed in sequence:

$$V_m = V_1 + .5 F(V_1, t)$$

$$V_2 = V_1 + F(V_m, t)$$

$$V_m = (V_1 + V_2)/2$$

$$V_2 = V_1 + F(V_m, t)$$

$$V_m = (V_1 + V_2) / 2.$$

where,

$V_m$  = average volume during time step (ac-ft)

Device volumes are constrained to maximum values consistent with input data specifications. Excess inflows are discharged through the "spillway"

(Outlet Number 3). Device areas and elevations are updated by interpolating against  $V_m$  in the elevation/area/discharge table.

Continuous water-balance and mass-balance checks are maintained on each device and on the overall device network. A warning message is issued if continuity errors exceed the maximum value specified on the timestep input screen ('Case Edit Timesteps'). Continuity errors can be reduced by specifying shorter simulation time steps. Continuity errors are more likely for devices with large, rapid fluctuations in volume (e.g., buffers/swales). Typical time step lengths are .25-1 hours during storm periods and 2-8 hours for dry periods for volume continuity errors less than 2%. Sensitivity of device performance to time step lengths can be tested by adjusting lengths and re-running the model.

#### 5.4 Device Outlet Capacities

Manning's equation (Bedient and Huber, 1988) is used for predicting flow velocities in overland flow areas (buffers/swales, device type = 3):

$$u = 1.49 r^{2/3} s^{1/2} / n$$

where,

$u$  = overland flow velocity (ft/sec)

$r$  = hydraulic radius = cross-section/wetted perimeter (ft)

$s$  = slope (ft/ft)

$n$  = Manning's  $n$

A trapezoidal geometry is assumed for calculating the hydraulic radius at any elevation, based upon input buffer dimensions (bottom width, side slope, maximum depth).

The maximum depth of overland flow (input variable) is defined as the maximum depth at which the specified value of Manning's  $n$  applies. According to TR-55 (USDA/SCS, 1985), this value is on the order of .1 feet. High values of  $n$  typically used for grassed areas (.2-.4) assume that flow is in contact with the vegetation. The specified maximum depth should not exceed the effective vegetation height. The model constrains buffer flow depth to the specified maximum value. If this depth is reached, routing based upon Manning's equation stops and excess inflows are forced through the device at a fixed water depth and hydraulic cross-section. This procedure is conservative with respect to predicting overland flow velocities because flow depths would actually continue to increase, but be governed by lower  $n$  values. Model testing indicates that predicted particle removal efficiencies are generally insensitive to the specified maximum depth of overland flow. Predicted peak flow velocities (for comparison with erosion/scouring criteria, typically ~4 ft/sec, RIDEM (1988)) can be sensitive to maximum flow depth, however, and are likely to be conservative (over-estimated). Future investigation of alternative procedures for handling high flow depths in buffers (including direct simulation of particle scouring) is recommended.

Detention pond (type=1) outlet capacities are calculated from input dimensions using standard hydraulic formulae for weirs and orifices (Bedient and Huber, 1988):

$$q_w = c_w l_w h^{1.5}$$

$$q_o = c_o a_o (2 g h)^{1/2}$$

where,

$q_w$  = weir flow (cfs)

$c_w$  = weir coefficient ~ 3.33

$l_w$  = weir length (ft)

$h$  = height above weir crest or above orifice centerline (ft)

$q_o$  = orifice flow (cfs)

$c_o$  = orifice coefficient ~ .6

$a_o$  = orifice area (ft<sup>2</sup>)

$g$  = acceleration of gravity = 32.2 ft/sec<sup>2</sup>

Outlet dimensions (orifice diameter, weir length) and discharge coefficients are supplied on the data-entry screen for detention ponds (see Appendix B). If flood pool drawdown time is input directly (based, for example, upon output from TR-20 or other flood routing model), the assumed shape of the drawdown curve is similar to that obtained for a weir. Vertical perforated risers are assumed to consist of a number of holes (orifices) of a given diameter distributed uniformly over the specified riser height. The orifice discharge coefficient ( $c_o$ ) is also used for computing riser flows.

Only one controlled outlet can be specified for the flood pool of a detention pond (orifice, weir, riser, or direct input of drawdown time). This is referenced as the "normal" outlet (see Figures 2 and 3). When the flood pool of a detention pond is full, the pond elevation is fixed and the "spillway" outlet is activated to pass excess overflows. In the case of a wet detention pond with no flood storage, the "normal outlet" is not used and all outflows occur through the "spillway". Users should take care to assign appropriate device numbers to each detention pond outlet. Ponds with more complex designs (multiple outlets at different elevations) can be handled by defining them as "general" devices (type=4); this requires direct entry of the elevation/area/discharge table. Such information is often available from TR-20 input or output tables.

### 5.5 Device Concentrations

Each device is assumed to be completely mixed for the purposes of computing concentrations and outflow loads. The following equations are solved:

$$\frac{dM}{dt} = W - DM$$

$$D = Q/V_m + f K_1 + f K_2 C_m + f U A_m/V_m$$

Analytical Solution:

$$M_2 = W/D + (M_1 - W/D) \exp(-D t), \quad \text{if } D > 0$$

$$= M_1 + W t, \quad \text{if } D = 0$$

where:

D = sum of first-order loss terms (1/hr)

C<sub>m</sub> = average concentration during step (ppm)

V<sub>m</sub> = average device volume during time step (ac-ft)

M<sub>1</sub>, M<sub>2</sub> = particle mass in device at start and end of time step (ac-ft\*ppm)  
t = time step length (hours)

W = total inflow load to device, from watersheds and upstream devices  
(ac-ft\*ppm/hr)

Q = average outflow from device, from flow balance (ac-ft/hr)

U = particle settling velocity (ft/hr)

A<sub>m</sub> = average device surface area during time step (acres)

K<sub>1</sub> = first-order decay coefficient (1/hr)

K<sub>2</sub> = second-order decay coefficient (1/hr-ppm)

f = particle removal scale factor, device-specific

The solution technique is similar to that used in the SWMM Transport Block (Huber & Dickinson, 1988), except it is based upon mass rather than concentration. Concentrations are computed as follows:

$$C_2 = M_2/V_2$$

$$C_m = [ W + (M_1 - M_2)/t ] \frac{1}{V_m D} \quad (\text{from mass balance})$$

where,

C<sub>2</sub> = concentration at end of time step (ppm)

V<sub>2</sub> = volume at end of time step (ac-ft)

C<sub>m</sub> = average concentration during time step, used for routing outflows to downstream devices (ppm)

If a nonzero 2nd-order decay rate ( $K_2$ ) is specified, three iterations are performed, updating the first-order loss term (D) each time based upon the average concentration ( $C_m$ ) computed in the previous iteration.

Depending upon device type, up to 15 mass-balance terms are considered in the simulations, as identified in Table 1 and Figure 3. The following mass-balance equations apply to simulations of volume and particle mass in each treatment device:

$$\text{Inflows} = \text{Outflows} + \text{Incr.-in-Storage} + \text{Removals} + \text{Continuity Error}$$

$$\text{Inflows} = \text{Watershed Disch.} + \text{Inflows from Upstream Devices}$$

$$\text{Outflows} = \text{Infiltration} + \text{Normal Outlet} + \text{Spillway}$$

$$\text{Increase-in-Storage} = \text{Final Storage} - \text{Initial Storage}$$

$$\text{Removals} = \text{Sedimentation} + \text{Decay} + \text{Filtration}$$

#### 5.6 Particle Removal Scale Factors

Using the above equations and parameter estimates discussed in the next section, the model simulates the inflow, removal, and outflow of particles in devices. Calibrated particle settling velocities are based upon settling column tests conducted using urban runoff (Driscoll, 1983; USEPA, 1986, see Section 6.1). Settling velocities may be modified in any device by adjusting the 'Particle Removal Scale Factor', which is specified on the input screen for each device type. This factor (usually = 1) modifies settling velocities and decay rates specified on particle input screens to account for device-specific characteristics.

One potentially important use of the 'Particle Removal Scale Factor' is to account for effects aquatic vegetation in detention ponds and wetlands. Theoretically, macrophytes can increase particle removal rates under a given hydraulic regime by increasing the effective surface area for settling (tray-settling concept), stabilizing bottom sediments, and/or through biological mechanisms. Design methodologies developed in Australia account for a ~5-30% increase in sediment and phosphorus removal at a given hydraulic residence time in ponds with macrophytes vs. ponds without macrophytes (Phillips & Goyen, 1987; Lawrence, 1986). Their removal efficiency curves are consistent with scale factors of 2-3 for suspended solids and 3-6 for total phosphorus attributed to macrophyte presence in wet detention ponds (Figure 6). The effect of vegetation is to shift the removal vs. residence time curves to the left, so that lower residence times (and treatment areas) are sufficient to achieve the same removal efficiency, as compared with ponds with similar hydraulic features but without macrophytes.


Alternatively, removal scale factors less than 1.0 can be assumed to account for poor hydraulic design (outlet next to inlet, promoting short-circuiting of inflows). Such adjustments would have to be made on a case-by-case basis, depending upon design characteristics and user judgement. Such designs should be avoided.




Table 1  
Mass Balance Terms

Term	Description
01 Watershed Inflows	Inflow from watersheds linked to device via surface runoff or percolation (aquifer)
02 Upstream Device	Inflow from upstream devices
03 Infiltrate	Outflow passing through bottom/sides of device through outlet # 1
04 Exfiltrate	Equals Infiltrate(03) minus Filtered(05)
05 Filtered	Mass removed during infiltration (trapped in soil)
06 Normal Outlet	Outflow passing thru outlet 2
07 Spillway	Outflow thru outlet 3, used as a "relief" when device is full
08 Sedim.+Decay	Mass removed via sedimentation and/or decay
09 Total Inflow	Sum of inflows from watershed and upstream devices
10 Surface Outflow	Sum outlets 2 and 3; also includes outlet 1, if its device number > 0
11 Groundw Outflow	Outflow thru outlet 1, if its device number = 0
12 Total Outflow	Sum of surface and groundwater outflows
13 Total Trapped	Sum of sedimentation, decay, and filtration
14 Storage Increase	Increase in storage volume (or mass)
15 Mass Bal. Check	Error term in mass-balance equation; should be small in relation to total inflows if appropriate time steps are used

**Figure 6**  
**Effects of Macrophytes on Wet Pond Removal Efficiencies**  
**(Phillips & Goyen, 1987)**

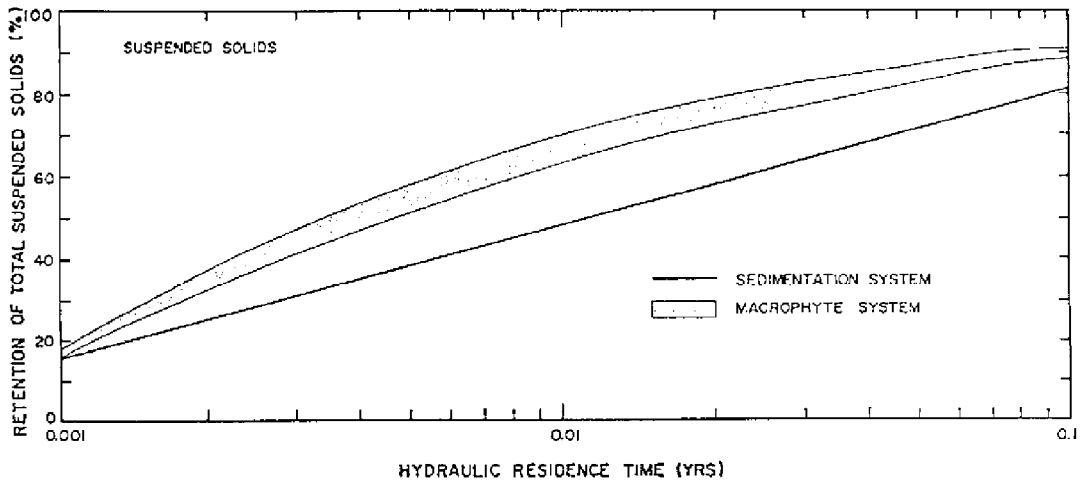

**Retention of Suspended Solids Against Hydraulic Residence Time (After Lawrence [4])**

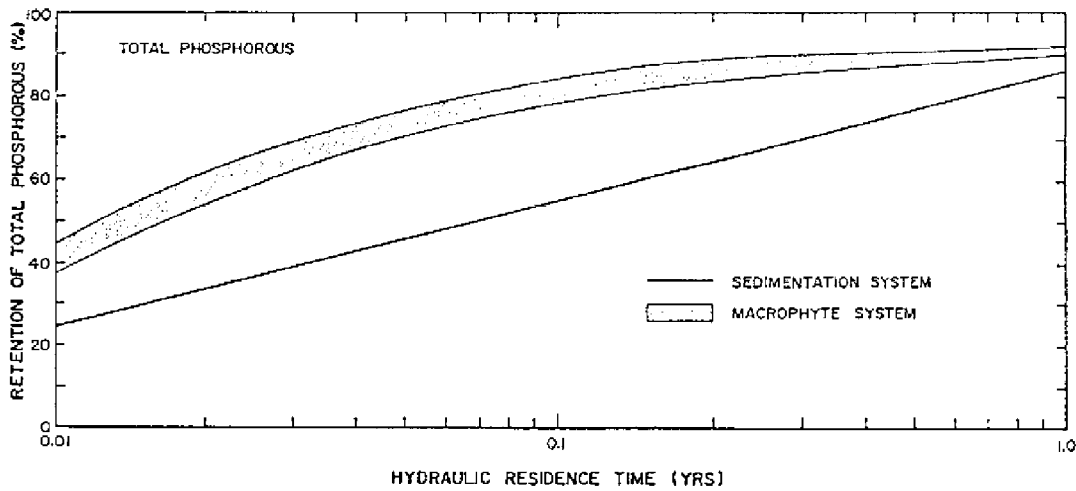

**Retention of Total Phosphorous Against Hydraulic Residence Time (After Lawrence [4])**

## 6.0 MODEL CALIBRATION

The model can be calibrated to simulate contaminants with first-order settling, first-order decay, and/or second-order decay kinetics. Several approaches are feasible. The preliminary calibrations described below are based upon NURP monitoring results for median and 90th percentile sites. These calibrations (stored in data files 'NURP50.PAR' and 'NURP90.PAR', respectively) provide initial frames of reference for users lacking site-specific runoff water quality data. Sensitivity to particle parameter values is in Section 7.2. Additional testing and refinement of the particle/water quality component calibrations are recommended for future research.

### 6.1 Particle Classes

The following particle classes are included in the particle input files distributed with the program (NURP50.PAR and NURP90.PAR), based primarily upon calibration to runoff concentrations and settling velocity distributions measured under the Nationwide Urban Runoff Program:

Class	Description	% of TSS	Settling Veloc.(ft/hr)
P0%	Dissolved	0	0
P10%	10th Percentile	20	.03
P30%	30th Percentile	20	.3
P50%	50th Percentile	20	1.5
P80%	80th Percentile	40	15

The first class permits consideration of dissolved (non-settling) fractions of runoff water quality components. The remaining classes are based upon NURP settling velocity distributions (Driscoll, 1983; USEPA, 1986). Other particle input parameters are described in Table 2.

Watershed buildup/washoff parameters have been calibrated to so that median, event-mean TSS concentrations for both pervious and impervious areas equal those reported under NURP (100 ppm for median site, 300 ppm for 90th percentile site). As a consequence of the particle buildup/washoff dynamics, the predicted flow-weighted-mean concentration of total suspended solids (used for computing annual load) is approximately equal to the median, event-mean concentration (100 ppm for median site). Athayede et al. (1983) used a flow-weighted-mean concentration of 180 ppm for computing annual loads from impervious areas. This concentration was calculated by applying a factor of 1.8 to the median, event-mean concentration. The factor accounts for the lognormal distribution of event-mean concentrations (transformation from median to arithmetic mean). The adjustment assumes that concentration is independent of runoff volume and ignores particle buildup/washoff dynamics, which typically cause decreases in mean concentration at high storm volumes ("first-flush" effect). The NURP mean TSS concentration of 180 ppm was not directly calibrated against runoff data.

The flow-weighted-mean TSS concentration of ~100 ppm predicted using the parameter values in Table 2 is consistent with values reported by Schueler (1987, p. A6) for ~19 urban watersheds in the Washington DC area with drainage areas less than 100 acres (range ~20 to ~190 ppm, average

Table 2  
Calibration of Particle Parameters

Impervious Washoff Parameters - Particle Classes P10%-P80%:

Accumulation Rates = 1.75 lbs/ac-day (P10%,P30%,P50%)  
= 3.5 lbs/ac-day (P80%)

calibrated so that sum of particle fractions yields median EMC = 100 ppm TSS), using Providence Airport 1983-1987 rainfall time series applied to impervious watershed.

Accum. Decay Rate = .25 1/day

assumes buildup on impervious surfaces reaches 90% of steady-state after 10 days of dry weather without sweeping

Washoff Exponent = 2

provides intensity-dependent washoff, as in SWMM (Huber et al., 1988)

Washoff Coefficient = 20

calibrated so that runoff load vs. storm volume relationship for impervious watersheds saturates at ~1 inch of rainfall; provides 92% washoff for a 1-inch, 8-hour storm.

Filtration Efficiency = 100%

assumes complete particle removal during infiltration in a device or pervious watershed area.

Street Sweeper Efficiencies = 4-16%

lower range of sweeper efficiencies reported by Sartor et al. (1974)

Impervious Washoff Parameters - P0%:

Impervious Runoff Conc = 1 mg/liter

arbitrary; used for calibrating dissolved fractions of water quality components

Pervious Runoff Concentrations - Particle Classes P10%-P80%:

C0 = Conc at Runoff Intensity of 1 in/hr = 100 ppm (P10%,P30%,P50%)  
= 200 ppm (P80%)

calibrated so that flow-weighted mean TSS EMC from pervious watersheds = 100 ppm (NURP median site); calibration period = 1983-1987; curve number = 74

f = Pervious Concentration/Runoff Intensity Exponent = 1

provides linear log(C) vs. log(Runoff) relationship; typical of watershed sediment rating curves (Huber & Dickinson,1988)

Pervious Runoff Concentrations - P0%:

Pervious Runoff Conc = 1 mg/liter

arbitrary; used for calibrating dissolved fractions of water quality components

~75 ppm). Users wishing to make alternative assumptions regarding TSS (or other contaminant) concentrations can do so by adjusting the appropriate values. The easiest way to adjust runoff concentrations is by using the 'scale factors' on the water quality component input screens (Appendix B, Procedure = 'CEC' = 'Case Edit Components'). For example, to assume a mean runoff TSS concentration of 180 ppm (vs. 100 ppm), assign a value of 1.8 to the TSS scale factor (particle file = NURP50.PAR). Computed particle removal efficiencies will be insensitive to such adjustments.

## 6.2 Particle Composition

Particle compositions (mg/kg) are used to translate particle concentrations into concentrations of total suspended solids, total phosphorus, total Kjeldahl nitrogen, copper, lead, zinc, and hydrocarbons. Compositions have been calibrated so that median, event-mean runoff concentrations correspond to values reported by the Nationwide Urban Runoff Program (Athayede et al., 1983), as listed in Table 3. The calibration is based upon simulation of 1983-1987 Providence Airport rainfall. A high degree of site-to-site variability is reflected by the 2- to 3-fold differences between the NURP median and 90th percentile sites. Because of this variability, specification of particle composition and prediction of runoff concentrations at a given site are subject to considerable uncertainty. Calibration of the model to local or regional runoff data may help to reduce this uncertainty.

NURP lead EMC's (.144 ppm for median site, .350 ppm for 90th percentile site) have been reduced to .02 and .05 ppm, respectively, to account for the more than ten-fold reduction in the maximum lead content of gasoline which occurred after NURP monitoring. A recent urban runoff study in Minnesota (Oberts et al., 1989) reported annual, flow-weighted-mean concentrations ranging from .004 to .027 ppm at 5 sites. Schueler (1987) reported a median, event-mean concentration of .02 ppm for urban runoff in Washington, DC.

Distribution of water quality components among particle classes is based upon results of direct runoff measurements, settling column tests, and typical pollutant removal efficiencies in treatment devices (see Section 7.1). TSS concentration is computed as the sum of the individual particle fractions. For lead and hydrocarbons, approximately 10% of the total runoff concentration is assumed to be associated with the dissolved class (P0%); the remainder is evenly distributed among the remaining particle classes. For total phosphorus, 30% of the total runoff concentration is assumed to be associated with the dissolved particle class (P0%). A dissolved fraction of 40% is assumed for total kjeldahl nitrogen, copper, and zinc. Non-dissolved portions of total phosphorus, Kjeldahl nitrogen, copper, and zinc are distributed equally among the three smallest particle classes (P10%, P30%, P50%). Soluble fractions are based partially upon results of runoff monitoring conducted under the NURP Priority Pollutant Monitoring Project (Cole et al., 1983), settling column tests (Whipple and Hunter, 1981), modelling studies by Driscoll (1983), and removal efficiencies for wet ponds (Schueler, 1987, Figure 4.6). Removal efficiencies for nutrients and heavy metals predicted with these parameter values may be conservative because chemical and biochemical

**Table 3**  
**Calibrated Runoff Concentrations**

COMPONENT	Median, Event-Mean Concentration (ppm)		
	NURP MEDIAN SITE	90th % SITE	%DISSOLVED
Total Suspended Solids	100	300	0%
Total Phosphorus	.33	.70	30%
Total Kjeldahl Nitrogen	1.50	3.30	40%
Total Copper	.034	.093	40%
Total Lead	.020 a	.050 a	10%
Total Zinc	.160	.500	40%
Hydrocarbons	2.5 b	5.0 b	10%
-----			
P8 Particle File ----->	NURP50.PAR	NURP90.PAR	
-----			

- a - NURP lead values reduced to account for >10-fold reduction in gasoline lead content since NURP monitoring.  
b - Hydrocarbons estimated from load factors reported by Hoffman et al. (1985)

**Table 4**  
**Water Quality Criteria**

COMPONENT (ppm)	LEVEL A	LEVEL B	LEVEL C
Total Sus. Solids	5	10	20
Total Phosphorus	.025	.05 d	.10 e
Total Kjeldahl N	2.0	1.0	0.5
Total Copper	2.0 a	.0048 b	.02 c
Total Lead	.02 a	.0140 b	.15 c
Total Zinc	5.0 a	.0362 b	.38 c
Total Hydrocarbons	.1	.5	1.0

- a - USEPA primary drinking water standard  
b - RI standard, acute toxicity, fresh waters, hardness = 25 ppm  
c - NURP threshold for aquatic life, intermittent exposure, soft waters (Athayede et al, 1983)  
d - USEPA (1976) guideline for eutrophication in streams  
e - USEPA (1976) guideline for streams entering lakes  
others are arbitrary benchmarks (no standards or criteria)

mechanisms responsible for removal of dissolved fractions are not considered.

A fundamentally different approach to simulating contaminant partitioning and behavior in devices would assign each contaminant to a separate particle class and use second-order decay kinetics (instead of first-order settling). The effect of second-order kinetics is to slow down the rate of removal as concentrations decrease. The same effect is achieved in the above calibration by distributing each contaminant among dissolved and particulate fractions with different settling velocities. This partitioning is artificial because size fractions and effective settling velocities are actually distributed continuously. The applicability of second-order decay kinetics has been demonstrated for hydrocarbons in NURP settling column tests (Athayede et al., 1983, Volume II), phosphorus removal in reservoirs and detention ponds (Walker, 1985, 1987), and TSS, phosphorus, and zinc removal in settling columns (author's unpublished analysis of settling column data reported by Grizzard et al., 1986). Second-order kinetics are consistent with removal mechanisms involving particle interactions (e.g., flocculation), as opposed to discrete settling. Such processes may be very important in treatment devices, as well as in receiving waters. Investigation of this modeling approach is recommended for future work.

### 6.3 Filtration Efficiency

Filtration efficiency (percent of particle class removed when water infiltrates a device or pervious watershed area) is assumed to be 100% for each suspended solids fraction (P10% - P80%). A filtration efficiency of 90% is assumed for the dissolved fraction (P0%), to account for adsorption, precipitation, and other reactions between dissolved runoff contaminants and the soil matrix. Such reactions are responsible for the generally low concentrations of phosphorus and heavy metals found in groundwaters beneath runoff swales and retention basins (Wigington et al., 1986; Youseff et al., 1986; Nightingale, 1987ab, Schiffer, 1988). The effects of assuming alternative values for filtration efficiency can be easily investigated by editing the filtration efficiency contained on the particle input screen ('CEP' = 'Case Edit Particles').

With these parameter values, the predicted total phosphorus concentrations in groundwater is ~.01 ppm (median runoff total P = .33 ppm, 30% dissolved, 90% removal of dissolved fraction upon infiltration), which is typical of this region. Predicted average streamflow total phosphorus concentrations (baseflow + runoff) range from .014 to .15 ppm for impervious fractions ranging from 0% to 25%. This range is similar to that derived from regression analysis of average stream phosphorus concentrations in 116 Northeastern watersheds sampled by the EPA National Eutrophication Survey (Walker, 1978, 1982).

### 6.4 Water Quality Criteria

Water quality criteria included in the particle/component files NURP50.PAR and NURP90.PAR are listed in Table 4. The 'LV' (= 'List Violations') procedure compares these values with the distribution of event-mean concentrations for any device and mass-balance stream. Output

summarizes the percent of events in which the event-mean concentration exceeds each of three criteria specified for each water quality component. Criteria can be modified via the 'CEC' (= 'Case Edit Components') procedure (ADVANCED USER MODE only). The concept of using violation frequencies for evaluating urban runoff impacts is discussed in the NURP final report (Athayede et al., 1983). The lack of criteria which are realistic for urban runoff situations (Mancini and Plummer, 1986) limits the interpretation of violation frequencies and the extent to which they can be properly used in the context of site planning, design, or impact assessments. Predictions violation frequency are also uncertain because of high site-to-site variations in runoff quality.

## 7.0 MODEL TESTING

### 7.1 Device Performance

As stated in the introduction, the program is intended primarily for use in evaluating compliance with a treatment goal expressed in terms of percentage removal for total suspended solids or a single particle class. One method for testing the model is to compare predicted removal efficiencies with predictions based upon other theoretical or empirical models which have been tested against observed performance data (Driscoll, 1983; USEPA, 1986; Schueler, 1987; Walker, 1987).

Figures 7 and 8 compare simulated volume capture efficiencies for infiltration basins with predictions of a probabilistic model developed by Driscoll (USEPA, 1986). The curves relate volume capture efficiency to ratio of basin area to watershed area for different regions, basin mean depths, and infiltration rates. The simulations are based upon Providence 1983-1987 rainfall. Since Driscoll's methodology assumes a fixed runoff coefficient, runoff from pervious areas is not included in the P8 simulations. Figure 8 is based upon typical precipitation patterns for the Great Lakes area. The Providence rainfall time series has been adjusted to give the same mean storm volume and intensity used in the Driscoll's simulations. Symbols on the lower graph in each figure show Driscoll's predictions (extracted from upper graph) in relation to P8 predictions. Agreement between the two methodologies for predicting volume capture in infiltration basins is good.


Figure 9 compares simulated suspended solids removal efficiencies for wet detention ponds with Driscoll's (1983; USEPA, 1986) results. The curves relate removal efficiency to the ratio of basin area to watershed area for different regions of the country. To permit comparison of model results for equivalent watershed dynamics, constant runoff coefficients and constant runoff concentrations have been used in the P8 simulations. Supplementary testing indicates that predicted removal efficiencies are insensitive to washoff dynamics. The settling velocity used in the simulations is equivalent to that developed by Driscoll (1983), based upon NURP data. Predicted removal efficiencies in each particle class are shown in Figure 10.

Figure 9 shows that while the methodologies agree on the average, P8 over-predicts Driscoll's results at low  $A_b/A_w$  and under-predicts Driscoll's results at high  $A_b/A_w$  ratios. As noted by Driscoll (1983), particle



Figure 7  
Comparison of Predicted Volume Capture Efficiencies

Probabilistic Method (Driscoll, 1983; USEPA, 1986):

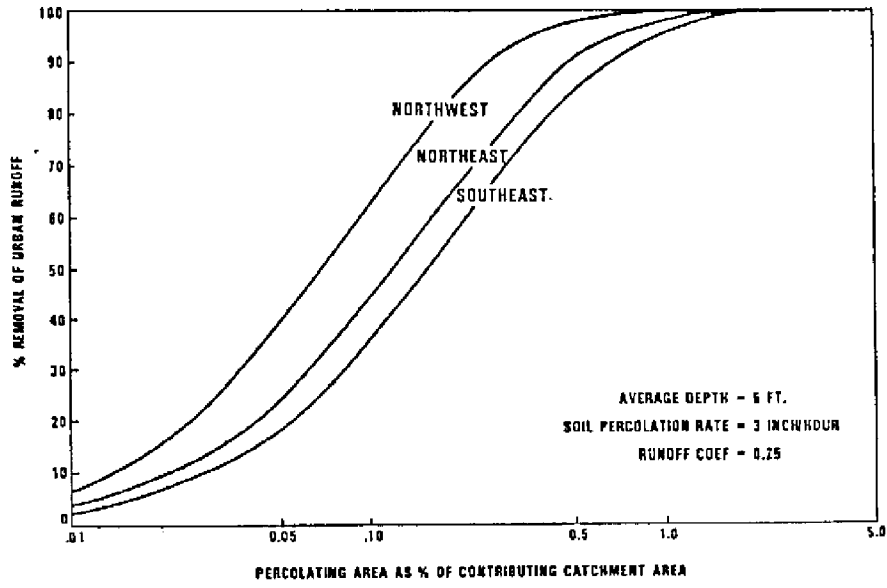

P8 Simulation of 1983-1987 Providence Rainfall:


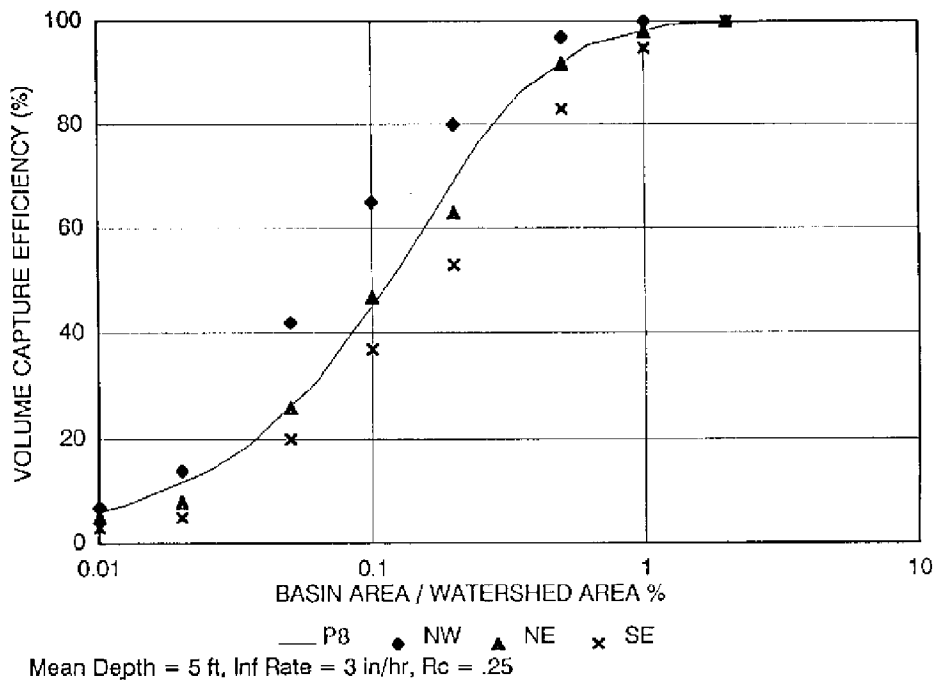


Figure 8  
 Comparison of Predicted Volume Capture Efficiencies  
 Great Lakes Precipitation Sequence

Probabilistic Method (Driscoll, 1983; USEPA, 1986):

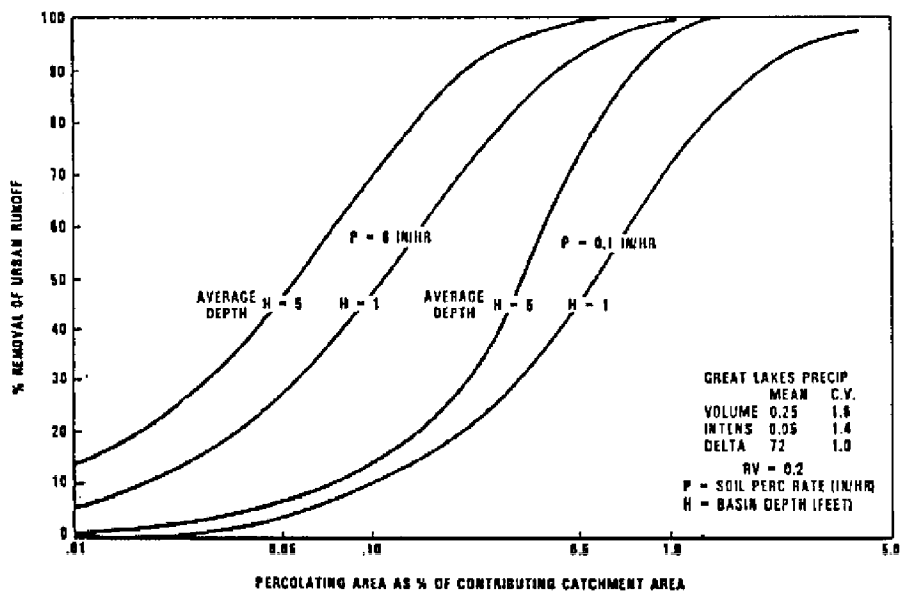

P8 Simulation of 1983-1987 Providence Rainfall, Adjusted to Great Lakes Mean Storm Volume and Intensity:


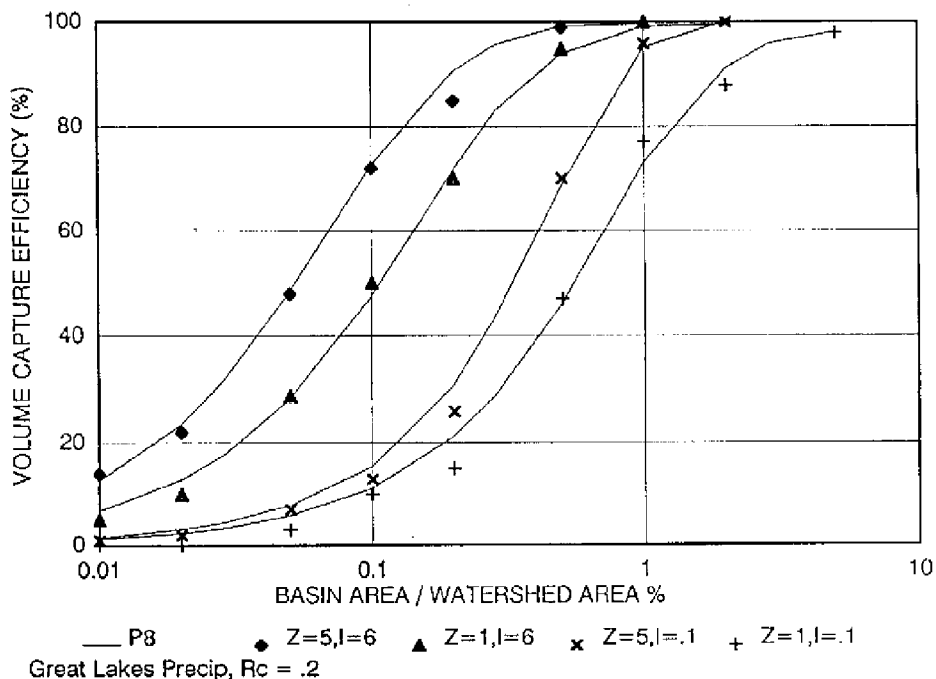


Figure 9  
Comparison of Predicted Suspended Solids Removal Efficiencies  
for Wet Detention Ponds

Probabilistic Method (Driscoll, 1983; USEPA, 1986):

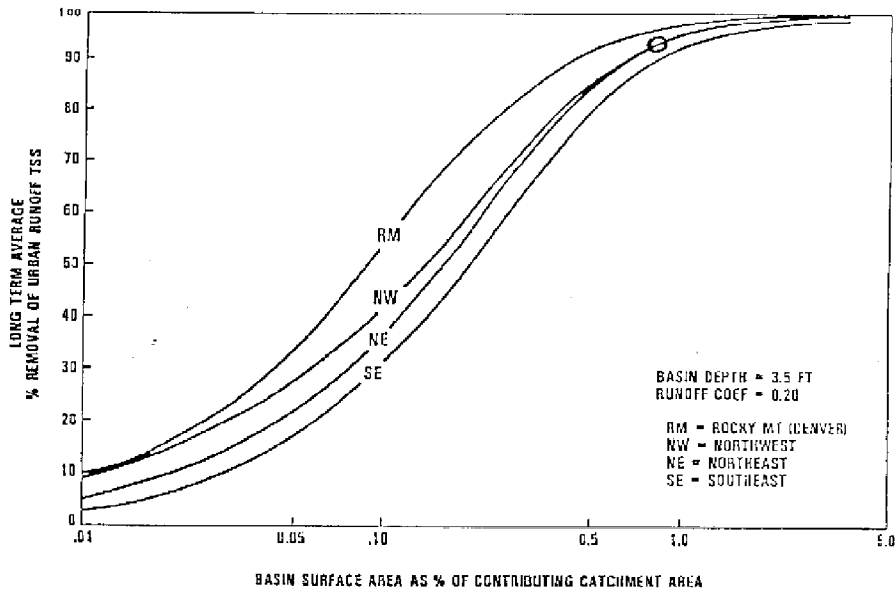

P8 Simulation of 1983-1987 Providence Rainfall:



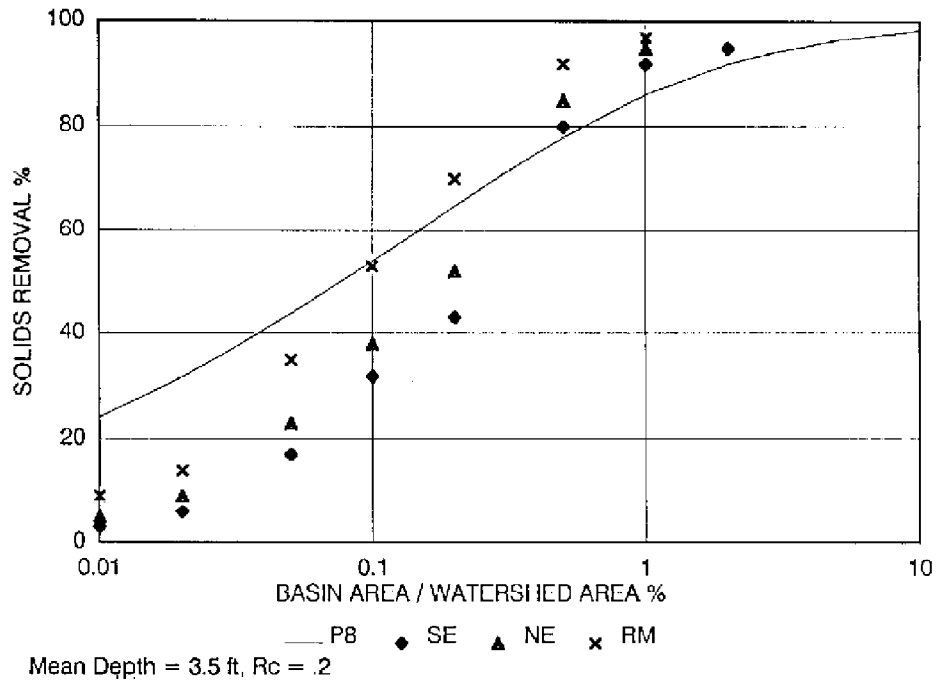


Figure 10  
 Predicted Suspended Solids Removal Efficiencies vs. Particle Class

P8 Simulation of 1983-1987 Providence Rainfall

Driscoll (1983) Settling Velocity Distribution:

Particle Class:	P10%	P30%	P50%	P70%	P90%
Settling Veloc. (ft/hr):	.03	.3	1.5	7	65

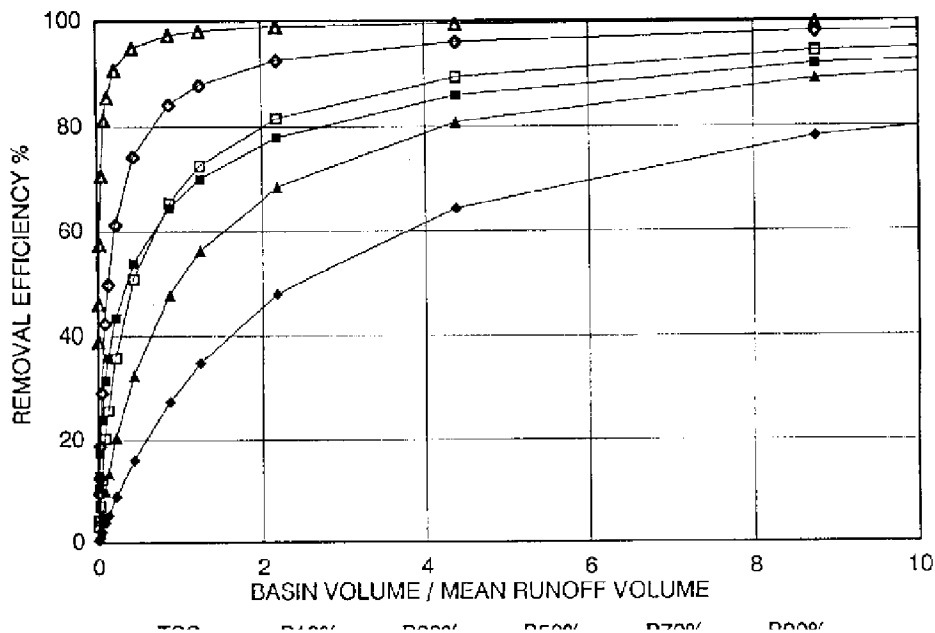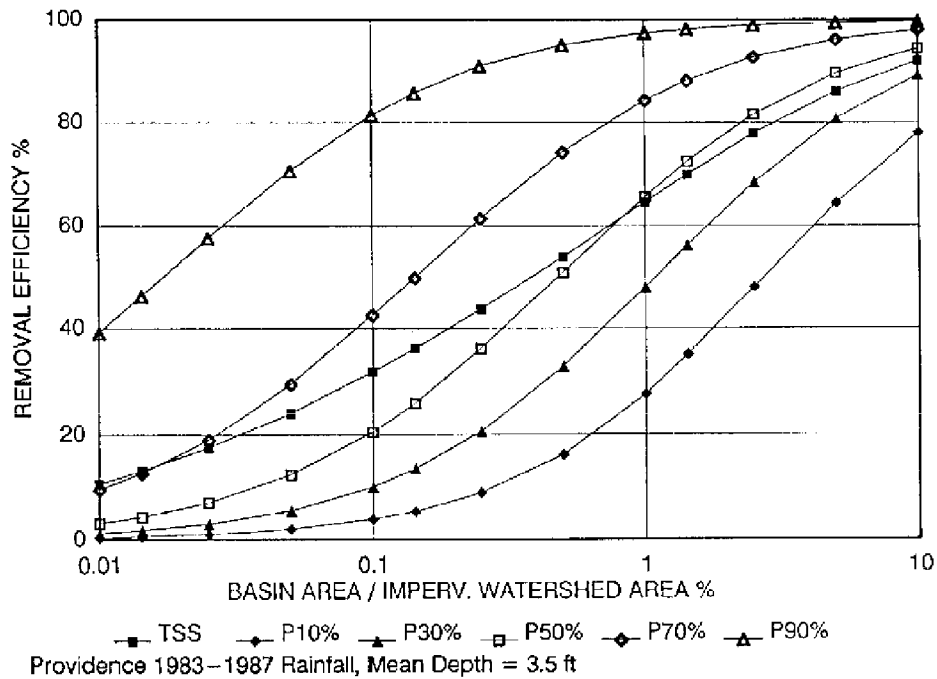

removal under dynamic conditions occurs when the settling velocity exceeds the basin overflow rate (ft/hr). The average basin overflow rate (outflow per unit area) can be estimated as follows:

$$Q_s = A_w r I / 12 A_b$$

where,

$Q_s$  = average overflow rate (ft/hr)

$A_b$  = basin surface area (acres)

$A_w$  = watershed area (ac-ft)

$r$  = watershed runoff coefficient

$I$  = mean storm intensity (in/hr) ~.06 in/hr

For the lowest area ratio shown in Figure 9 (.01 %), the above expression evaluates to 10 ft/hr, much less than the settling velocity of the largest particle fraction (65 ft/hr), which is assumed to account for 20% of the total suspended solids. When removal under quiescent conditions is also considered, TSS removals in excess of 20% would be expected for  $A_b/A_w = .01\%$ , yet Driscoll's method predicts removals less than 10% (~5% for NE rainfall).

At high  $A_b/A_w$  ratios, P8 under-predicts Driscoll's results by 5-10%. Driscoll (1983) compared measured TSS removal efficiencies for NURP basins with predictions of his model. In a total of four cases, predicted removal efficiencies exceeded 90%. In each of these cases, however, observed removals were ~6 to ~30% lower than model predictions. The fact that P8 under-predicts results of Driscoll's model at high removal efficiencies is consistent with observed performance data.

Walker (1987) showed that an empirical model originally developed for predicting phosphorus retention in reservoirs (Walker, 1985) could be used to predict phosphorus removal in urban runoff detention basins. Figure 11 compares phosphorus removal efficiencies computed by P8 with predictions of the empirical model, based upon Providence 1983-1987 rainfall. Saturation at high  $A_b/A_w$  ratios reflects assignment of 30% of the runoff total phosphorus to the conservative particle class (P0%). Results are in good agreement.

The above comparisons indicate that P8 predictions of removal efficiency in infiltration basins and wet detention ponds are in reasonable agreement with predictions derived from other models. Additional testing of the model and refinement of the preliminary calibration using regional monitoring data are recommended for future work.

## 7.2 Sensitivity Analysis

Specification of model input values defining watershed, device, particle, and storm characteristics is based partially upon direct


**Figure 11**  
**Comparison of Predicted Phosphorus Removal Efficiencies**

**P8 Predictions:**

TSS and TP  
Simulation of 1983-1987 Providence Rainfall  
Basin Mean Depth = 3.5 feet

**Empirical Model:**

Walker (1987)  
Developed from Input/Output Data from Corps of Engineer Reservoirs  
Model Tested Against Data from 24 Runoff Detention Basins  
Prediction Assumes NURP Median Runoff Total P Conc = .33 mg/l  
and Providence Rainfall Statistics  
Approximate Confidence Limits for Empirical Model Shown

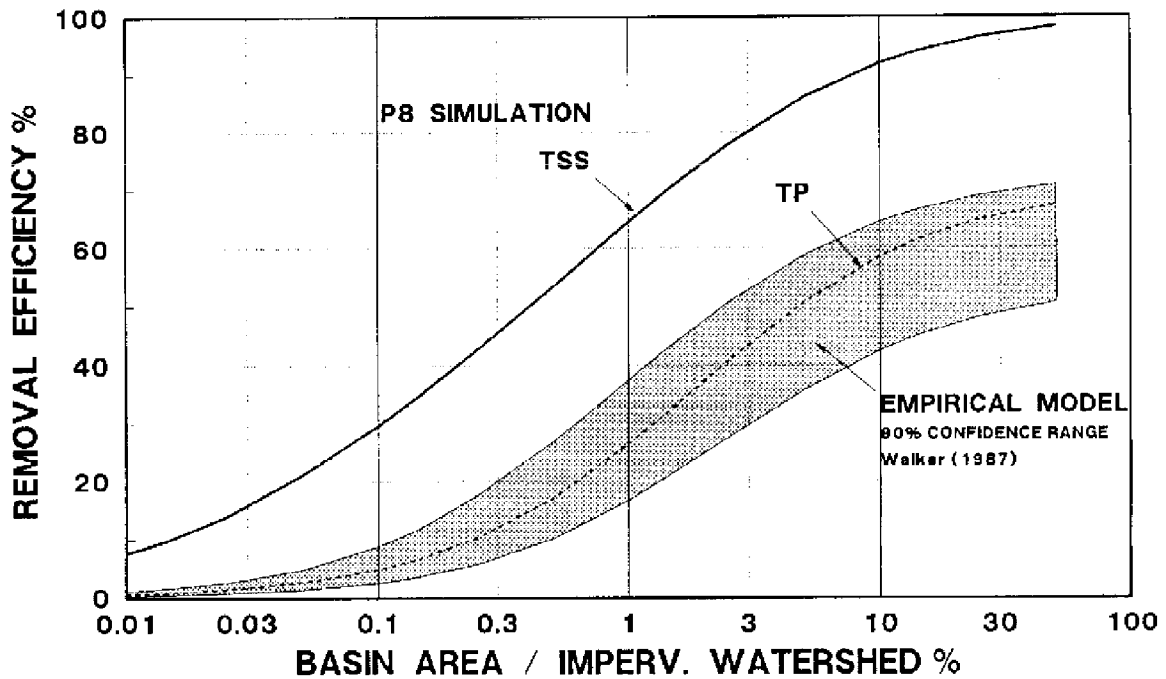

Providence 1983-1987 Rainfall, Mean Depth = 3.5 ft, Runoff Total P = .33 ppm

measurement, estimation, and the generalized calibrations discussed above. The sensitivity analysis procedure ('Run Sensitivity') provides insights into which input values have the greatest impact on computed removal efficiencies and outflow concentrations. This, in turn, helps to prioritize inputs (and their inherent assumptions) with respect to their importance. This procedure is demonstrated below for six device types (pipe, wet pond, dry pond, extended pond, infiltration basin, and buffer strip/swale) with identical watershed characteristics.

Using the 'Run Design Tune' procedure, each device was originally sized to achieve 70% TSS removal for a 1-inch, 24-hour, Type-2 storm with 75-hour period between storm midpoints (storm file = 'TYPE2.STM'). Device and watershed characteristics are given in Table 5. Input values are stored in the file 'SENSIT.CAS' on the program distribution disk. Simulations were then run using Providence rainfall time series for 1984 through 1986. Results from the 'Run Sensitivity' procedure are shown in Table 6. Each input variable was increased by 25% (one at a time) and impacts on TSS removal efficiency and flow-weighted-mean outflow concentration were tabulated. Note that this type of calculation is time consuming (~4 hours on an 80386/80387/20 mhz machine) because the entire 3-year simulation is repeated 38 times (once for each model input variable).

Input variables are grouped in four categories: watershed, device, particle, and storm. In typical applications, the first two groups are specified by the model user and the last two groups are specified in the default particle file ('NURP50.PAR') and storm data files. The following points are based upon review of sensitivity analysis results in Table 6:

- (1) Removal efficiencies are much less sensitive to variations in input values than are outflow concentrations. For example, changes in wet pond removal efficiencies range from -5.7% to +1.7% for a 25% increase in input values. Corresponding changes in outflow concentrations range from -14.5% to +25%. This reflects the fact that variations in factors determining runoff (inflow) concentrations are "canceled out" in computing removal efficiencies. As discussed in Section 1.2, removal efficiencies ("relative predictions") are expected to be more accurate than outflow concentrations or loads ("absolute predictions").
- (2) The 'washoff exponent' for impervious surfaces has a high sensitivity ranking for removal efficiencies. Reductions in removal efficiency resulting from a 25% increase in this parameter range from 2.7% to 6.6% for the various devices (exclusive of 'pipe'). Sensitivity reflects the fact that this parameter is an exponent (rather than a coefficient or linear term). The value selected for this parameter (2.0) provides intensity-dependent washoff, as included as an option in the most recent version of SWMM (Huber and Dickinson, 1988). Early versions of SWIM and other models (e.g., STORM) assumed a washoff exponent of 1. The effect of a higher washoff exponent is to attribute a higher portion of the annual washoff load to intense storms, when device residence times and particle removal efficiencies tend to be lower. In essence, use of a higher

**Table 5**  
**Input Values for Sensitivity Analysis**

**Note:** Each device sized to remove 70% TSS for TYPE2.SIM

**WATERSHED INPUTS (identical for each device):**

watershed area	acres	=	100.000
impervious fraction		=	.250
impervious depression storage	inches	=	.020
scs curve number (pervious portion)		=	74.000
sweeping frequency	times/week	=	.000
water quality load factor	-	=	1.000

**DEVICE INPUTS - PIPE:**

time of concentration = 2.000 hours

**DEVICE INPUTS - WET POND:**

bottom area	acres	=	.269
permanent pool area	acres	=	.538
permanent pool volume	ac-ft	=	1.614
flood pool area	acres	=	.807
flood pool volume	ac-ft	=	3.228
flood pool drain time	hours	=	6.000
flood pool infiltr. rate	in/hr	=	.500

**DEVICE INPUTS - DRY POND:**

bottom area	acres	=	1.310
permanent pool area	acres	=	0.000
permanent pool volume	ac-ft	=	0.000
flood pool area	acres	=	3.930
flood pool volume	ac-ft	=	23.583
flood pool drain time	hours	=	6.000

**DEVICE INPUTS - EXTENDED DETENTION POND:**

bottom area	acres	=	.483
permanent pool area	acres	=	.000
permanent pool volume	ac-ft	=	.000
flood pool area	acres	=	1.448
flood pool volume	ac-ft	=	8.686
flood pool drain time	hours	=	24.000

**DEVICE INPUTS - INFILTRATION BASIN:**

bottom area	acres	=	.182
storage pool area	acres	=	.364
storage pool volume	ac-ft	=	1.092
infiltration rate	in/hr	=	.500
void volume	%	=	100.000

**DEVICE INPUTS - BUFFER/SWALE:**

length of flow path	feet	=	471.223
slope of flow path	%	=	2.000
bottom width	feet	=	100.000
side slope	ft-h/ft-v	=	10.000
maximum flow depth	feet	=	.500
infiltration rate	in/hr	=	.500
mannings n	-	=	.400

**PARTICLE/WATER QUALITY COMPONENT INPUTS :**

see 'NURP50.PAR'



**Table 6**  
**Sensitivity Analysis Results**

Notes: Effects of increasing each input variable by 25% are tabulated  
 Storm sequence = Providence 1984-1986; Input values given in Table 5  
 T = input variable type (w = watershed, d = device, p = particle, s = storm)  
 SENS = sensitivity coefficient = % increase in Y / % increase in X (Walker, 1982)

**DEVICE = PIPE**

T INPUT VARIABLE	PERCENT				OUTFLOW			
	REMOVAL	CHANGE	ICH	SENS	CONC	CHANGE	ICH	SENS
original run -->	.00				110.9052			
w watershed area	.00	.00	.00	.000	110.9156	.0104	.01	.000
w imperv fraction	.00	.00	.00	.000	110.1926	-.7126	-.64	-.026
w depression stor	.00	.00	.00	.000	111.3883	.4831	.44	.017
w curve number	.00	.00	.00	.000	112.8956	1.9904	1.79	.072
w wtshd load fac	.00	.00	.00	.000	138.6315	27.7263	25.00	1.000
d time of conc	.00	.00	.00	.000	110.8607	-.0444	-.04	-.002
p accumulation rat	.00	.00	.00	.000	135.0334	24.1282	21.76	.870
p accum decay	.00	.00	.00	.000	96.7259	-14.1792	-12.79	-.511
p washoff coeff	.00	.00	.00	.000	116.3339	5.4287	4.89	.196
p washoff expon	.00	.00	.00	.000	64.9189	-25.9863	-23.43	-.937
p perv runoff c	.00	.00	.00	.000	114.5033	3.5981	3.24	.130
s storm volume fac	.00	.00	.00	.000	106.2643	-4.6409	-4.18	-.167
s storm duration f	.00	.00	.00	.000	101.4222	-9.4830	-8.55	-.342

**DEVICE = WET POND**

T INPUT VARIABLE	PERCENT				OUTFLOW			
	REMOVAL	CHANGE	ICH	SENS	CONC	CHANGE	ICH	SENS
original run -->	72.65				30.3631			
w watershed area	69.75	-2.90	-3.99	-.160	33.5834	3.2203	10.61	.424
w imperv fraction	71.04	-1.61	-2.22	-.089	31.9484	1.5852	5.22	.209
w depression stor	72.62	-.04	-.05	-.002	30.5354	.1723	.57	.023
w curve number	70.99	-1.66	-2.28	-.091	32.7828	2.4196	7.97	.319
w wtshd load fac	72.65	.00	.00	.000	37.9539	7.5908	25.00	1.000
d bottom area	72.65	.00	.00	.000	30.3629	-.0002	.00	.000
d perm pool area	73.93	1.28	1.76	.070	28.9449	-1.4183	-4.67	-.187
d perm pool volume	73.81	1.16	1.60	.064	29.0679	-1.2952	-4.27	-.171
d flood pool area	73.24	.59	.81	.032	29.7105	-.6526	-2.15	-.086
d flood pool vol	72.55	-.10	-.14	-.005	30.4730	.1099	.36	.014
d drawdown time	73.10	.45	.62	.025	29.8664	-.4967	-1.64	-.065
d infilt rate	72.68	.03	.04	.002	30.3301	-.0330	-.11	-.004
p accumulation rat	73.35	.70	.97	.039	36.0211	5.6580	18.63	.745
p accum decay	72.07	-.58	-.80	-.032	27.0404	-3.3227	-10.94	-.438
p washoff coeff	73.19	.54	.74	.030	31.2235	.8604	2.83	.113
p washoff expon	69.45	-3.20	-4.40	-.176	25.9618	-4.4014	-14.50	-.580
p perv runoff c	71.83	-.83	-1.14	-.046	32.2959	1.9328	6.37	.255
p settling veloc	74.39	1.74	2.39	.096	28.4378	-1.9254	-6.34	-.254
p filtration effc	72.69	.03	.04	.002	30.3270	-.0361	-.12	-.005
s storm volume fac	66.95	-5.70	-7.85	-.314	35.1560	4.7929	15.79	.631
s storm duration f	73.57	.91	1.26	.050	28.8351	-3.5280	-11.62	-.465

**DEVICE = DRY POND**

T INPUT VARIABLE	PERCENT				OUTFLOW			
	REMOVAL	CHANGE	ICH	SENS	CONC	CHANGE	ICH	SENS
original run -->	72.64				30.3795			
w watershed area	70.61	-2.03	-2.80	-.112	32.6384	2.2588	7.44	.297
w imperv fraction	71.43	-1.21	-1.67	-.067	31.5186	1.1391	3.75	.150
w depression stor	72.58	-.06	-.09	-.003	30.5818	.2022	.67	.027
w curve number	71.54	-1.11	-1.52	-.061	32.1734	1.7938	5.90	.236
w wtshd load fac	72.64	.00	.00	.000	37.9744	7.5949	25.00	1.000
d bottom area	74.62	1.98	2.73	.109	28.1781	-2.2014	-7.25	-.290
d flood pool area	72.90	.26	.36	.014	30.0886	-.2910	-.96	-.038
d flood pool vol	72.47	-.17	-.23	-.009	30.5683	.1887	.62	.025
d drawdown time	73.52	.88	1.21	.048	29.4057	-.9738	-3.21	-.128
p accumulation rat	73.14	.50	.69	.028	36.3081	5.9286	19.51	.781
p accum decay	72.20	-.44	-.61	-.024	28.9254	-3.4542	-11.37	-.455
p washoff coeff	73.30	.66	.90	.036	31.1032	.7237	2.38	.095
p washoff expon	69.13	-3.51	-4.83	-.193	26.2435	-4.1360	-13.61	-.545
p perv runoff c	72.05	-.59	-.82	-.033	32.0459	1.6663	5.49	.219
p settling veloc	74.68	2.04	2.81	.112	28.1170	-2.2626	-7.45	-.298
s storm volume fac	69.29	-3.35	-4.61	-.184	32.6620	2.2824	7.51	.301
s storm duration f	73.73	1.08	1.49	.060	26.6787	-3.7008	-12.18	-.487

(ct.)

Sensitivity Analysis Results (ct)

DEVICE = EXTENDED DETENTION POND

I INPUT VARIABLE	PERCENT				OUTFLOW			
	REMOVAL	CHANGE	ZCH	SENS	CONC	CHANGE	ZCH	SENS
original run -->	71.48				31.7144			
w watershed area	69.64	-1.83	-2.56	-.102	33.7506	2.0362	6.42	.257
w imperv fraction	70.53	-.95	-1.32	-.053	32.5484	.8340	2.63	.105
w depression stor	71.43	-.04	-.06	-.002	31.8999	.1854	.58	.023
w curve number	70.55	-.93	-1.30	-.052	33.3577	1.6433	5.18	.207
w wtshd load fac	71.48	.00	.00	.000	39.6430	7.9286	25.00	1.000
d bottom area	72.97	1.49	2.09	.084	30.0534	-1.6611	-5.24	-.210
d flood pool area	72.29	.82	1.14	.046	30.8072	-.9072	-2.86	-.114
d flood pool vol	70.96	-.52	-.72	-.029	32.2879	.5735	1.81	.072
d drawdown time	72.91	1.43	2.01	.080	30.1208	-1.5936	-5.02	-.201
p accumulation rat	71.89	.41	.58	.023	38.0058	6.2913	19.84	.793
p accum decay	71.11	-.36	-.51	-.020	28.0422	-3.6722	-11.58	-.463
p washoff coeff	72.00	.53	.74	.030	32.6404	.9260	2.92	.117
p washoff expon	68.82	-2.65	-3.71	-.149	26.5977	-5.1167	-16.13	-.645
p perv runoff c	70.99	-.49	-.68	-.027	33.3517	1.6373	5.16	.207
p settling veloc	73.57	2.09	2.93	.117	29.3879	-2.3265	-7.34	-.293
s storm volume fac	68.31	-3.17	-4.43	-.177	33.8773	2.1629	6.82	.273
s storm duration f	71.97	.50	.69	.028	28.4685	-3.2459	-10.23	-.409

DEVICE = INFILTRATION BASIN

I INPUT VARIABLE	PERCENT				OUTFLOW			
	REMOVAL	CHANGE	ZCH	SENS	CONC	CHANGE	ZCH	SENS
original run -->	78.74				23.6115			
w watershed area	73.26	-5.48	-6.96	-.278	29.6931	6.0816	25.76	1.030
w imperv fraction	75.18	-3.55	-4.51	-.181	27.3786	3.7671	15.95	.638
w depression stor	78.73	-.01	-.01	-.000	23.7222	.1107	.47	.019
w curve number	75.96	-2.78	-3.53	-.141	27.1716	3.5601	15.08	.603
w wtshd load fac	78.74	.00	.00	.000	29.5144	5.9029	25.00	1.000
d bottom area	79.03	.29	.37	.015	23.2875	-.3240	-1.37	-.055
d flood pool area	80.51	1.77	2.25	.090	21.6407	-1.9708	-8.35	-.334
d flood pool vol	81.55	2.82	3.58	.143	20.4846	-3.1269	-13.24	-.530
d infilt rate	79.68	.94	1.20	.048	22.5651	-1.0464	-4.43	-.177
p accumulation rat	79.96	1.22	1.55	.062	27.0977	3.4862	14.76	.591
p accum decay	77.65	-1.09	-1.38	-.055	21.6457	-1.9658	-8.33	-.333
p washoff coeff	79.94	1.20	1.53	.061	23.3688	-.2427	-1.03	-.041
p washoff expon	72.17	-6.57	-8.34	-.334	23.6596	.0481	.20	.008
p perv runoff c	77.30	-1.44	-1.83	-.073	26.0282	2.4167	10.24	.409
p settling veloc	79.81	1.08	1.37	.055	22.4165	-1.1950	-5.06	-.202
p filtration effie	80.98	2.24	2.85	.114	21.1237	-2.4878	-10.54	-.421
s storm volume fac	69.45	-9.29	-11.80	-.472	32.4997	8.8882	37.64	1.506
s storm duration f	79.72	.99	1.25	.050	20.5904	-3.0211	-12.80	-.512

DEVICE = BUFFER STRIP / SWALE

I INPUT VARIABLE	PERCENT				OUTFLOW			
	REMOVAL	CHANGE	ZCH	SENS	CONC	CHANGE	ZCH	SENS
original run -->	73.84				29.0381			
w watershed area	70.71	-3.14	-4.25	-.170	32.5221	3.4840	12.00	.480
w imperv fraction	72.02	-1.82	-2.47	-.099	30.8630	1.8249	6.28	.251
w depression stor	73.76	-.08	-.11	-.005	29.2573	.2192	.75	.030
w curve number	72.02	-1.82	-2.46	-.099	31.6140	2.5759	8.87	.355
w wtshd load fac	73.84	.00	.00	.000	36.2976	7.2595	25.00	1.000
d infilt rate	75.07	1.23	1.66	.066	27.6703	-1.3678	-4.71	-.188
d buffer length	77.58	3.74	5.07	.203	24.8827	-4.1554	-14.31	-.572
d buffer width	76.89	3.05	4.13	.165	25.6488	-3.3893	-11.67	-.467
d buf side slope	73.97	.13	.18	.007	28.8946	-.1435	-.49	-.020
d mannings n	74.44	.60	.81	.032	28.3755	-.6626	-2.28	-.091
d buffer slope	73.56	-.28	-.38	-.015	29.3497	.3116	1.07	.043
d buffer max depth	73.91	.07	.09	.004	28.9657	-.0724	-.25	-.010
p accumulation rat	74.63	.78	1.06	.042	34.2967	5.2586	18.11	.724
p accum decay	73.15	-.69	-.94	-.037	25.9953	-3.0428	-10.48	-.419
p washoff coeff	74.84	.99	1.35	.054	29.3024	.2643	.91	.036
p washoff expon	68.38	-5.46	-7.40	-.296	26.8795	-2.1586	-7.43	-.297
p perv runoff c	72.92	-.92	-1.25	-.050	31.0391	2.0009	6.89	.276
p settling veloc	75.52	1.68	2.28	.091	27.1721	-1.8660	-6.43	-.257
p filtration effie	75.30	1.46	1.98	.079	27.4178	-1.6203	-5.58	-.223
s storm volume fac	68.44	-5.40	-7.32	-.293	33.5670	4.5298	15.60	.624
s storm duration f	75.99	2.15	2.91	.116	24.3719	-4.6662	-16.07	-.643

washoff exponent (2 vs. 1) decreases the importance of first-flush responses over long storm time series. This will cause conservative estimation of particle removal efficiencies below watersheds which have strong first-flush responses.

- (3) Changes in removal efficiency resulting from a 25% increase in particle settling velocities range from +1.7% to +2.4%. Although settling velocity ranks high in relation to other input values, the degree of sensitivity is low.
- (4) Removal efficiencies are more sensitive to storm volume (-3.1% to -9.3%) than to storm duration (+.5% to +2.2%). This reflects the fact that removals are more dependent upon the total runoff volume (e.g., "quiescent removal",  $V_b/V_r$  relationships) than to overflow rate during storm periods ("dynamic conditions", Driscoll, 1983). Because it has the lowest effective storage volume, the swale/buffer has the highest sensitivity to storm duration (2.2% increase removal efficiency for a 25% increase in storm duration). The low sensitivity to storm duration (or intensity) means that removal efficiencies will be insensitive to errors in predicting the temporal distribution of runoff flows and loads within storm events (e.g., time of concentration, watershed lag).

### 7.3 Watershed-Scale Application

This section describes calibration and testing of the model against measured streamflows in the Hunt-Potowomut watershed. Watershed characteristics derived from GIS data bases are summarized in Table 7. Segmentation of the model to predict surface runoff and baseflow at the mouth of the watershed is illustrated in Figure 12. An 'AQUIFER' device is used to simulate baseflow and a 'PIPE' is used to collect surface runoff. Outflows from these devices are routed to a second 'PIPE' for prediction of total streamflow. The model has been calibrated against streamflows measured by the USGS (Gauge 01117000) for Water Years 1981-1983 and tested against data for Water Years 1984-1986.

Calibration involves adjusting times of concentration for baseflow and surface runoff to match observed peak flows over various averaging intervals. Observations and predictions are compared using the 'RC' (= 'Run Calibrate') procedure, as illustrated in Figure 13. The baseflow time of concentration (700 hours or ~ 30 days) has been calibrated against the measured 30-day-moving-average peak flow for Water Years 1981-1983 (~230 cfs, April 1983). The 30-day-moving average is used for baseflow calibration because it is insensitive to runoff time of concentration (much shorter than 30 days). The surface runoff time of concentration (70 hours) has been calibrated against the instantaneous peak flow observed on April 11, 1983 at 4:30 am (968 cfs). As shown in Figure 14, the model accurately predicts both the magnitude and the time of this peak with the calibrated times of concentration.

Results of model testing against measured daily streamflows for Water Years 1984-1986 are shown in Figures 15 and 16. Observed and predicted monthly total flows (expressed in inches over entire watershed) for the

Table 7  
Input Values for Hunt-Potowomut Watershed

Watershed	Total Area acres	Imperv. Fraction	Dominant Soil Grp	Perv. Curve No.
Mauny Frenchtown	4486.6	0.049	B	58
Fry Brook	1986.8	0.093	B	58
Sandhill River	2351.2	0.126	A	32
Hunt River	2621.5	0.140	A	32
Unnamed - 2	918.1	0.015	B	58
Scrabbletown	1727.6	0.055	A/B	45
Unnamed - 1	603.6	0.210	A/B	45
Total	14695.4	0.089		

Figure 12

P8 APPLICATION TO HUNT-POTOWOMUT WATERSHED


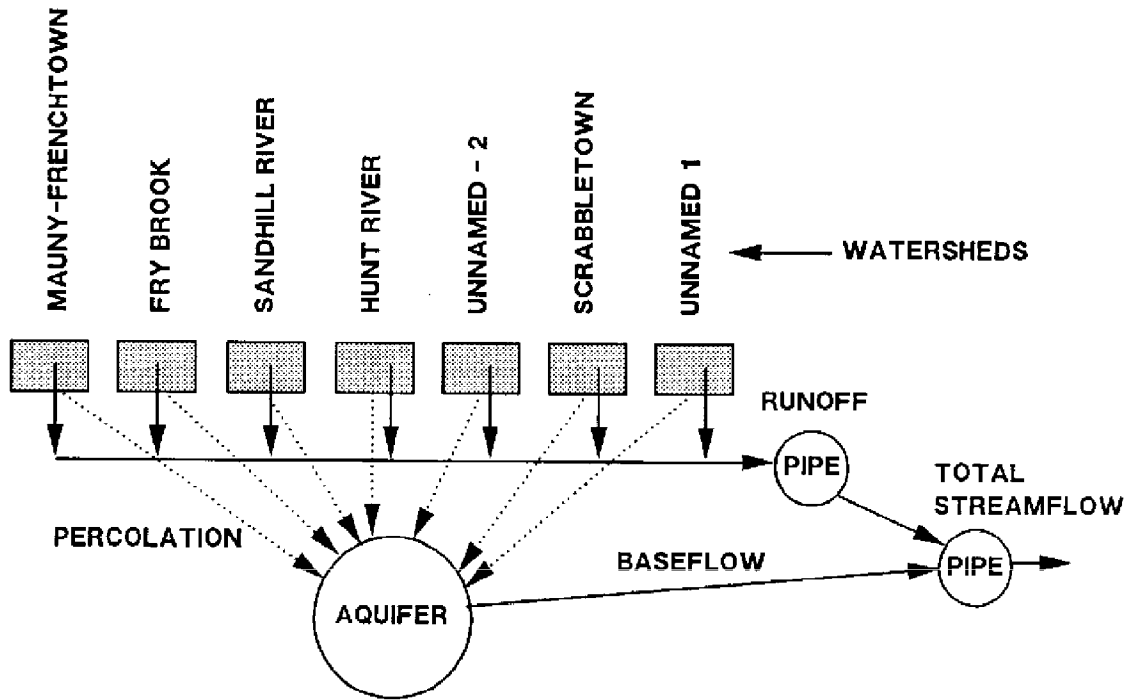


Figure 13  
Predicted and Observed Flows - Hunt-Potowomut River  
Calibration Period - Water Years 1981-1983


X-Axis = Julian Days from 12/31/80  
Y-Axis = Streamflow (cfs)

PREDICTED - WY 1984-1986  
DAILY FLOWS

$R^2 = .79$   
SE = 31.1

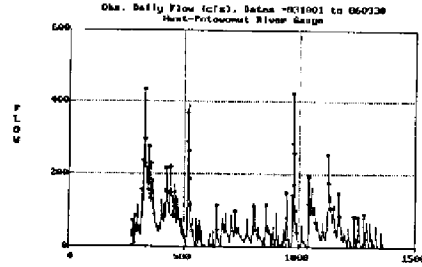


OBSERVED - WY 1984-1986

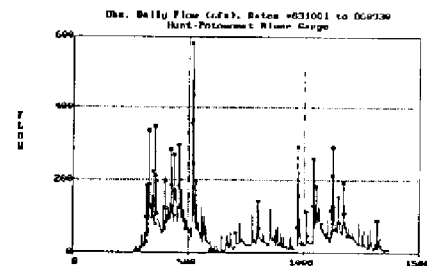


7-DAY MOVING AVERAGE

$R^2 = .79$   
SE = 26.3


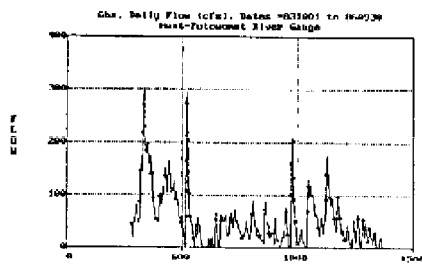


7-DAY MOVING AVERAGE

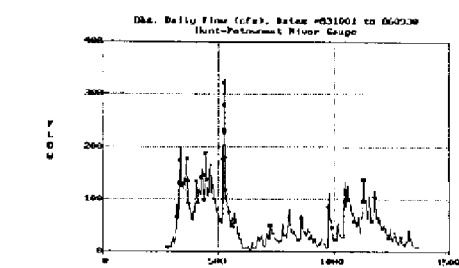

30-DAY MOVING AVERAGE

$R^2 = .80$   
SE = 22.3

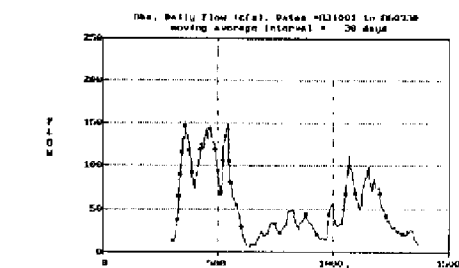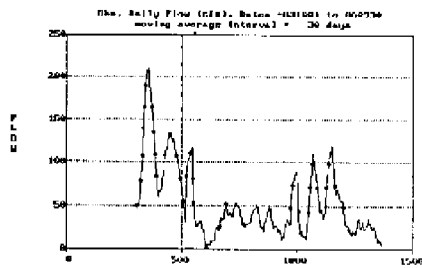

180-DAY MOVING AVERAGE

$R^2 = .83$   
SE = 13.8

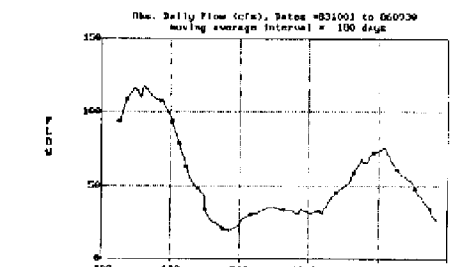
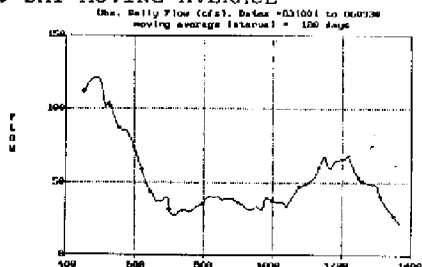


Figure 14  
Predicted Instantaneous Peak Flow - Hunt-Potowomut River

PREDICTED PEAK FLOW  
APRIL 11, 1983 4:30 AM  
JULIAN HOUR = 28,708 (FROM 12/31/79)  
OBSERVED PEAK = 968 CFS


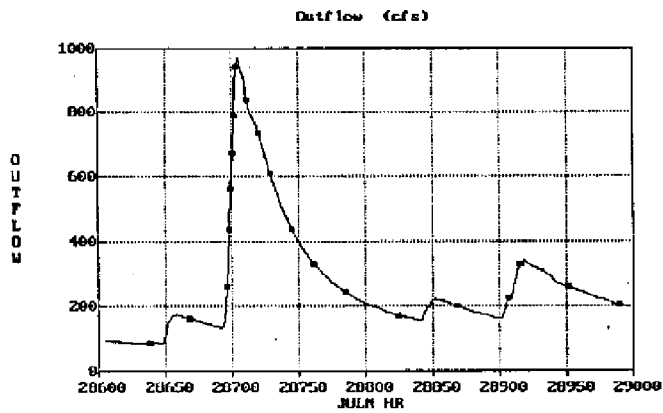


Figure 15  
Predicted and Observed Flows - Hunt-Potowomut River  
Verification Period - Water Years 1984-1986


X-Axis = Julian Days from 12/31/83  
Y-Axis = Streamflow (cfs)

PREDICTED - WY 1981-1983  
DAILY FLOWS

$R^2 = .70$   
SE = 29


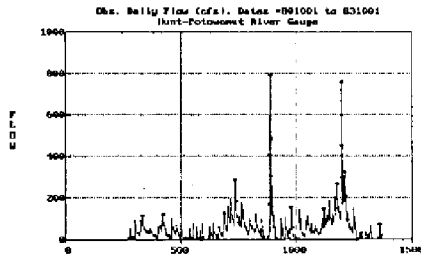


OBSERVED - WY 1981-1983

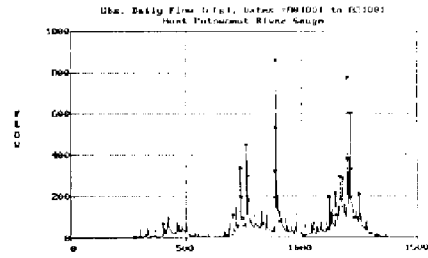



7-DAY MOVING AVERAGE

$R^2 = .70$   
SE = 25

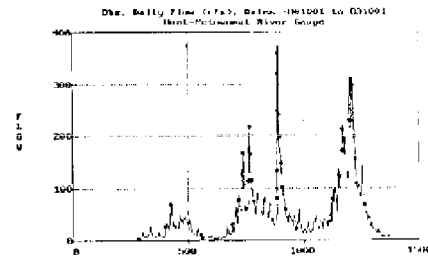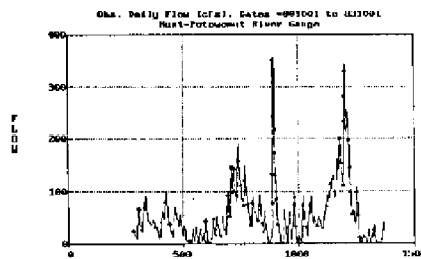

30-DAY MOVING AVERAGE

$R^2 = .70$   
SE = 21.3

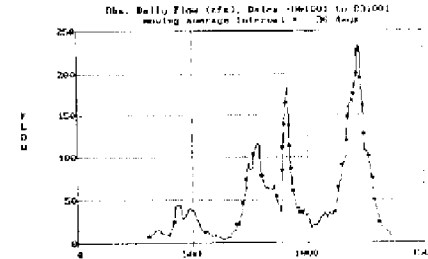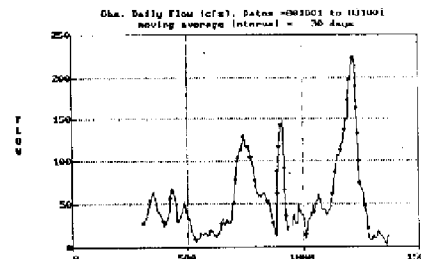

180-DAY MOVING AVERAGE

$R^2 = .87$   
SE = 10.2

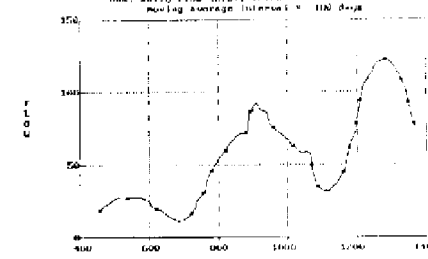
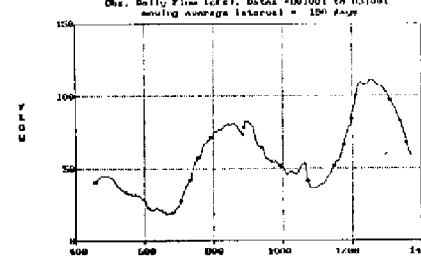




Figure 16  
Observed and Predicted Mean Daily Flows  
**HUNT-POTWOMUT GAUGE**

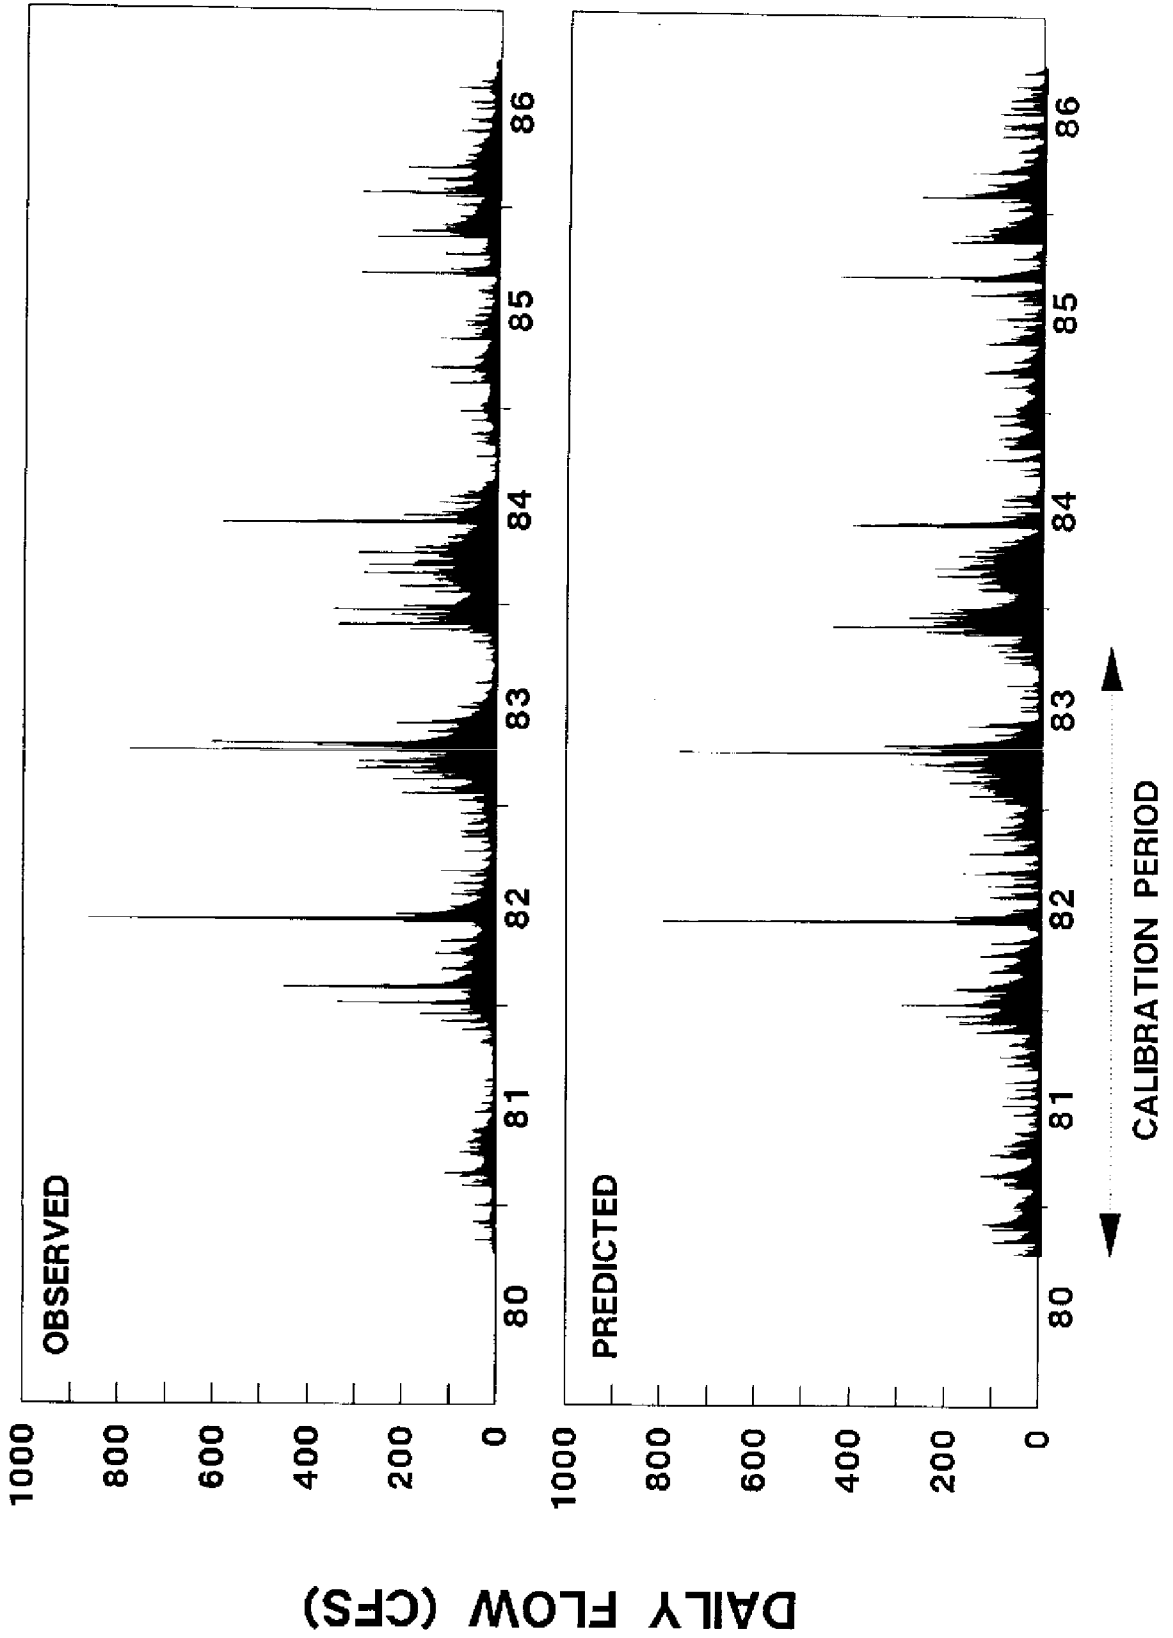


Figure 17  
Observed and Predicted Monthly Total Streamflow

### HUNT-POTOWOMUT GAUGE


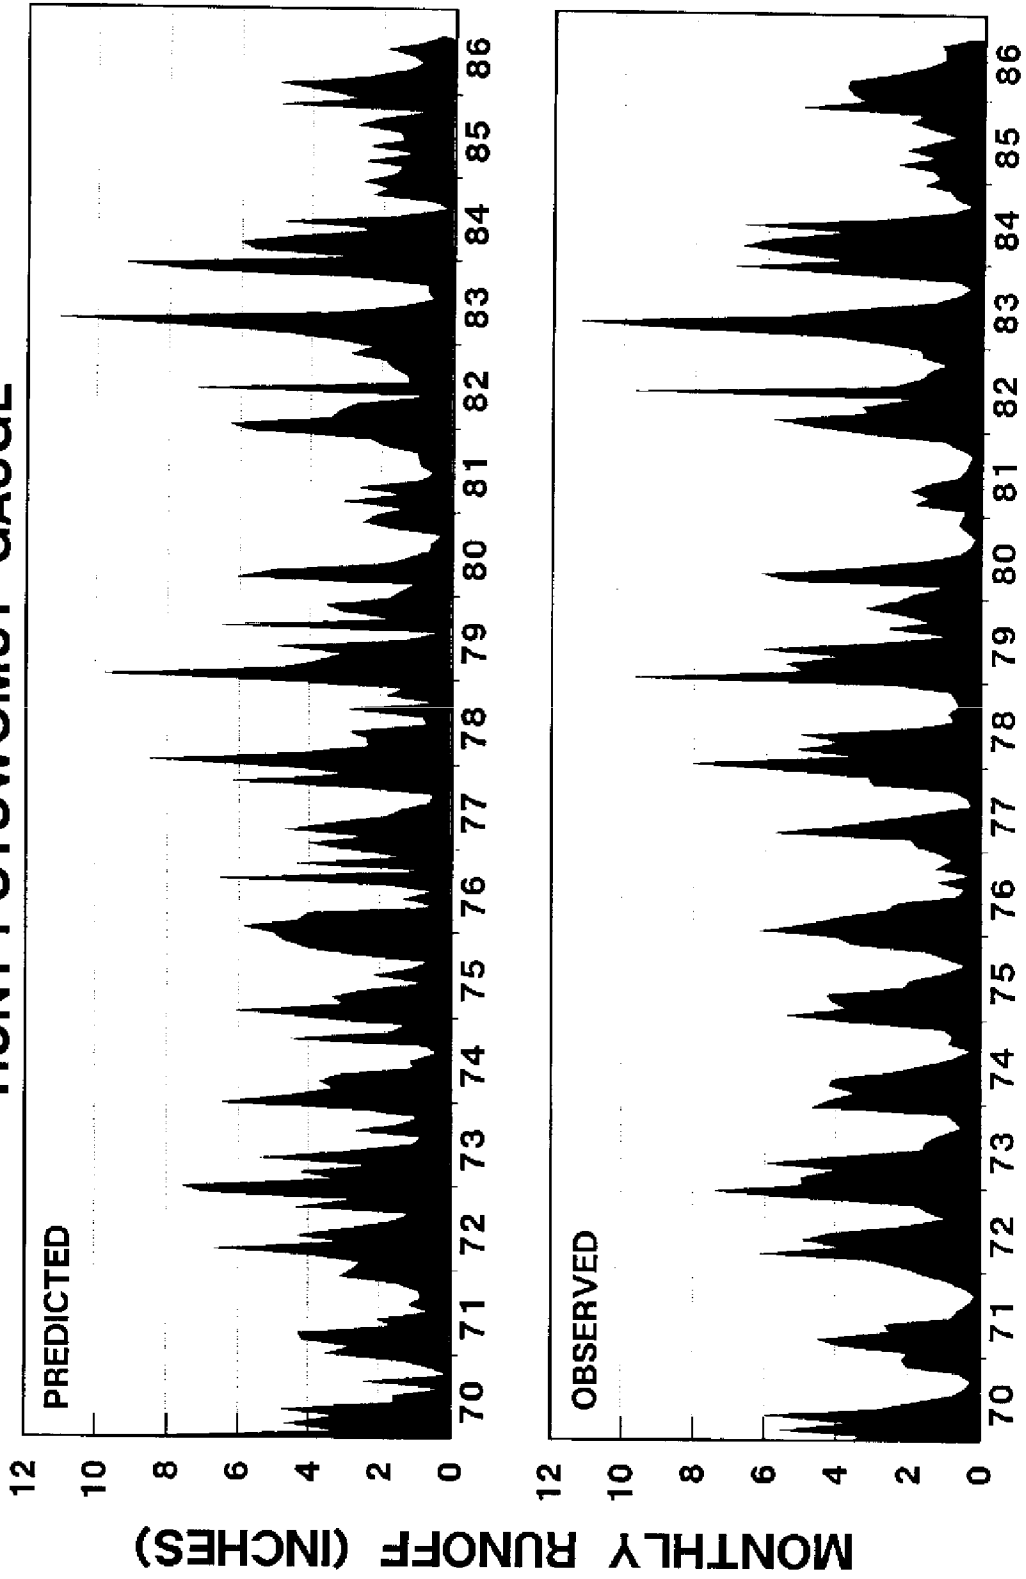


Figure 18  
Observed and Predicted 12-Month Moving-Average Streamflow

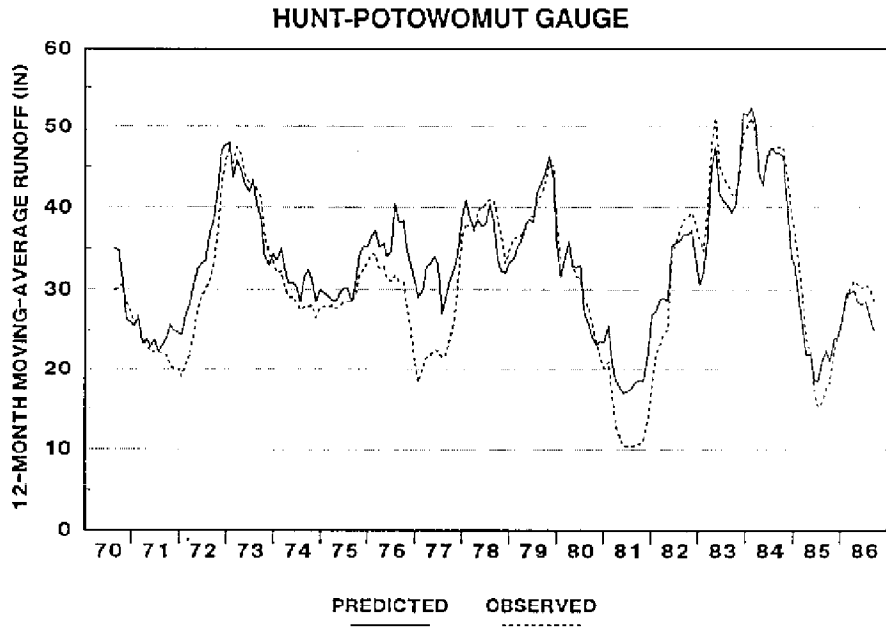

entire period of flow record (Water Years 1970-1986) are compared in Figure 17. Yearly moving-average flows are compared in Figure 18. The model over-predicts yearly-mean flows during drought periods (1971, 1977, 1981). This may be related to errors in the prediction of evapotranspiration or to the effects of diversion from the watershed for water supply purposes (not considered in simulations). The USGS (1977) reports that measured flows are affected by water supply diversions for East Greenwich, North Kingstown, Warwick, and Quonset Point (magnitudes of diversions not reported). Such diversions would tend to have greater impacts on measured streamflows during drought periods. Provision for flow diversions into or out of watersheds is suggested for future versions of the model; diversions would tend to be more important for simulation of large watersheds, as compared with simulations of individual urban developments.

The above comparisons support the structure and calibration of the hydrologic components of the model for predicting streamflow. Calibration and testing of water quality components against site-specific data (site-scale and watershed-scale) are recommended for future work.



#### 7.4 Effects of Precipitation Variations

Climatologic variations influence the quantity and quality of watershed runoff and the performance of runoff treatment devices. This section evaluates these variations using the entire precipitation record from Providence Airport (1948-1988). Results have implications for selecting appropriate time periods for simulating device performance, given the objective of estimating longterm means and/or extremes.


Figure 19 shows yearly variations in precipitation and flow-weighted-mean total suspended solids concentration. Simulations are for a typical urban watershed (25% impervious, pervious curve number = 74, NURP50.PAR parameter estimates). An inverse relationship between annual precipitation and mean TSS concentration is apparent. This reflects washoff dynamics inherent in the particle parameter estimates.

The simulated loads have been routed through five treatment devices, each initially sized for 70% TSS removal from a 1-inch, 24-hour, SCS Type-2 storm with a 75-hour time between storm midpoints. These are the same devices used in the sensitivity analysis discussed in Section 7.2. Figure 20 shows predicted longterm average removal efficiencies for TSS, fine particles (P10%), and dissolved species (P0%). Removal of dissolved species (filtration) occurs only in the infiltration basin and buffer strip. Longterm average TSS removal efficiencies range from 71.6% (extended detention pond) to 78.9% (infiltration basin), as compared with the 70% initial design basis. This indicates that the 1-inch, Type-2 storm provides a conservative basis for estimating longterm average TSS removal efficiency, particularly for infiltration basins. The advantage of using the 1-inch storm (in place of simulating the entire rainfall record) is that it requires much less computer time. The 1-inch storm can be used in preliminary design calculations to evaluate compliance with TSS removal objectives. Final evaluations should be based upon simulation of historical records (choice of time periods discussed below). Results are relatively insensitive to intensity distribution within the storm (e.g.,

Figure 19  
Yearly Precipitation and Mean Runoff TSS Concentration

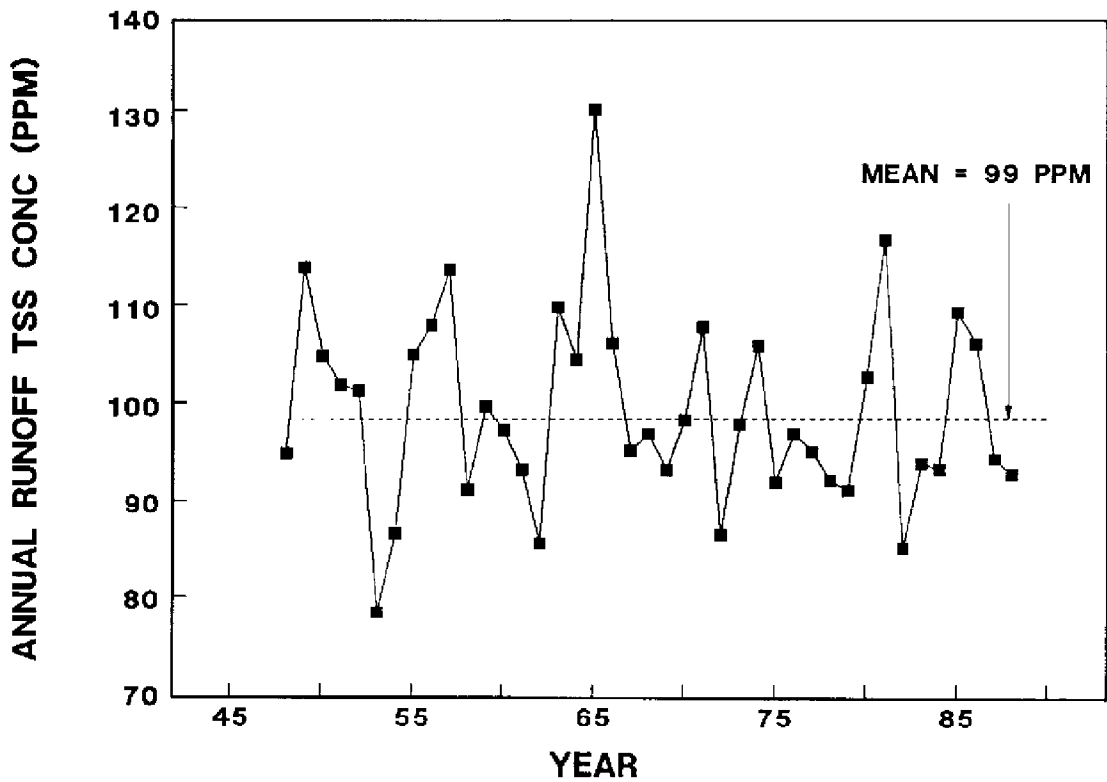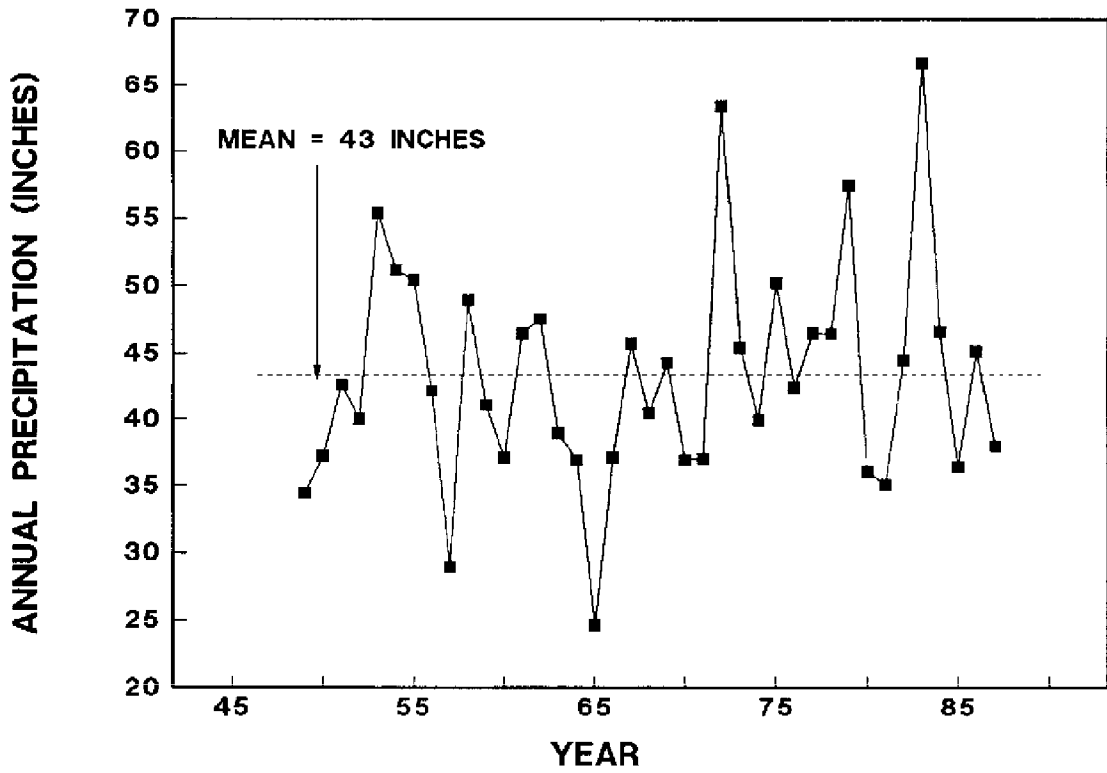

**Figure 20**  
**Longterm Average Removal Efficiencies for Dissolved Species, Fine**  
**Particles, and Total Suspended Solids**

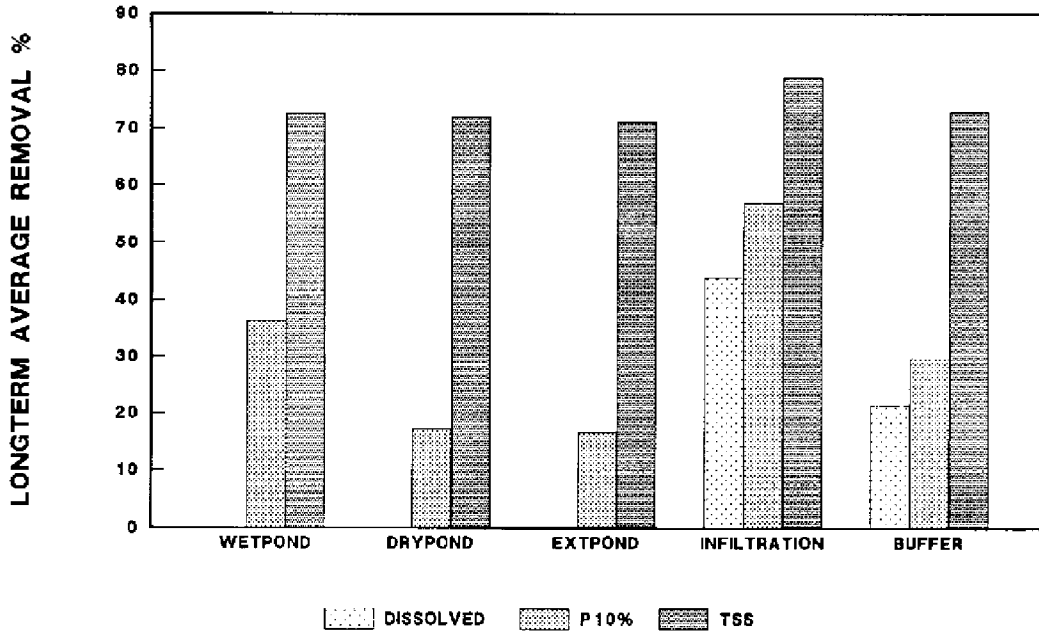

DEVICES DESIGNED FOR 70% TSS REMOVAL, 1-INCH, 24-HR TYPE 2 STORM  
LONGTERM AVERAGE REMOVALS COMPUTED USING PROVIDENCE 1948-87 RAINFALL

Type-2 vs. Type-3 vs. triangular). The Type-2 distribution has been selected arbitrarily.

Figure 21 shows yearly variations in TSS and fine particle (P10%) removal in each device. The strong year-to-year covariance in these time series reflects the influences of storm intensity and volume on device performance. It is apparent from Figures 20 and 21 that devices sized to achieve a given TSS removal objective will not necessarily have the same removal efficiencies for fine particles (or dissolved species). The dry pond and extended ponds, in particular, are considerably less effective than the other devices at removing fine particles at a given TSS removal. This is one important limitation of using TSS removal as the exclusive design objective. It may be more desirable to target a specific particle class. This limitation is discussed further in Section 8.0.

Figures 22 and 23 show yearly variations in TSS removal and outflow TSS concentrations for each device, respectively. Values are expressed as deviations from the 1948-1988 means. These plots can be used to identify years in which predicted removal efficiencies and outflow quality are similar to longterm averages. For years 1951, 1968, 1974, 1976, and 1980, both removal efficiencies and outflow concentrations are within two units (% or ppm) of the longterm mean for each device type. Results are similar for individual particle fractions. Annual rainfall was also within 2-inches of the longterm mean (43 in/yr) in 1951, 1968, and 1976. These years are logical choices for evaluating BMP's, given the objective of estimating the longterm-average removal efficiency or outflow quality. "Worst-case" (wet) years would include 1955, 1979, and 1983. "Best-case" (dry) years would include 1965 and 1981.


## 8.0 TREATMENT CRITERIA

As discussed in the Section 1.3, the primary intended use of the program is for designing BMP's to achieve compliance with removal objectives, expressed in terms of removal efficiency for a given particle class and time period. Appendix E outlines suggested procedures for using the model to design BMP(s) for a given site and objective. RIDEM (1988) has recommended two longterm TSS removal objectives (70% and 85%), depending upon receiving water characteristics. This section describes typical device designs to achieve these objectives and examines the water quality implications of meeting these objectives.

The model has been used to size four basic device types to achieve 70% and 85% TSS removal for an average year. Based upon results in Section 7.4, precipitation data from 1980 have been used for this purpose. The following device types have been considered:

- (1) Wet detention ponds with mean depths of 2, 3.5 and 5 feet.
- (2) Dry detention ponds with flood pool mean depths of 3.5 feet and drawdown times of 3, 6, 12, 24, and 48 hours.
- (3) Infiltration basins with infiltration rates of .1, .25, .5, and 1.0 inches/hr and maximum drawdown time of 72 hours (maximum

Figure 21  
Yearly Variations in TSS and Fine Particle Removal Efficiency

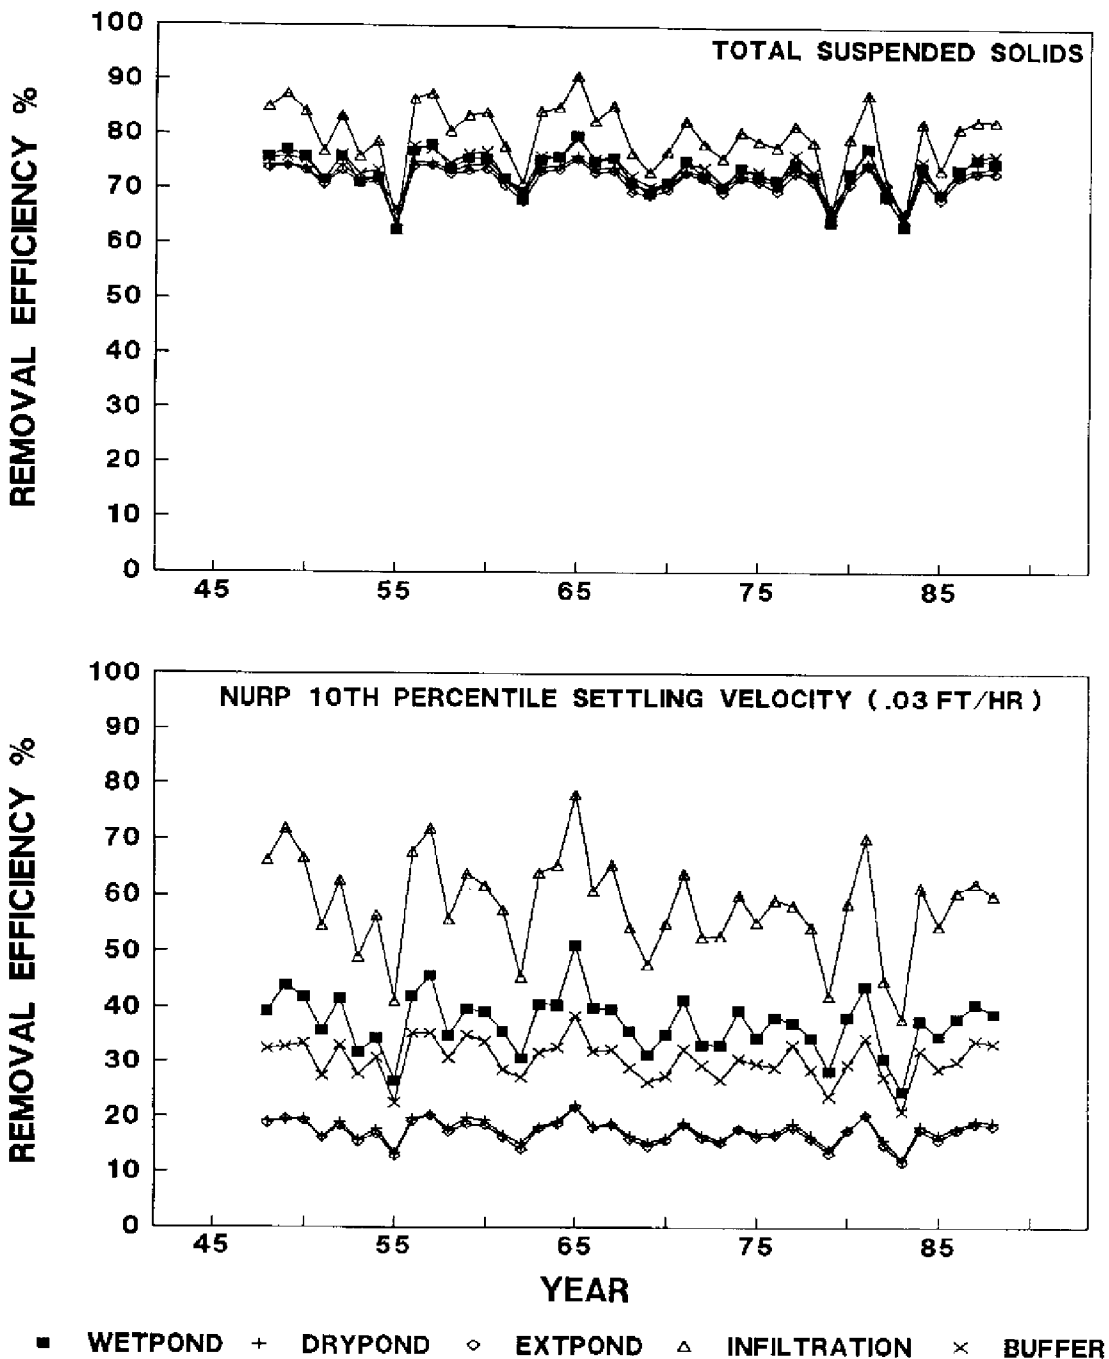

DEVICES DESIGNED FOR 70% TSS REMOVAL, 1-INCH, 24-HR TYPE2 STORM



Figure 22  
Yearly Deviations from Longterm Average TSS Removal


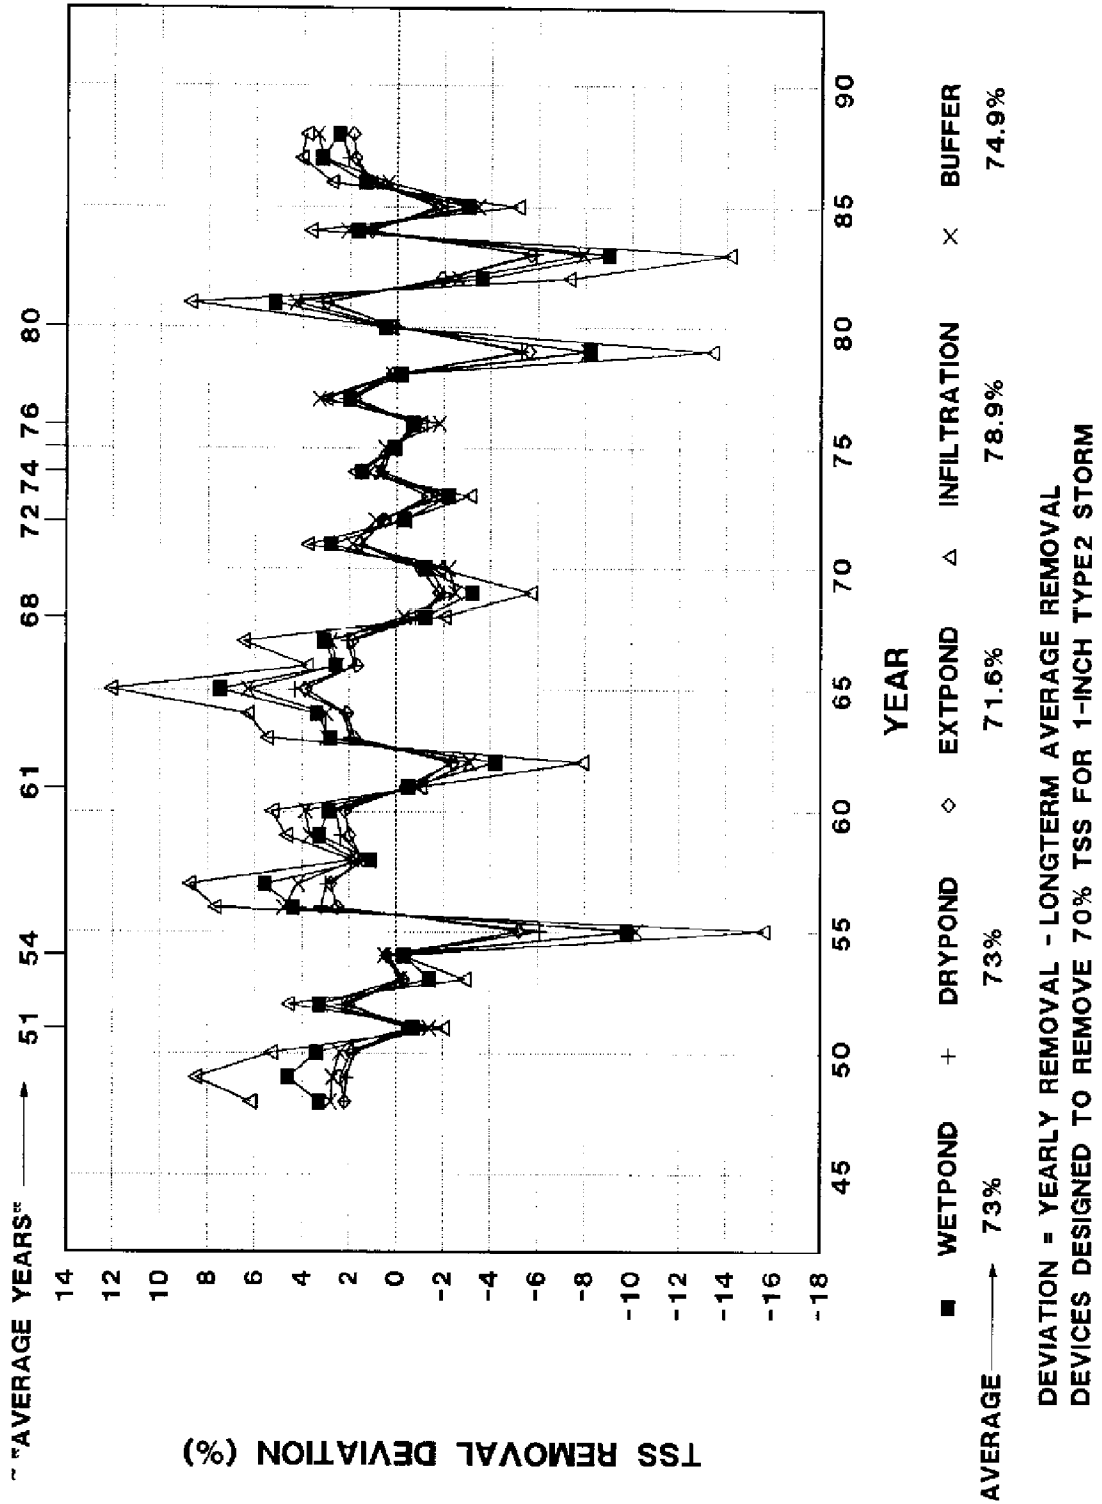


Figure 23  
Yearly Deviations from Longterm Average TSS Outflow Concentration

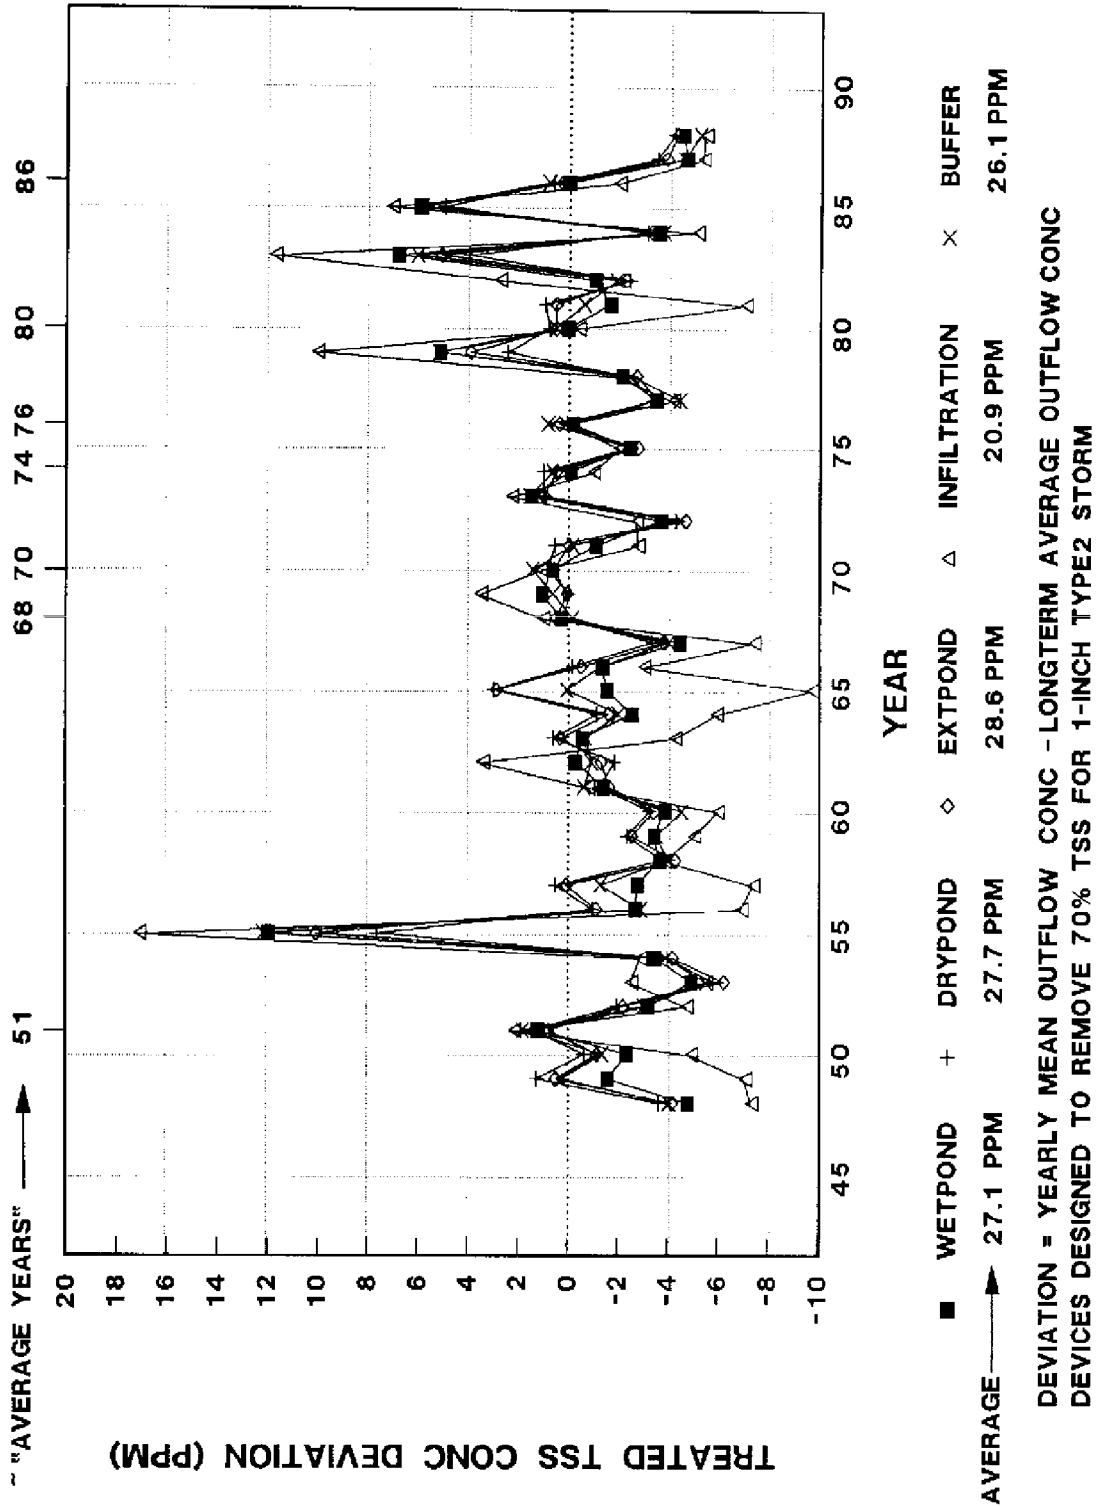

drawdown time and infiltration rate determine maximum depth of storage volume).

- (4) Buffer strips with infiltration rates of 0, .25, .5, and 1.0 inches/yr and slope of 2% and manning's n of .2.

This is not intended to be a comprehensive list of all possible device types. Alternative designs can be investigated using the model and approach described below.


The model's 'Run Design Tune' procedure, has been used to estimate the area of each device required to achieve each treatment objective for 1980 rainfall. Each device treats runoff from a watershed with 25% imperviousness and pervious curve number of 74. Resulting device dimensions are expressed in terms of ratio of device surface area to impervious watershed area. Relative areas are plotted in Figure 24. Any of these devices can be rescaled to a user-defined watershed by applying the 'Run Design Lookup' procedure (see Section 4.2).

Removal efficiencies and average outflow concentrations for each particle class, water quality component, and device are summarized in Tables 8 and 9 for TSS removals of 70% and 85%, respectively. Because of differences in dynamics, different device types designed to achieve the same total suspended solids removal will not necessarily have the same removal efficiency for each particle class or the same distribution of outflow quality. This is also apparent in Figure 21.

One important factor is the reduction in concentration variability which is achieved in devices with appreciable storage volume (e.g., wet ponds), as compared with devices without storage (e.g., buffers, dry ponds). This reduction in variability causes maximum outflow concentrations to be lower in ponds, as compared with buffers, even though mean concentrations may be similar. For example, compare mean and maximum outflow copper concentrations in wet detention ponds (~.018 and ~.021 ppm) with values for buffer strips (~.013 and ~.027) for the same TSS removal objective (Table 9). NURP identified copper as a key urban runoff contaminant based upon comparison of typical runoff concentrations with aquatic toxicity criteria (Athayade et al., 1983). A concentration of .02 ppm was proposed as an appropriate criterion for onset of toxic effects attributed to intermittent exposure in soft waters.

Figure 25 justifies the 85% TSS removal objective based upon predicted violation frequencies of the NURP .02 ppm copper criterion. Copper violation frequency is plotted against TSS removal efficiency, based upon simulation of wet detention ponds with a range of basin/watershed area ratios and 1980 rainfall. At low solids removal efficiencies, violation frequency averages ~70%, which essentially reflects the distribution of untreated runoff concentrations simulated by the model. As TSS removal efficiency increases, violation frequency decreases and drops below ~5% at or above a TSS removal of ~85%. A similar relationship is shown for fine particle removal efficiencies (P10% = NURP 10th percentile, settling velocity = .03 ft/hr); copper violations are eliminated at P10% removal efficiencies exceeding ~60-65%.

**Figure 24**  
**Device Relative Areas Required to Achieve 70% and 85% TSS Removal**

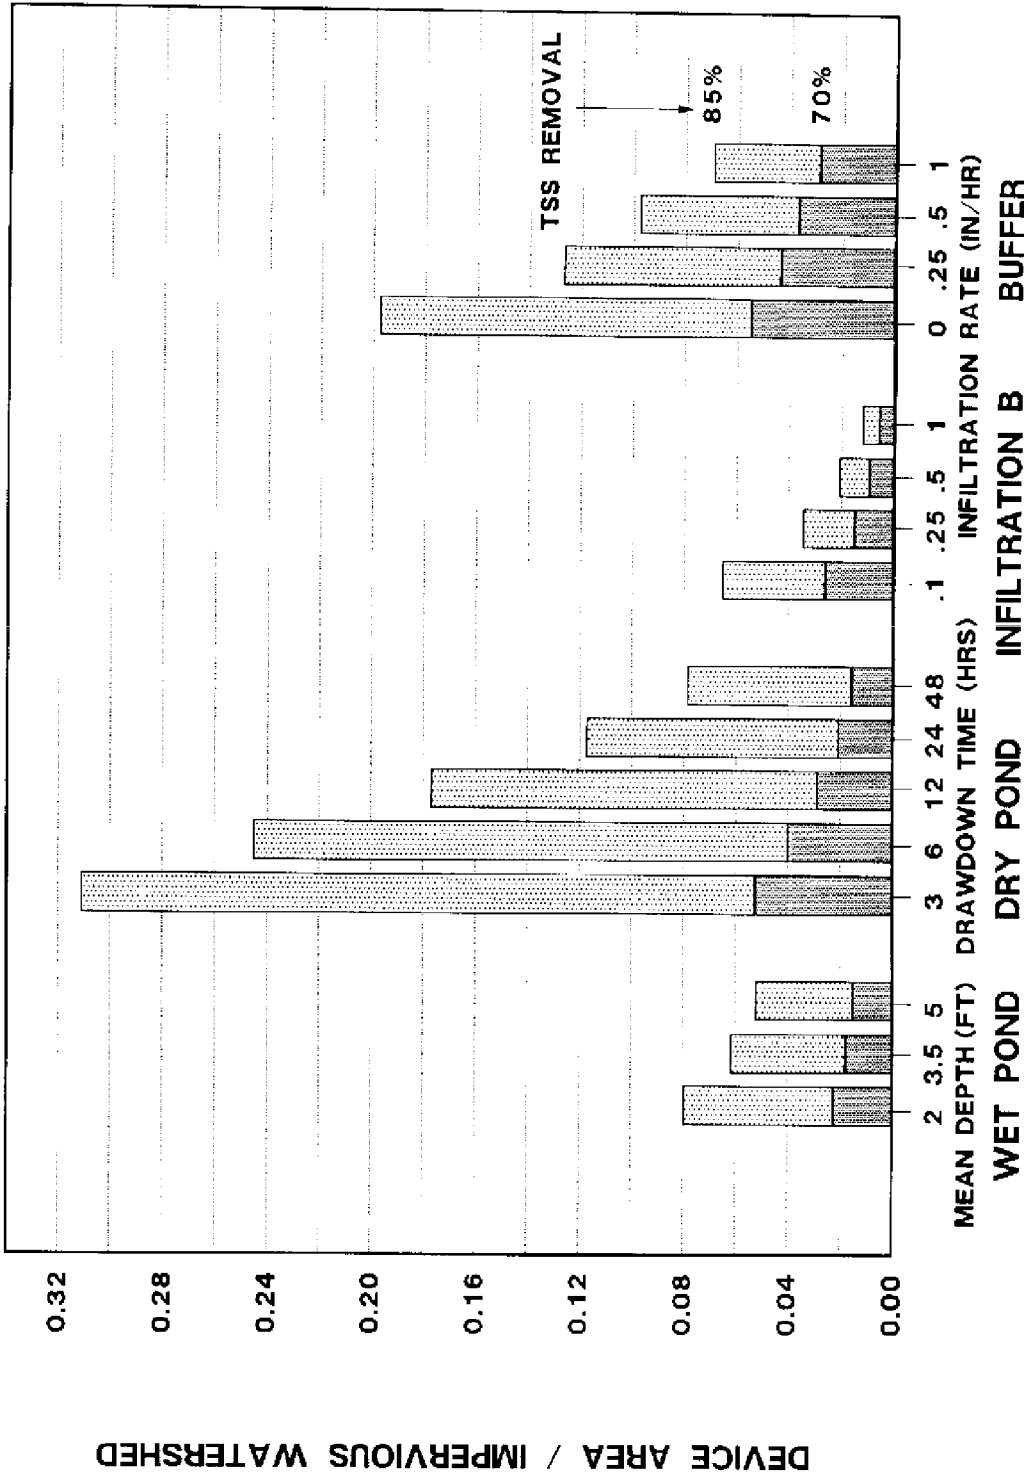

BASED ON SIMULATION PROVIDENCE 1980 PRECIPITATION (AVERAGE YEAR)

**Table 8**  
**Performance of Devices Designed for 70% TSS Removal**

DEVICE	POZ	P10Z	P30Z	P50Z	P80Z	TSS	TP	TKN	COPPER	LEAD	ZINC	BC
<b>REMOVAL EFFICIENCIES (%)</b>												
1	0.0	36.7	53.3	71.9	84.1	70.0	38.2	32.8	32.8	63.2	32.8	63.2
2	0.0	38.0	55.5	70.8	92.9	70.0	38.7	33.3	33.3	63.2	33.3	63.2
3	0.0	38.2	57.2	70.5	92.1	70.0	39.1	33.6	33.6	63.2	33.6	63.2
4	0.0	15.0	55.9	83.6	97.8	70.0	36.4	31.3	31.3	63.2	31.3	63.2
5	0.0	15.5	55.7	83.4	97.7	70.0	36.4	31.3	31.3	63.2	31.3	63.2
6	0.0	16.5	55.9	82.9	97.4	70.0	36.6	31.5	31.5	63.2	31.5	63.2
7	0.0	18.2	56.7	81.9	96.6	70.0	37.0	31.8	31.8	63.2	31.8	63.2
8	0.0	20.6	57.4	80.3	95.8	70.0	37.3	32.1	32.1	63.2	32.1	63.2
9	19.8	30.4	52.2	76.0	95.7	70.0	43.2	39.9	39.9	65.1	39.9	65.1
10	26.7	37.9	52.5	72.1	93.7	70.0	46.1	43.4	43.4	65.8	43.4	65.8
11	31.4	43.1	53.6	69.7	91.7	70.0	48.4	46.0	46.0	66.3	46.0	66.3
12	35.7	48.3	55.2	67.8	89.3	70.0	50.8	48.7	48.7	66.7	48.7	66.7
13	0.0	16.5	55.7	82.6	97.6	70.0	36.5	31.4	31.4	63.2	31.4	63.2
14	12.2	21.7	53.7	80.4	97.1	70.0	40.3	36.4	36.4	64.4	36.4	64.4
15	17.8	25.4	52.6	78.7	96.7	70.0	42.1	38.7	38.7	64.9	38.7	64.9
16	24.3	30.6	51.5	76.1	95.9	70.0	44.4	41.6	41.6	65.6	41.6	65.6

**FLOW-WEIGHTED-MEAN OUTFLOW CONCENTRATIONS (PPM)**

1	1.00	13.07	9.67	5.82	2.46	31.02	0.21	1.03	0.023	0.008	0.110	0.95
2	1.00	12.77	9.23	6.05	2.95	31.00	0.21	1.02	0.023	0.008	0.109	0.95
3	1.00	12.73	8.85	6.12	3.29	30.98	0.21	1.01	0.023	0.008	0.108	0.95
4	1.00	17.60	9.13	3.41	0.93	31.07	0.22	1.05	0.024	0.008	0.112	0.95
5	1.00	17.51	9.18	3.44	0.94	31.07	0.22	1.05	0.024	0.008	0.112	0.95
6	1.00	17.30	9.13	3.54	1.09	31.07	0.21	1.05	0.024	0.008	0.112	0.95
7	1.00	16.94	8.98	3.76	1.39	31.07	0.21	1.05	0.024	0.008	0.111	0.95
8	1.00	16.46	8.82	4.07	1.72	31.08	0.21	1.04	0.024	0.008	0.111	0.95
9	0.80	14.43	9.91	4.99	1.79	31.12	0.19	0.92	0.021	0.007	0.098	0.90
10	0.73	12.88	9.84	5.78	2.60	31.09	0.18	0.87	0.020	0.007	0.092	0.88
11	0.69	11.78	9.61	6.27	3.42	31.09	0.17	0.83	0.019	0.007	0.088	0.87
12	0.64	10.72	9.28	6.66	4.41	31.07	0.17	0.79	0.018	0.007	0.084	0.86
13	0.99	17.13	9.09	3.56	0.99	30.77	0.21	1.04	0.024	0.008	0.111	0.94
14	0.87	15.99	9.48	4.01	1.19	30.65	0.20	0.96	0.022	0.007	0.103	0.91
15	0.82	15.35	9.76	4.39	1.37	30.87	0.19	0.93	0.021	0.007	0.099	0.90
16	0.77	14.57	10.20	5.03	1.71	31.50	0.19	0.91	0.021	0.007	0.097	0.90

**EVENT-MEAN COPPER CONCENTRATIONS (PPM)**

DEVICE	MEAN	MAX	VIOLATION FREQUENCIES (%)			DEVICE	Ab/Ai
			A	B	C		
1	0.023	0.034	0.0	79.1	32.7	1 wet pond, z=2	2.24%
2	0.023	0.032	0.0	79.1	31.8	2 wet pond, z=3.5	1.77%
3	0.023	0.030	0.0	79.1	30.9	3 wet pond, z=5	1.52%
4	0.024	0.044	0.0	80.9	39.1	4 dry pond, z=3.5, td=3	5.26%
5	0.024	0.042	0.0	83.6	38.2	5 dry pond, z=3.5, td=6	4.02%
6	0.024	0.040	0.0	86.4	38.2	6 dry pond, z=3.5, td=12	2.90%
7	0.024	0.038	0.0	89.1	38.2	7 dry pond, z=3.5, td=24	2.09%
8	0.024	0.038	0.0	93.6	39.1	8 dry pond, z=3.5, td=48	1.59%
9	0.021	0.038	0.0	42.7	23.6	9 infilt b, i=1	2.63%
10	0.020	0.035	0.0	33.6	19.1	10 infilt b, i=.25	1.50%
11	0.019	0.035	0.0	27.3	14.6	11 infilt b, i=.5	0.94%
12	0.018	0.036	0.0	20.9	12.7	12 infilt b, i=1	0.58%
13	0.024	0.046	0.0	83.6	35.5	13 buffer, i=0	5.49%
14	0.022	0.046	0.0	62.7	29.1	14 buffer, i=.25	4.37%
15	0.021	0.046	0.0	53.6	26.4	15 buffer, i=.5	3.70%
16	0.021	0.050	0.0	45.5	26.4	16 buffer, i=1.0	2.89%

\* COPPER CRITERIA PPM Ab/Ai = Device Area/Imperv. Watershed Area  
 A Drinking Water 2  
 B RI Fresh. Aquatic Life 0.0048  
 C NURP Threshold 0.02

Based upon simulation of Providence 1980 precipitation. Outflow concentrations and violation frequencies refer to sum of surface and groundwater discharges.

Table 9  
Performance of Devices Designed for 85% TSS Removal

DEVICE	P0%	P10%	P30%	P50%	P80%	TSS	TP	TKN	COPPER	LEAD	ZINC	BC
REMOVAL EFFICIENCIES (%)												
1	0.0	63.0	76.7	88.8	98.2	85.0	53.9	46.4	46.4	76.8	46.4	76.8
2	0.0	63.8	77.8	87.8	97.8	85.0	54.1	46.5	46.5	76.8	46.5	76.8
3	0.0	63.7	78.9	87.5	97.5	85.0	54.3	46.7	46.7	76.8	46.7	76.8
4	0.0	44.4	85.1	96.2	99.6	85.0	53.2	45.8	45.8	76.7	45.8	76.7
5	0.0	44.6	85.0	96.1	99.6	85.0	53.2	45.8	45.8	76.7	45.8	76.7
6	0.0	45.0	84.8	96.0	99.6	85.0	53.2	45.8	45.8	76.7	45.8	76.7
7	0.0	45.4	84.5	95.9	99.6	85.0	53.3	45.8	45.8	76.8	45.8	76.8
8	0.0	46.8	84.1	95.3	99.4	85.0	53.3	45.9	45.9	76.8	45.9	76.8
9	38.5	59.0	77.7	90.8	98.7	85.0	64.9	61.2	61.2	80.5	61.2	80.5
10	45.3	64.3	76.6	88.5	97.9	85.0	67.3	64.2	64.2	81.2	64.2	81.2
11	49.5	68.4	76.3	86.3	97.0	85.0	68.0	66.3	66.3	81.6	66.3	81.6
12	53.4	72.1	76.8	84.6	95.7	85.0	70.7	68.3	68.3	81.9	68.3	81.9
13	0.0	47.2	83.6	95.3	99.5	85.0	53.3	45.8	45.8	76.8	45.8	76.8
14	31.3	52.8	80.3	93.5	99.2	85.0	62.6	58.2	58.2	79.8	58.2	79.8
15	37.9	56.2	78.5	92.3	99.0	85.0	64.6	60.9	60.9	80.4	60.9	80.4
16	43.9	60.6	76.9	90.5	98.7	85.1	66.6	63.4	63.4	81.1	63.4	81.1

FLOW-WEIGHTED-MEAN OUTFLOW CONCENTRATIONS (PPM)

RUNOFF	1.00	20.71	20.71	20.71	41.43	103.6	0.34	1.53	0.035	0.021	0.163	2.58
1	0.98	7.59	4.82	2.32	0.74	15.5	0.15	0.81	0.018	0.005	0.086	0.59
2	0.97	7.40	4.59	2.52	0.93	15.4	0.15	0.80	0.018	0.005	0.085	0.59
3	0.96	7.39	4.36	2.60	1.06	15.4	0.15	0.79	0.018	0.005	0.084	0.59
4	1.00	11.52	3.09	0.80	0.17	15.6	0.16	0.83	0.019	0.005	0.089	0.60
5	1.00	11.47	3.12	0.81	0.18	15.6	0.16	0.83	0.019	0.005	0.089	0.60
6	1.00	11.38	3.16	0.84	0.18	15.6	0.16	0.83	0.019	0.005	0.089	0.60
7	1.00	11.31	3.20	0.85	0.18	15.5	0.16	0.83	0.019	0.005	0.089	0.60
8	1.00	11.02	3.30	0.98	0.25	15.5	0.16	0.83	0.019	0.005	0.088	0.60
9	0.61	8.49	4.61	1.90	0.56	15.5	0.12	0.59	0.013	0.004	0.063	0.50
10	0.55	7.40	4.85	2.39	0.86	15.5	0.11	0.55	0.012	0.004	0.058	0.49
11	0.50	6.55	4.92	2.83	1.26	15.6	0.11	0.52	0.012	0.004	0.055	0.48
12	0.47	5.78	4.81	3.21	1.80	15.6	0.10	0.49	0.011	0.004	0.052	0.47
13	1.00	10.93	3.39	0.98	0.23	15.5	0.16	0.83	0.019	0.005	0.088	0.60
14	0.68	9.77	4.08	1.35	0.33	15.5	0.13	0.64	0.014	0.004	0.068	0.52
15	0.62	9.16	4.49	1.62	0.42	15.7	0.12	0.60	0.014	0.004	0.064	0.51
16	0.58	8.46	4.99	2.04	0.57	16.1	0.12	0.58	0.013	0.004	0.062	0.51

EVENT-MEAN COPPER CONCENTRATIONS (PPM)

DEVICE	MEAN	MAX	VIOLATION FREQ (%) *			DEVICE	Ab/Ai
			A	B	C		
1	0.018	0.021	0.0	79.1	1.8	1 wet pond, z=2	8.02%
2	0.018	0.021	0.0	79.1	0.9	2 wet pond, z=3.5	6.18%
3	0.018	0.021	0.0	79.1	0.9	3 wet pond, z=5	5.23%
4	0.019	0.028	0.0	80.9	15.5	4 dry pond, z=3.5, td=3	31.12%
5	0.019	0.027	0.0	83.6	14.6	5 dry pond, z=3.5, td=6	24.53%
6	0.019	0.025	0.0	85.4	13.6	6 dry pond, z=3.5, td=12	17.70%
7	0.019	0.025	0.0	89.1	14.6	7 dry pond, z=3.5, td=24	11.74%
8	0.019	0.027	0.0	93.6	14.6	8 dry pond, z=3.5, td=48	7.88%
9	0.013	0.023	0.0	18.2	1.8	9 infilt b, i=1	6.56%
10	0.012	0.023	0.0	14.6	1.8	10 infilt b, i=.25	3.49%
11	0.012	0.023	0.0	11.8	1.8	11 infilt b, i=.5	2.07%
12	0.011	0.023	0.0	9.1	0.9	12 infilt b, i=1	1.22%
13	0.019	0.026	0.0	91.8	13.6	13 buffer, i=0	19.75%
14	0.014	0.024	0.0	39.1	1.8	14 buffer, i=.25	12.58%
15	0.014	0.025	0.0	32.7	2.7	15 buffer, i=.5	9.82%
16	0.013	0.027	0.0	28.2	3.6	16 buffer, i=1.0	6.98%


\* COPPER CRITERIA

A	Drinking Water	2
B	RI Fresh. Aquatic Life	0.0048
C	NURP Threshold	0.02

Ab/Ai = Device Area/Imperv. Watershed Area

Based upon simulation of Providence 1980 precipitation. Outflow concentrations and violation frequencies refer to sum of surface and groundwater discharges.

**Figure 25**  
**Relationship between Suspended Solids Removal and Violations in Copper**  
**Toxicity Criterion for Wet Ponds Treating Median NURP Sites**

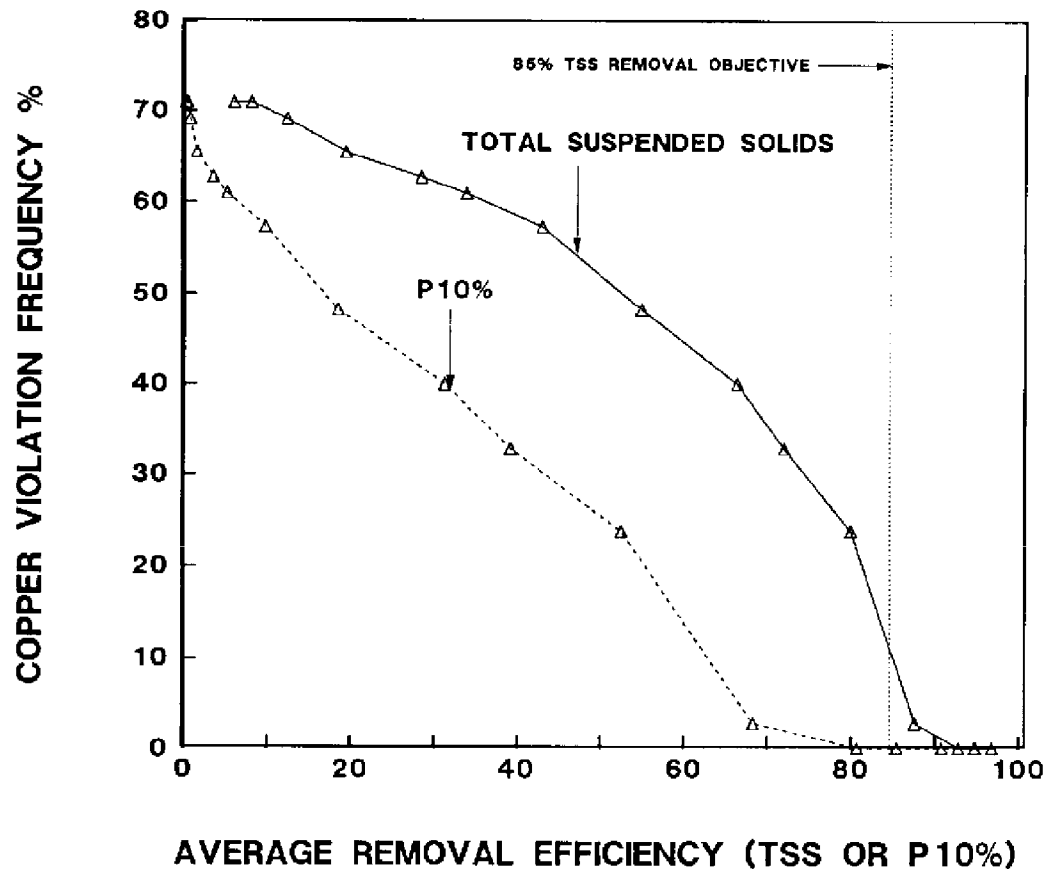

Y-AXIS = PERCENT OF EVENTS WITH MEAN OUTFLOW COPPER CONC. > .02 PPM

.02 PPM = NURP COPPER TOXICITY CRITERION FOR SOFT WATERS

= THRESHOLD EFFECT LEVEL FOR INTERMITTENT EXPOSURE

P10% = PARTICLE SETTLING VELOCITY = .03 FT/HR = NURP 10TH PERCENTILE

BASED ON SIMULATION OF WET PONDS WITH VARIOUS AB/AW RATIOS

PROVIDENCE 1980 PRECIPITATION

MEDIAN NURP SITE - RUNOFF COPPER CONC. = .034 PPM

These results indicate that a TSS removal objective of 85% for wet pond design is consistent with avoiding violations in the NURP .02 ppm copper criterion for the 1980 storm sequence. The Rhode Island freshwater toxicity standard (.0048 ppb, Table 4) is practically unachievable in runoff treatment systems (at least insofar as the model is concerned because soluble copper removal mechanisms are not considered). The applicability of such standards (based upon laboratory dosing studies using dissolved copper) to runoff situations (intermittent exposure, appreciable particulate fraction) has been questioned, however (Athayede et al., 1983; Daves, 1986; Mancini and Plummer, 1986).

Figure 25 applies to a typical NURP monitoring site (median runoff copper concentration ~.034 ppm, Table 3). A logical extension of these results would be to incorporate effects of site-to-site variability in runoff concentrations. In this way, predictions of violation frequency could be made which reflect both the temporal variability simulated by the model (driven by storm sequence, watershed characteristics, device characteristics, particle characteristics) and uncertainty in predicting untreated runoff concentrations. As discussed in Section 6.4, lack of realistic toxicity criteria limits interpretation of violation frequencies and extent to which they can be used as direct bases for BMP design or for impact analyses.


Alternative design criteria targeting fine particles (e.g., P10%) may provide better protection of downstream water quality than criteria based upon TSS alone, given the tendency of many runoff contaminants to be associated with fine particles. For example, a 60-65% removal efficiency for P10% is typical of wet ponds designed for 85% total suspended solids removal (Table 9) and is consistent with reductions in copper violation frequency (Figure 25). The development of new performance standards or design criteria for BMP's has important economic and environmental implications and is beyond the scope of this report. The model could be used to evaluate the engineering implications of adopting alternative performance standards on a site-specific or regional basis.

Figure 26 shows particle settling velocities predicted from Stoke's Law as a function of particle diameter and specific gravity over ranges which are typical of urban runoff (Stahre and Urbonas, 1990). The NURP settling velocity distribution used in model calibration was based upon direct measurement of settling velocities in ~50 runoff samples (Driscoll, 1983; USEPA, 1986). Figure 26 shows that the NURP 10th percentile velocity (.03 ft/hr) corresponds to particle diameters from ~2 to ~8 microns for specific gravities between 2.65 and 1.08.

Through analysis of site-specific or regional runoff data, it should be possible to identify local runoff treatment objectives, expressed in terms of a target settling velocity (or equivalent particle diameter and density) and removal efficiency. If the water quality contaminant of primary concern is found to be concentrated in particles of a certain particle diameter and density, Figure 26 can be used to estimate an equivalent settling velocity for use in the model. For example, if the key contaminant is associated with particles exceeding 10 microns in diameter with a specific gravity of 1.5, then simulations of a particle class with a settling velocity of .3 ft/hr would provide a conservative



Figure 26  
Particle Settling Velocity vs. Diameter and Density

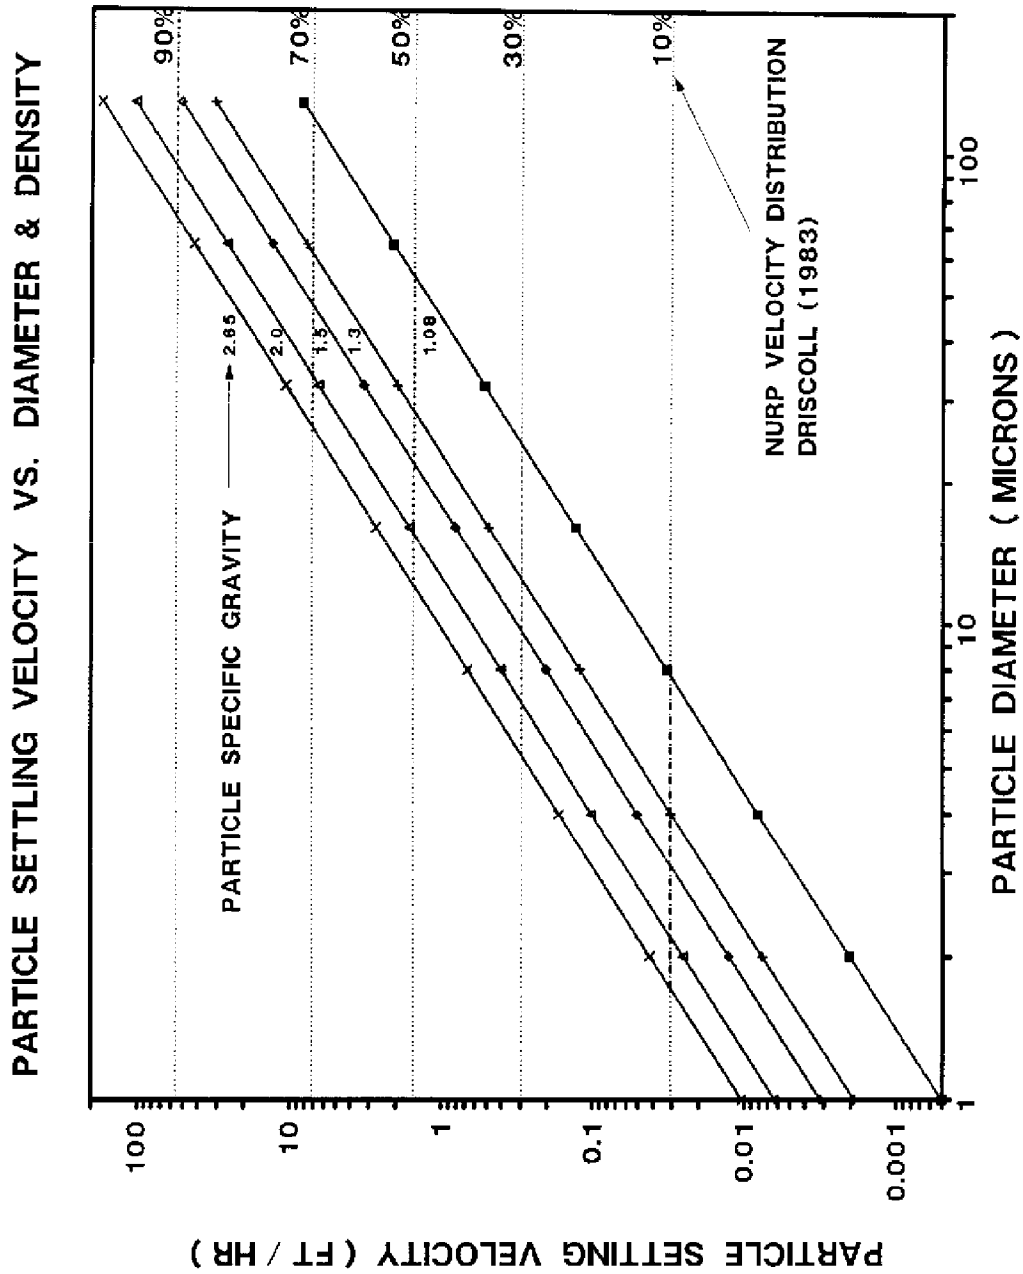

VELOCITIES PREDICTED FROM STOKES' LAW  
FIGURE MODIFIED FROM STAHR & URBONAS (1990)

estimate of the degree of contaminant control. Alternatively, settling velocity distributions for individual contaminants could be measured directly from runoff samples using methodologies described by Whipple and Hunter (1981), Driscoll (1986), Grizzard et al. (1986), and USEPA (1986). In this way, model parameters and treatment objectives can be adapted to regional or site-specific conditions.

#### 9.0 MODEL LIMITATIONS

Model limitations must be considered by the user in running the model and interpreting its output. Following are the major limitations associated with watershed simulations:

- (1) All precipitation is assumed to be rainfall. No snowfall or snowmelt.
- (2) Effects of variations in vegetation type on evapotranspiration are not considered. This relationship is not easily parameterized and influences the computation of baseflow only. Reasonable simulations of observed streamflows in the Hunt-Potowomut River have been produced without adjusting default evapotranspiration coefficients or accounting for snowfall/snowmelt.
- (4) Watershed runoff response to excess precipitation is instantaneous. A "PIPE" can be used to retard response if watershed time of concentration is sizeable in relation to the rainfall time step (1 hour). This will be more important in simulating intensity-sensitive devices (buffers, swales) than in simulating devices with appreciable storage volumes (detention ponds, infiltration basins). Watershed lag is not simulated.
- (5) Erosion is not directly simulated. The model is geared to stable urban watersheds in which impervious surfaces are the primary sources of runoff and loads. The empirical concentration vs. intensity relationship used for pervious areas is sufficient for relative predictions (removal efficiency). If absolute predictions are desired, the empirical "load factor" must be adjusted to account for variations in erosion factors (soil types, slopes, slope lengths, vegetative cover, land use practices) from one watershed to another.
- (6) The model is oriented more to predicting effectiveness of onsite or regional treatment devices (detention ponds, etc.) than to predicting effectiveness of source controls (erosion controls, street sweeping, etc.). The calibration of street-sweeping efficiencies is approximate and should be revised based upon site-specific data if the model is used to evaluate benefits of street sweeping.
- (7) Effects of land uses on particle and contaminant loadings are related to impervious area and soil type. Particle and contaminant concentrations in surface runoff from pervious and impervious areas are similar. For a given impervious fraction and curve number, runoff concentrations are assumed to be independent of land use. Essentially, this reflects NURP conclusions (Athayede et al, 1983). Alternative assumptions may be made by adjusting the appropriate watershed input parameters (e.g., watershed pollutant scale factors).

Future versions of the model may provide greater flexibility for predicting contaminant loads by permitting specification of multiple particle/component matrices (to reflect different land uses, for example). Lack of calibration data would preclude exercise of this freedom in most cases, however.

- (8) Runoff from impervious surfaces is equated to rainfall, once depression storage has been filled. This is a conservative assumption which is consistent with SWMM and other models. Direct field measurements of rainfall and runoff from various surface types (flat roofs, pitched roofs, roadways) suggest that actual runoff volumes often tend to be lower than those predicted based upon this assumption because of water losses attributed to interception by overhanging vegetation, evaporation, infiltration through pavement, and sorption by dirt/debris (Pitt, 1987; Pitt and Potter, 1990). Because of the complexities, data needs, and uncertainties involved in predicting these losses, they are ignored in this version of the model.
- (9) Runoff from pervious surfaces is predicted using the SCS Curve Number methodology. This methodology is geared to large storms. Field data indicate that the procedure may under-estimate runoff volumes from pervious surfaces in small storms (Pitt, 1987). This effect is relatively small and partially compensates for over-prediction of runoff volumes from impervious areas.
- (10) Tests of alternative model formulations for typical urban watersheds and BMP designs indicates that the current version of the model will lead to conservative BMP designs because the overprediction in impervious runoff tends to exceed the underprediction in pervious runoff. These limitations are not serious enough to warrant modifying the model structure and expanding input data requirements for this version of the model. They should be considered, however, in calibrating/testing the model against measured hydrographs from urban watersheds. In such cases, adjusting the impervious fraction to represent an "effective impervious fraction" may be necessary in order to achieve calibration.
- (11) The calibration of particle buildup/washoff parameters to predict the NURP median, event-mean runoff TSS concentration is based simulation of Providence 1983-1987 rainfall. Since buildup/washoff processes are intensity-dependent and volume-dependent, recalibration may be necessary to predict NURP TSS levels using rainfall data from other regions. This would involve rescaling particle accumulation rates and pervious runoff concentrations (Procedure = 'Case Edit Particles') to predict the NURP median TSS concentration (100 ppm) for a given rainfall period. Alternatively, the 'Scale Factors' on the component input screens ('Procedure = 'Case Edit Components') can be adjusted. Recalibration may be necessary if "absolute" predictions (concentrations, loads) are desired for rainfall patterns which are significantly different from Providence rainfall patterns. Recalibration should not be necessary if the model is being used only for "relative" predictions (removal efficiencies).

- (12) The emphasis of NURP data in the initial calibration of the model does not imply that other sources of data on runoff quality are unimportant or should be ignored. High site-to-site variability in urban runoff quality dictates that actual runoff quality will rarely equal that predicted using the default calibration. Calibration of the model to local runoff data should be considered, particularly in cases where absolute predictions (concentrations, loads) are emphasized over relative predictions (removal efficiency).

Following are the major limitations associated with device simulations:

- (1) No backwater effects. These may be important in linking devices (e.g., series of wet ponds with small downstream changes in elevation). Backwater conditions may cause the model to underestimate or to over-estimate removal efficiencies, depending upon the device linkage. Over-estimation would occur, for example, if a backwater condition causes a device to overflow into a receiving water instead of discharging to a downstream device.
- (2) Devices are assumed to be completely-mixed. Effects of plug flow can be simulated by splitting one device into two or more consecutive devices. Driscoll (1986) notes, however, that performance of wet ponds is relatively insensitive to geometry (plug flow vs. completely mixed conditions) because most of the particle removal occurs under quiescent conditions.
- (3) Ideal sheet flow is assumed for swales and buffers (Type = 3). Potential effects of channelization must be considered by the user in interpreting output. Although the use of Manning's equation is generally accepted for swales and buffers (McCuen, 1982; Wanieliesta and Youseff, 1986), the model has not been tested against observed performance data or against other methodologies for such devices.
- (4) Particle resuspension is not simulated. Maximum simulated velocities in buffers and swales are tabulated for comparison with independent scouring criteria (typically ~4 ft/sec, RIDEM, 1988). Scouring of recently settled particles may occur at lower flow velocities, however, leading to overall removal efficiencies which are lower than those predicted by the model, particularly in swales and dry ponds. High maintenance frequencies (sediment removal) may be required to achieve the removal efficiencies predicted by the model for such devices, particularly when the predominant removal mechanism is settling (vs. infiltration).
- (5) Particle interactions (flocculation) are not directly simulated, except insofar as NURP settling velocities (measured) reflect such processes. Regional calibration of particle settling velocity distributions may be appropriate.
- (6) Chemical and biological mechanisms responsible for contaminant removal in devices are not considered in the default particle calibrations. Possibilities for modifying P8 calibrations and/or

structure to account for these mechanisms should be explored in future work.

- (7) Engineering aspects of BMP design (e.g., length/width ratio, avoiding short circuiting, side slope stability, aquatic benches) are not considered in the model. The model provides perspectives on BMP scales only. It is assumed that devices are otherwise engineered correctly (Schueler, 1987; Stahre and Urbonas, 1990).
- (8) The model does not account for precipitation and evaporation directly to and from devices. Since devices generally occupy a small portion of the contributing watershed, this is usually not a problem. Rainfall onto devices can be considered by accounting for device areas when specifying watershed characteristics.

Future refinements to the model should address the above limitations. Further testing and refinement of the preliminary calibrations using regional runoff monitoring data are recommended. Although there is room for refinement in treatment criteria, the 70%/85% TSS removal objectives recommended by RIDEM(1988) are reasonable with respect to water quality protection and achievability.

REFERENCES

- Alley, W.M. and P.E. Smith, "Estimation of Accumulation Parameters for Urban Runoff Quality Modeling", Water Resources Research, Vol. 17, No. 6, pp. 1657-1664, December 1981.
- Alley, W.M. and P.E. Smith, "Multi-Event Urban Runoff Quality Model", U.S. Geological Survey, Open File Report 82-764, 1982.
- Athayede, D.N. et al, "Results of the Nationwide Urban Runoff Program, Volume I - Final Report", U.S. Environmental Protection Agency, Water Planning Div., Washington, NTIS PB84-185552, Dec 1983.
- Cole, R.H., R.E. Frederick, R.P. Healy, R.G. Rolan, "NURP Priority Pollutant Monitoring Project: Summary of Findings", prepared for U.S. Environmental Protection Agency, Office of Water Regulations and Standards, Monitoring and Data Support Division, Washington, NTIS PB84-175686, December 1983.
- Bedient, P.B. and W.C. Huber, Hydrology and Floodplain Analysis, Addison-Wesley, 1988.
- Burden, R.L., J.D. Faires, A.C. Reynolds, Numerical Analysis, Prindle, Weber, & Schmidt, Boston, Second Edition, 1981.
- Davies, P.H., "Toxicology and Chemistry of Metals in Urban Runoff", in B. Urbonas and L.A. Roesner, Urban Runoff Quality - Impact and Quality Enhancement Technology, American Society of Civil Engineers, pp. 60-78, 1986.
- Donigian, A.S., Jr., J.C. Imhoff, B. Biknell, and J.L. Kittle, Jr., "Guide to the Application of the Hydrologic Simulation Program - FORTRAN (HSPF)", U.S. Environmental Protection Agency, Athens Environmental Research Laboratory, EPA-600/3-84-065, 1984.
- Driscoll, E.D., "Performance of Detention Basins for Control of Urban Runoff Quality", presented at International Symposium on Urban Hydrology, Hydraulics, and Sediment Control, University of Kentucky, July 1983.
- Driscoll, E.D., "Detention and Retention Controls for Urban Runoff", in B. Urbonas and L.A. Roesner, Urban Runoff Quality - Impact and Quality Enhancement Technology, American Society of Civil Engineers, pp. 381-393, 1986.
- Grizzard, T.J., C.W. Randall, B.L. Weand, K.L. Ellis, "Effectiveness of Extended Detention Ponds", in B. Urbonas and L.A. Roesner, Urban Runoff Quality - Impact and Quality Enhancement Technology, American Society of Civil Engineers, pp. 323-337, 1986.
- Hamon, W.R., "Estimating Potential Evapotranspiration", Proceedings of the American Society of Civil Engineers, Journal of the Hydraulics Division, Vol. 87, NO HY3, pp. 107-120, 1961.

Haith, D.A. and L.L. Schoemaker, "Generalized Watershed Loading Functions for Stream Flow Nutrients", Water Resources Bulletin, American Water Resources Association, Vol. 23, No. 3, pp. 471-48, June 1987.

Hoffman, E.J., "Urban Runoff Pollutant Inputs to Narragansett Bay: Comparison to Point Sources", EPA 440/5-85-001, pp. 159-164, 1985.

Huber, W.C., "Modeling Urban Runoff Quality: State-of-the-Art", in Urbonas, B. and L.A. Roesner, eds., Urban Runoff Quality - Impact and Quality Enhancement Technology, Proceedings of an Engineering Foundation Conference, Henniker, New Hampshire, ASCE Publications, New York, pp.34-48, 1986.

Huber, W.C. and R.E. Dickinson, "Storm Water Management Model, Version 4: User'S Manual", Environmental Research Laboratory, USEPA, Athens, Georgia, August 1988.

Lawrence, I., "Source and Fate of Urban Runoff Constituents and Their Management", Proc. of 12th Symposium on Stormwater Quality in Urban Areas, Water Research Foundation of Australia, University of Woollongong, July 1986.

Mancini, J.L. and A.H. Plummer, "Urban Runoff and Quality Criteria", in Urbonas, B. and L.A. Roesner, eds., Urban Runoff Quality - Impact and Quality Enhancement Technology, Proceedings of an Engineering Foundation Conference, Henniker, New Hampshire, ASCE Publications, New York, pp. 133-149, 1986.

Nightingale, H.I., "Water Quality Beneath Urban Runoff Water Management Basins", Water Resources Bulletin, Vol. 23, No. 2, pp. 197-203, April 1987.

Nightingale, H.I., "Accumulation of As, Ni, Cu, and PB in Retention and Recharge Basins Soils from Urban Runoff", Water Resources Bulletin, Vol. 23, No. 4, pp. 663-668, August 1987.

Oberts, G.L., P. J. Wotzka, J.A. Hartsoe, "The Water Quality Performance of Select Urban Runoff Treatment Systems", Part One of a Report to the Legislative Commission on Minnesota Resources, Metropolitan Council, St. Paul, Minnesota, Publication No. 590-89-062a, June 1989.

Phillips, B.C. and A.G. Goyen, "Guidelines for Improving Urban Stormwater Quality Using Water Quality Control Structures", Proc. Seminar on Urban Runoff Water Quality, I.E. Australia/ A.W.W.A., Sydney, 12 July 1987.

Pitt, R.E., "Small Storm Urban Flow and Particulate Washoff Contributions to Outfall Discharges", Ph.D. Thesis, University of Wisconsin, University Microfilms 8800379, 1987.

Pitt, R.E. and K.W. Potter, "General Urban Runoff Model for Water Quality Investigations: 1) Development and Comparisons", Unpublished Manuscript, 1990.

Rhode Island Department of Environmental Management, "Recommendations of the Stormwater Management and Control Committee Regarding the Development and Implementation of Technical Guidelines for Stormwater Management", Office of Environmental Coordination, June 1988.

Sartor, J.D., G.B. Boyd, and F.J. Agardy, "Water Pollution Aspects of Street Surface Contaminants", Journal of the Water Pollution Control Federation, Volume 46, No. 3, pp. 458-0467, March 1974.

Schiffer, D.M., "Effects of Three Highway-Runoff Detention Methods on Water Quality of the Surficial Aquifer System in Central Florida", U.S. Geological Survey, Water Resources Investigation Report 88-4170, 1988.

Schueler, T.R., "Controlling Urban Runoff: A Practical Manual for Planning and Designing Urban BMP'S, Metro. Washington Council of Gov., July 1987.

Stahre, P. and B. Urbonas, Storm-Water Detention for Drainage, Water Quality, and CSO Management, Prentice Hall, New Jersey, 1990.

U.S. Department of Agriculture, Soil Conservation Service, "National Engineering Handbook. Section 4. Hydrology." 1964.

U.S. Department of Agriculture, Soil Conservation Service, "Guidelines for Soil & Water Conservation in Urbanizing Areas of Massachusetts", Amherst, MA, October, 1977.

U.S. Department of Agriculture, Soil Conservation Service, "Urban Hydrology for Small Watersheds - Technical Release Number 55", Engineering Division, May 1985.

U.S. Environmental Protection Agency, "Methodology for Analysis of Detention Basins for Control of Urban Runoff Quality", Nonpoint Source Branch, Washington, EPA 440/5-87-001, September 1986.

U.S. Geological Survey, "Water Resources Data for Massachusetts and Rhode Island - Water Year 1977", Water-Data Report MA-RI-77-1, 1977.

Walesh, S.G., "Case Studies of Need-Based Quality-Quantity Control Projects", in B. Urbonas and L.A. Roesner, Urban Runoff Quality - Impact and Quality Enhancement Technology, American Society of Civil Engineers, pp. 423-437, 1986.

Walker, W.W., "Land Use - Nutrient Export Relationships in the Northeast", prepared for Meta Systems, Inc. and New Haven Water Company, June 1978.

Walker, W.W., "A Sensitivity and Error Analysis Framework for Lake Eutrophication Modeling", Water Resources Bulletin, American Water Resources Association, Vol. 18, No. 1, pp. 53-61, February 1982.

Walker, W.W., "Empirical Methods for Predicting Eutrophication in Impoundments - Report 3 - Model Refinements", prepared for Chief of Engineers, U.S. Army, Technical Report E-81-9, U.S.A.E. Waterways Experiment Station, Vicksburg, Mississippi, March 1985.



Walker, W.W., "Phosphorus Removal by Urban Runoff Detention Basins", Lake and Reservoir Management, Volume III, North American Lake Management Society, pp. 314-326, 1987.

Wanielista, M. P. and Y.A. Yousef, "Best Management Practices", in Urbonas, B. and L.A. Roesner, eds., Urban Runoff Quality - Impact and Quality Enhancement Technology, Proceedings of an Engineering Foundation Conference, Henniker, NH, ASCE Publications, New York, pp.314-322, 1986.  
Whipple, W. and J.V. Hunter, "Settleability of Urban Runoff Pollution", Journal of the Water Pollution Control Federation, Vol. 53, No. 12, pp. 1726-1731, December 1981.

Wigington, P.J., C.W. Randall, and T.J. Grizzard, "Accumulation of Selected Trace Metals in Soils of Urban Runoff Swale Drains", Water Resources Bulletin, Vol. 22, no. 1, pp. 73-80, February 1986.

Yousef, Y.A., M.P. Wanielista, and H.H. Harper, "Design and Effectiveness of Urban Retention Basins", in B. Urbonas and L.A. Roesner, Urban Runoff Quality - Impact and Quality Enhancement Technology, American Society of Civil Engineers, pp. 338-350, 1986.

**APPENDIX A**  
**P8 Menu Structure**

PROCEDURE	DESCRIPTION	HELP MODE	
Case	Define Case	180	0
Edit	Edit Case Variables	180	0
First	Edit Title, Data File Names, Storm File Names, Storm Dates	5	0
Devices	Edit Device Index or Data	70	0
Index	Edit Device Index (Device Labels & Types)	9	0
Data	Edit Device Data (Dimensions, Infiltration Rates, Slopes, etc.)	10	0
Watersheds	Edit Watershed Index or Data	40	0
Index	Edit Watershed Index (Watershed Labels & Outflow Devices)	7	0
Data	Edit Watershed Data (Area, Imperv. Frac., Curve Number, etc.)	8	0
Particles	Edit Particle Data (Runoff Conc., Settling Veloc., etc.)	4	1
Components	Edit Water Quality Components & Criteria	17	1
First	Edit First Group (Components 1 - 5)	17	1
Second	Edit Second Group (Components 6 - 10)	17	1
Evapotrans	Edit Evapotranspiration Factors	98	1
TimeSteps	Edit Time Step Lengths & Continuity Error Limit	18	1
All	Edit All Site Input Data Groups	19	0
Read	Read Input Data File	20	0
All	Read All Input Data Groups from a Disk File	20	0
Particles	Read Particle/Component Input Data Groups from Disk File	20	0
Save	Save Input Data File	22	0
Inputs	Save all Input Data Groups in a Disk File	22	0
Particles	Save Particle/Component Input Groups in a Disk File	22	1
Archive	Save All Input Data Groups and Output Files	22	1
Zero	Erase All Case Input Values	24	0
List	List Input Values for Current Case	1	0
Site	List Watershed & Device Input Data	1	0
Network	List Watershed / Device Network	1	0
Tables	List Device Morphometry & Outflow vs. Elevation Tables	33	0
Parameters	List Particle & Water Quality Component Input Data	1	0
Run	Run Model or Size Devices	180	0
Model	Run Model for Current Watershed/Device Network	25	0
Design	Select / Size Devices for Defined Watershed(s)	77	0
Lookup	Retrieve Preliminary Designs for One Device	78	0
70%	Retrieve a Device to Achieve TSS Removal = 70%	78	0
85%	Retrieve a Device to Achieve TSS Removal = 85%	78	0
Tune	Rescale Device(s) to Achieve Target Removal Efficiency	79	0
One	Target Removal Efficiency for One Device	79	0
All	Target Removal Efficiency for Entire Device Network	79	0
Sensitivity	Run Sensitivity Analysis on Model Input Variables	89	1
Watersheds	Run Sensitivity Analysis on Watershed Input Variables	89	1
Devices	Run Sensitivity Analysis on Device Input Variables	89	1
Both	Run Sensitivity Analysis on Watershed & Device Inputs	89	1
Particles	Run Sensitivity Analysis on Particle Parameters	89	1
All	Run Sensitivity Analysis on All Input Variables	89	1
Calibrate	Run Flow Calibration - Compare Observed & Predicted Flows	97	1
List	List Model Output (Must Run Model First)	23	0
Balances	Water & Mass Balances by Device & Component	27	0
All	Water & Mass Balances for All Storms	27	0
Each	Water & Mass Balances for Each Storm Separately	27	1
Removals	List Removal Efficiencies (%) by Device & Component	29	0
Terms	List/Plot Flow & Mass-Balance Terms by Device & Component	90	0
Outflow	List/Plot Device Total Outflows (Infilt.+Normal+Spillway)	90	0
Surface	List/Plot Device Surface Outflows (Normal + Spillway)	90	0
Inflow	List/Plot Device Total Inflows	90	0
Any	List/Plot Any Mass-Balance Term	90	0
Violations	Violation Frequencies for Event-Mean Concentrations	28	1
Outflow	Violation Frequencies for Total Outflow Concentrations	28	1
Surface	Violation Frequencies for Surface Outflow Concentrations	28	1
Inflow	Violation Frequencies for Total Inflow Concentrations	28	1
Any	Violation Frequencies for Any Mass-Balance Term	28	1
Peaks	List Maximum Elevations, Outflows, and Velocities by Device	81	0
Sedim	List Sediment Accumulation Rates by Device	37	0
Means	List Flow-Weighted-Mean Concentrations Device & Component	21	1
Inflow	List Flow-Weighted-Mean Inflow Concentrations	21	1
Outflow	List Flow-Weighted-Mean Total Outflow Concentrations	21	1
Surface	List Flow-Weighted-Mean Surface Outflow Concentrations	21	1
Any	List Flow-Weighted-Mean Concs for Any Mass-Balance Term	21	1

P8 Menu Structure (ct.)

PROCEDURE	DESCRIPTION	HELP	MODE
Detail	Detailed Statistical Summaries of Simulation Results	30	1
Flows	Summarize Event-Total Flows (acre-ft)	30	1
Loads	Summarize Event-Mean Loads (lbs)	30	1
Concs	Summarize Event-Mean Concentrations (ppm)	30	1
Precip	Summarize Event-Mean Precipitation (inches)	30	1
Traced	Detailed Output Statistics by Time Step for Traced Devices	31	1
Continuity	List Continuity (Water-Balance & Mass-Balance) Errors	32	1
Plot	Plot Simulation Results (Must Run Model First)	188	1
Events	Plot Event Summary Values	71	1
Timeser	Plot Event Time Series	71	1
Volumes	Plot Event Total Flow Volume (ac-ft) vs. Time (Julian Day)	71	1
Loads	Plot Event Total Loads (lbs) vs. Time (Julian Day)	71	1
Concs	Plot Event Mean Concentrations (ppm) vs. Time (Julian Day)	71	1
Precip	Plot Event Total Precipitation (inches) vs. Time (Julian Day)	71	1
Elev	Plot Event Maximum Elevations (ft) vs. Time (Julian Day)	71	1
Flows	Plot Event Maximum Flows (cfs) vs. Time (Julian Day)	71	1
Other	Plot Other Storm Values vs. Time (Julian Day)	71	1
Cumulatives	Plot Event Cumulative Totals vs. Time (Julian Day)	72	1
Flows	Plot Cumulative Flows (ac-ft) vs. Time (Julian Day)	72	1
Loads	Plot Cumulative Loads (lbs) vs. Time (Julian Day)	72	1
Precip	Plot Cumulative Precip. (inches) vs. Time (Julian Day)	72	1
Frequency	Plot Cumulative Frequency Distributions of Event Values	73	1
LogNormal	Plot Frequency Distributions of Event Values - Lognormal Scale	74	1
Scatter	Scatter Plots for Event-Mean Values	75	1
1CvsQ	Plot Event-Mean Concentration (ppm) vs. Event-Mean Flow (cfs)	75	1
2CvsP	Plot Event-Mean Concentration (ppm) vs. Event Total Precip (in)	75	1
3CvsI	Plot Event-Mean Concentration (ppm) vs. Precip Intens (in/hr)	75	1
4Other	Scatter Plot of Other Variables	75	1
Yearly	Plot Yearly Total Flows, Loads, or Precip. vs. Year	99	1
Flows	Plot Yearly Total Flows (ac-ft) vs. Year	99	1
Loads	Plot Yearly Total Loads (lbs) vs. Year	99	1
Precip	Plot Yearly Total Precipitation (inches) vs. Year	99	1
Monthly	Plot Monthly Total Flows, Loads, or Precip. vs. Date	99	1
Flows	Plot Monthly Total Flows (ac-ft) vs. Date	99	1
Loads	Plot Monthly Total Loads (lbs) vs. Date	99	1
Precip	Plot Monthly Total Precipitation (inches) vs. Date	99	1
Daily	Plot Daily-Average Time Series - for Traced Devices Only	34	1
Precip	Plot Daily Avg. Precipitation Intensity (in/hr) vs. Julian Day	34	1
Elevations	Plot Daily Avg. Device Elevations (ft) vs. Julian Day	34	1
Volumes	Plot Daily Avg. Storage Volumes (ac-ft) vs. Julian Day	34	1
Flows	Plot Daily Average Surface Outflows (cfs) vs. Julian Day	34	1
Traced	Plot Time-Step Results for Traced Devices	36	1
Precip	Plot Precipitation Intensity (in/hr) vs. Julian Hours	36	1
Elevations	Plot Device Elevations (ft) vs. Julian Hours	36	1
Volumes	Plot Device Storage Volumes (ac-ft) vs. Julian Hours	36	1
Flows	Plot Device Surface Outflows (cfs) vs. Julian Hours	36	1
Concs	Plot Surface Outflow Concentrations (ppm) vs. Julian Hours	36	1
Loads	Plot Surface Outflow Loads (lbs/hr) vs. Julian Hours	36	1
Utilities	Program Utilities	180	1
Output	Select Destination for Program Output	194	1
Screen	Send Output to Screen (Default)	194	1
File	Send Output to Disk File	194	1
Trace	Select Devices to be Traced - Save Time-Step Results	38	1
Some	Trace Simulation Results for Specific Devices	38	1
None	Do Not Trace Results (Default)	38	1
All	Trace All Devices ( Careful !! - Ample Disk Space Required )	38	1
View	View any DOS Text/ASCII File	186	1
NOAA	Translate NOAA/NCDC Hourly Precipitation File	43	1
Batch	Batch Processing - Run Model for List of Cases	76	1
NoArchive	Batch - Do Not Archive Results	76	1
Archive	Batch - Archive Results - Save Output for Future Analysis	76	1
Help	View Supplementary Help Screens	195	0
Quit	End Session	180	0

USER MODES <SHIFT><F1>: 0=NOVICE, 1=ADVANCED, HELP: Screen Numbers Listed in Appendix D

## APPENDIX B

### Data Entry Screens

- B-1 Case Title and Data File Names
- B-2 Watershed Index
- B-3 Watershed Data
- B-4 Device Index
- B-5 Device Data - Type=1 - Detention Pond
- B-6 Device Data - Type=2 - Infiltration Basin
- B-7 Device Data - Type=3 - Swale/Buffer Strip
- B-8 Device Data - Type=4 - Generalized Device
- B-9 Device Data - Type=5 - Pipe/Manhole
- B-10 Device Data - Type=6 - Splitter
- B-11 Device Data - Type=7 - Aquifer
- B-12 Evapotranspiration Parameters
- B-13 Simulation Time Steps \*
- B-14 Particle Characteristics \*
- B-15 Water Quality Components \*
- B-16 Translate NOAA/NCDC Precipitation Files \*
- B-17 Misc. Help Screens for Site Parameter Estimation

\* Accessed from ADVANCED USER MODE only

PB URBAN CATCHMENT MODEL	
CASE TITLE	<b>Emerald Square Mall Upper Wtshd</b>
CASE DATA FILE	<b>ESM1.DTCAS</b>
STORM DATA FILE	<b>PRO087.SFM</b>
STORM VOLUME FACTOR	<b>1</b> DURATION FACTOR <b>1</b>
PASSES THRU STORM FILE	<b>1</b>
START DATE <YYMMDD>	<b>870101</b> KEEP DATE <b>870202</b> STOP DATE <b>870601</b>
Notes:	<b>emerald square mall</b>
Notes:	<b>upper watershed</b>
Notes:	<b>h.attleboro, ma</b>
Notes:	<b>detention pond followed by 3</b>
Notes:	<b>wetland basins in series</b>
Notes:	<b>wetlands modeled as shallow</b>
Notes:	<b>detention ponds</b>

**case title**

**F1=HELP, F2=DONE/SAVE, F3=EDIT FIELD, F7=HELP/EDITOR, <ESC>=ABORT**

### 'Case Edit First'

TITLE is used to label output tables and graphs. CASE FILE is used to store input values for future use. STORM FILE contains storms to be simulated.

STORM VOLUME FACTOR is multiplied by precipitation values in STORM FILE during simulation (normally = 1). This can be used to rescale storm sequences stored on disk. For example, 'TYPE2.SFM' defines a 1-inch, 24-hr storm with SCS TYPE II distribution. To run a 2-inch storm using this file, set PRECIP VOLUME FACTOR = 2. The STORM DURATION FACTOR modifies storm storm duration without changing total volume or total interval.

To flush out initial conditions, STORM FILE can be read more than once. Results are kept only on the last PASS through the file.

The simulation begins on the first storm occurring on or after the specified START DATE (=0 to start with first storm in file). Results are kept only after the specified KEEP DATE (=0 to start immediately). Simulation stops on the specified STOP DATE (=0 to stop at end of file).

NOTES are for user reference.

WATERSHED INDEX								
NO	LABEL	OUTFLOW DEVICE	NO	LABEL	OUTFLOW DEVICE	NO	LABEL	OUTFLOW DEVICE
1	upr mall	0	9		0	17		0
2		0	10		0	18		0
3		0	11		0	19		0
4		0	12		0	20		0
5		0	13		0	21		0
6		0	14		0	22		0
7		0	15		0	23		0
8		0	16		0	24		0

### Watershed label

F1=HELP, F2=DONE/SAVE, F3=EDIT FIELD, F7=HELP/EDITOR, <ESC>=ABORT

#### 'Case Edit Watersheds Index'

Define list of watersheds to be simulated.

LABEL is an 8-character watershed identifier for user reference.

Surface runoff from the watershed is routed to the specified OUTFLOW DEVICE.

The OUTFLOW DEVICE must be referenced in the DEVICE INDEX.

If the DEVICE = 0 or is not referenced in the DEVICE INDEX, the watershed is ignored.

Watersheds do not have to be numbered consecutively.

To add or remove a watershed, you must use this screen. The watershed must be indexed before data (area, etc.) can be entered.

WATERSHED DATA			
WATERSHED NUMBER		1	
WATERSHED LABEL		<b>upr mall</b>	
OUTFLOW DEVICE NUMBER		<input type="checkbox"/>	← for surface runoff
AQUIFER DEVICE NUMBER		<input type="checkbox"/>	← for percolation
TOTAL AREA	acres	11.5	
IMPERVIOUS FRACTION	-	88	
DEPRESSION STORAGE	inches	82	
SWEEPING FREQUENCY	1/week	8	
PERVIOUS CURVE NUMBER	-	88	
SCALE FACTOR FOR POLLUTANT LOADS		<input type="checkbox"/>	

**watershed label**

F1=HELP, F2=DONE/SAVE, F3=EDIT FIELD, F7=HELP/EDITOR, <ESC>=ABORT

'Case Edit Watersheds Data'

OUTFLOW DEVICE NUMBER - routes runoff from current watershed to a specified treatment device, as defined in the DEVICE INDEX. (0 = receiving water).

AQUIFER DEVICE NUMBER - routes percolation from pervious watershed area to an AQUIFER (DEVICE TYPE = 7). Routing of percolation to an AQUIFER is necessary only if prediction of BASEFLOW is desired (e.g., large watersheds).

Set=0 to ignore baseflow (does not influence computation of surface runoff).

If a nonzero device number is specified, the referenced device must be an AQUIFER (TYPE=7), or an error message will be issued.

DEPRESSION STORAGE & SWEEPING FREQUENCY refer to impervious portion of watershed only.

CURVE NUMBER refers to PERVIOUS portion of site only.

SCALE FACTOR FOR POLLUTANT LOADS modifies loads computed based upon other particle & watershed characteristics (Normally = 1).

To access this screen, the watershed must be defined in the WATERSHED INDEX.

DEVICE INDEX								
NUMBER	LABEL	TYPE	NUMBER	LABEL	TYPE	NUMBER	LABEL	TYPE
1	inflow	5	9		0	17		0
2	pond	1	10		0	18		0
3	detland	1	11		0	19		0
4	detland	1	12		0	20		0
5	detland	1	13		0	21		0
6		0	14		0	22		0
7		0	15		0	23		0
8		0	16		0	24		0

TYPES: 1=DETENTION POND 2=INFILTRATION BASIN 3=SWALE/BUFFER  
 4=GENERAL 5=PIPE/MANHOLE 6=SPLITTER  
 7=AQUIFER

device 1 label

F1=HELP, F2=DONE/SAVE, F3=EDIT FIELD, F7=HELP/EDITOR, <ESC>=ABORT

### 'Case Edit Devices Index'

Define List of Devices to be Simulated.

LABEL is an 8-character device identifier for user reference.

DEVICE TYPE should be one of the following:

- 1 - Detention Pond (Wet, Dry, Extended)
  - 2 - Infiltration Basin (Storage Area with Infiltration)
  - 3 - Swale or Buffer Strip (Driven by Manning's Equation)
  - 4 - General Device (Enter Elev/Area/Outflow Table)
  - 5 - Pipe / Manhole (Collects Watershed and/or Device Outflow)
  - 6 - Flow Splitter (" ", Conditional Routing Based on Elev.)
  - 7 - Aquifer (Collects Percolation, Infiltration)
- other - device is ignored

Device numbers can be specified in any order, as long as a definite downstream order exists (i.e., no feedback loops). Program checks for illegal networks.

This screen must be used to add a device, to remove a device, or to change a DEVICE TYPE.



DETENTION POND			
DEVICE NO.	2	LABEL	pond
		BOTTOM ELEV	feet 0
		SURFACE AREA (acres)	0
		STORAGE VOLUME (ac-ft)	0
		INFILTRATION RATE (in/hr)	0
POND BOTTOM	0		
PERMANENT POOL	0	0	0
FLOOD POOL	0	0	0
NORMAL OUTLET - DRAINS FLOOD POOL - SPECIFY ONLY ONE TYPE:			
ORIFICE DIAMETER	inches	0	ORIF DISCHARGE COEF 0
WEIR LENGTH	feet	0	WEIR DISCHARGE COEF 0
RISER HEIGHT	ft	0	HOLES 0
			HOLE DIAMETER inches 0
FLOOD POOL DRAWDOWN TIME	hours	0	
PARTICLE REMOVAL SCALE FACTOR:			~1.0
OUTFLOW DEVICE NO'S:	INFILTR	NORMAL	OVERFLOW

device label

F1=HELP, F2=DONE/SAVE, F3=EDIT FIELD, F7=HELP/EDITOR, <ESC>=ABORT

'Case Edit Devices Data' - Detention Pond (TYPE = 1)

Define characteristics of BOTTOM, PERMANENT POOL, and FLOOD POOL.  
The BOTTOM ELEVATION is for user reference only, unless the device's pool elevation drives a FLOW SPLITTER.

If the POND has a FLOOD POOL, the NORMAL OUTLET must be defined using one of four options:

- 1 - ORIFICE DIAMETER (for pipes, culverts) and DISCHARGE COEF (~.6)\*
- 2 - WEIR LENGTH and WEIR DISCHARGE COEFFICIENT (~3.3)\*
- 3 - RISER HEIGHT, HOLES, HOLE DIAM. - perforated riser, holes equally spaced  
ORIFICE DISCHARGE COEFFICIENT also applies to RISER HOLES
- 4 - FLOOD POOL DRAWDOWN TIME is time required for pond to drain from full FLOOD POOL to PERMANENT POOL through the NORMAL OUTLET.  
Shape of drawdown curve is similar to that obtained for a weir.

\* English units, see Bedient & Huber(1988), p.371 or press <F8> for more help

The NORMAL OUTLET is at the top of the PERMANENT POOL. The SPILLWAY is at the top of the FLOOD POOL. Set OUTFLOW DEVICE NUMBERS to '0' to direct flow out of system, or to other indexed DEVICES.

INFILTRATION BASIN		
DEVICE NUMBER	9	LABEL <b>infil</b>
BOTTOM ELEVATION	feet	0
BOTTOM AREA	acres	18216
STORAGE POOL AREA	acres	362437 > bottom area
STORAGE POOL VOLUME	acre-ft	10073
VOID VOLUME PERCENT	%	100
INFILTRATION RATE	inches/hour	5
PARTICLE REMOVAL SCALE FACTOR		1 ~1.0
OUTFLOW DEVICE NUMBERS:		
OVERFLOW		0
EXFILTRATE		0

**device label**

F1=HELP, F2=DONE/SAVE, F3=EDIT FIELD, F7=HELP/EDITOR, <ESC>=ABORT

'Case Edit Devices Data' - Infiltration Basin (TYPE = 2)

The BOTTOM ELEVATION is for user reference only, unless the device's pool elevation drives a FLOW SPLITTER (type=6), used to simulate offline basin.

STORAGE POOL AREA must be greater than BOTTOM AREA.

VOID VOLUME % = normally = 100%. Some designs (e.g., trenches) include filling storage volume with coarse stones (Schueler, 1987). Adjust input accordingly.

INFILTRATION RATE refers to saturated soil conditions (minimum value). OVERFLOW outlet is used when the STORAGE POOL is full.

To specify an offline infiltration basin (inflow stops when pool is full), place a FLOW SPLITTER upstream of the basin, referenced to the STORAGE POOL elevation of the infiltration basin.

OUTFLOW DEVICE NOS for the EXFILTRATE and OVERFLOW refer to other devices. Set OUTFLOW DEVICE NUMBERS to '0' to direct flow out of system (to groundwater in case of EXFILTRATE). EXFILTRATE can also be routed to an AQUIFER DEVICE (TYPE=?), if groundwater & baseflow simulations are desired.

SWALE/BUFFER STRIP		
DEVICE NUMBER	17	LABEL <b>buffer</b>
BOTTOM ELEVATION	feet	0
FLOW PATH LENGTH	feet	101.250
FLOW PATH SLOPE	%	2
BOTTOM WIDTH	feet	100
SIDE SLOPE	ft-h/ft-v	10
MAXIMUM DEPTH	feet	5
MANNING'S N		0.4
INFILTRATION RATE	in/hr	0.5
PARTICLE REMOVAL SCALE FACTOR		1.0
OUTFLOW DEVICE NUMBERS:		
NORMAL OUTLET	0	EXFILTRATE

**device label**

F1=HELP, F2=DONE/SAVE, F3=EDIT FIELD, F7=HELP/EDITOR, <ESC>=ABORT

'Case Edit Devices Data' - Swale/Buffer (TYPE = 3)

BOTTOM ELEVATION refers to outlet invert. This is for user's reference only, unless device's elevation drives a FLOW SPLITTER.

Elevation/Area/Discharge table is estimated by applying Manning's equation to a trapezoidal swale. A buffer strip can be represented as a wide swale.

The model assumes overland sheet flow (NO CHANNELIZATION). Adjust input WIDTH & LENGTH to reflect area conforming to this assumption.

MAXIMUM DEPTH refers to maximum depth at which Manning's equation applies. This should not exceed vegetation depth for grassed areas. Water surface elevation is constrained to this depth.

INFILTRATION RATE refers to saturated conditions.

OUTFLOW DEVICE NUMBERS for the NORMAL OUTLET and EXFILTRATE refer to other devices. Set OUTFLOW DEVICE NUMBERS to '0' to direct flow out of system (to groundwater in case of EXFILTRATE). EXFILTRATE can also be routed to an AQUIFER DEVICE (TYPE=7), if groundwater flow and mass-balances are desired.

GENERALIZED DEVICE				
DEVICE NO 2		DEVICE NAME basin		
PARTICLE REMOVAL SCALE FACTOR		1		
OUTLETS-->		INFILTR.	NORMAL	SPILLWAY
OUTFLOW DEVICE NUMBERS-->		0	0	0
ELEV(ft)	AREA(acres)	OUTFLOW RATES(cfs)		
184.000	021131	0	0	0
184.001	021131	021307	0	0
184.413	026418	026638	0	0
184.812	031705	031969	0	0
185.213	036992	037300	0	0
185.614	042279	042631	0	0
186.015	047565	047962	0	0
186.416	052852	053293	0	0
186.817	058139	058624	0	0
187.218	063426	063954	0	0
187.619	068713	069285	0	0
188.021	074	074616	0	0

Device label

F1=HELP, F2=DONE/SAVE, F3=EDIT FIELD, F7=HELP/EDITOR, <ESC>=ABORT

'Case Edit Device Data' - General Device (TYPE = 4)

Defines elevation, area, discharge table for device with up to three outlets, labeled EXFILTRATE, NORMAL OUTLET, SPILLWAY. Similar input is required for hydrologic models (e.g., TR-20).

ELEVATION can be referenced to an arbitrary datum, unless device drives a FLOW SPLITTER. ELEVATION values must be entered in increasing order. Blank rows at bottom of table are ignored.

AREA & DISCHARGE must also be specified in increasing order. The SPILLWAY is automatically activated when the water elevation reaches the maximum value specified in this table.

Prior to simulation, a similar elevation/area/discharge table is generated for DEVICE TYPES 1, 2, and 3, based upon input values.

OUTFLOW DEVICE NUMBERS refer to other devices. Set OUTFLOW DEVICE NUMBERS to '0' to route flow out of system (to groundwater in case of EXFILTRATE). EXFILTRATE can also be routed to an AQUIFER DEVICE (TYPE=7), if groundwater flow and mass-balances are desired.

PIPE/MANHOLE	
DEVICE NUMBER	1
DEVICE LABEL	inflow
TIME OF CONCENTRATION (hrs)	██████████
OUTFLOW DEVICE NUMBER	███

### device label

F1=HELP, F2=DONE/SAVE, F3=EDIT FIELD, F7=HELP/EDITOR, <ESC>=ABORT

#### 'Case Edit Device Data' - Pipe (TYPE = 5)

Can be used to collect outflows from a number of watersheds and/or devices and discharge them to a specific device (or out of system) without change. This is analogous to the SWMM 'Manhole' (Dickinson & Huber, 1988)

To obtain graphic or statistical output for one or more watersheds, direct their outflows to a PIPE.

A PIPE is modeled as a linear reservoir with a given TIME OF CONCENTRATION (hrs) (See Bedient and Huber (1988), p. 378-3). For TOC=0, the device outflow responds immediately to inflows. Higher values will stretch the response out over longer times, while preserving water & mass balances. The magnitude of the peak flow is reduced, but the time of peak flow is not changed. Use this to simulate flow responses for large watersheds. The TOC is defined as the time required for 95% outflow response.

No particle removal occurs in a PIPE, regardless of TOC.

Set the OUTFLOW DEVICE NUMBER to '0' to route flow out of system, otherwise to a device listed in the DEVICE INDEX.

FLOW SPLITTER	
DEVICE NUMBER	1
DEVICE LABEL	<b>splitter</b>
TIME OF CONCENTRATION (hrs)	[REDACTED]
OUTFLOW TO DEVICE [REDACTED], IF SURFACE ELEV. < [REDACTED] FEET	
OTHERWISE, OUTFLOW TO ALTERNATIVE DEVICE [REDACTED]	

### Device label

F1=HELP, F2=DONE/SAVE, F3=EDIT FIELD, F7=HELP/EDITOR, <ESC>=ABORT

#### 'Case Edit Device Data' - Flow Splitter (TYPE = 6)

A FLOW SPLITTER can be used to direct flows to either of two devices, depending upon the water surface elevation in one of them.

To simulate an offline infiltration basin, for example, place a FLOW SPLITTER upstream of the infiltration basin, referenced to the basin's maximum storage pool elevation. When the basin's storage pool is filled, inflows will be diverted to the ALTERNATIVE device specified for the FLOW SPLITTER.

A SPLITTER is modeled as a linear reservoir with a given TIME OF CONCENTRATION (hrs) (Bedient & Huber (1988), p. 370-3). For TOC=0, the device outflows respond immediately to inflows. Higher values will stretch the response out over longer times, while preserving water & mass balances. The magnitude of the peak flow is reduced, but the time of peak flow is not changed. TOC is defined as the time required for 95% outflow response. Particles are not removed in a SPLITTER, regardless of TOC.

The NORMAL OUTLET from a FLOW SPLITTER must be routed to a valid device number (not = 0).

AQUIFER	
DEVICE NUMBER	4
DEVICE LABEL	baseflow
TIME OF CONCENTRATION (hrs)	100
OUTFLOW DEVICE NUMBER	5

device label

F1=HELP, F2=DONE/SAVE, F3=EDIT FIELD, F7=HELP/EDITOR, <ESC>=ABORT

'Case Edit Device Data' - Aquifer (TYPE = 7)

An Aquifer Device provides storage & discharge of percolation from pervious watershed areas. Percolation is estimated from the following water balance:

$$\text{Percolation} = \text{Rainfall} - \text{Surface Runoff} - \text{Evapotranspiration}$$

Surface Runoff is estimated using the SCS Curve Number.

Evapotranspiration is computed from air temperature & month. (see 'Case Edit Evapotrans').

Predicted outflow from an aquifer approximates baseflow.

The time response of Aquifer Outflow is modeled as a linear reservoir (Haith & Shoemaker, 1987). The TIME OF CONCENTRATION is typically long (> 100 hours). This parameter can be calibrated to watershed hydrographs. See 'Run Calibrate'.

EVAPOTRANSPIRATION PARAMETERS				
CALIBRATION FACTOR:		normally ~ 1		
COMPUTED ANNUAL ET:		21.9145 INCHES/YEAR		
DAILY TEMPERATURE FILE:		prov6988.tnp		
MONTH	VEG. COVER FACTOR	AIR TEMP DEG-F	DAYLIGHT HRS/DAY	COMPUTED ET INCHES/MONTH
Jan	5	27	9.5	0
Feb	5	30	10.6	0
Mar	5	39	11.9	.51392
Apr	5	48	13.6	.87442
May	75	59	14.6	2.3554
Jun	1	66	15.2	4.1573
Jul	1	72	14.9	5.0109
Aug	1	70	13.3	4.0903
Sep	1	63	12.5	2.5469
Oct	1	54	11.1	1.5302
Nov	75	43	9.0	.58607
Dec	5	34	9.1	.24906

number of daylight hours per day (hours)

F1=HELP, F2=DONE/SAVE, F3=EDIT FIELD, F7=HELP/EDITOR, <ESC>=ABORT

#### 'Case Edit Evapotrans'

These parameters are used only if the device network contains an AQUIFER (Type=7) for computation of baseflow. ET is computed from AIR TEMPERATURE, VEGETATIVE COVER, & DAYLIGHT HOURS (Haith & Shoemaker, 1987).

VEGETATIVE COVER, & DAYLIGHT HOURS are entered on a monthly basis. The CALIBRATION factor (normally=1) can be used to adjust computed ET values (e.g., when calibrating against observed streamflow).

AIR TEMPERATURES can be entered in either of two ways:

- > monthly-average values (entered on edit screen)
- > daily-average values (entered from disk file, ex. = 'prov6988.tnp')

The second option is used if a valid file name is entered & if it contains data for dates covered in the STORM FILE. Otherwise, the monthly-mean air temperatures specified on this screen are used.

Default screen values are based upon Providence climate. These values predict annual ET ~21 in/hr, which typical of watersheds in the Northeast.



SIMULATION TIME STEPS			
WET TIME STEP	(HOURS)	1	~.25-1 (MUST BE <=1 HOUR)
DRY TIME STEP	(HOURS)	4	~4-8
WET/DRY LAG	(HOURS)	2	~2-4
STABILITY CRITERION (IN/HR)		.05	~0-.1
MAXIMUM CONTINUITY ERROR (%)		2	~2%

wet time step (hours) <=1

F1=HELP, F2=DONE/SAVE, F3=EDIT FIELD, F7=HELP/EDITOR, <ESC>=ABORT

### 'Case Edit TimeSteps'

WET TIME STEP ( $T_w$ ) is used during storms & for a specified number of hours after storms ( $T_x = \text{WET/DRY LAG} = \text{an integer}$ ).  $T_w$  must be  $\leq 1$  hour &  $1/T_w$  must be an integer. Program adjusts input  $T_w$  accordingly. DRY TIME STEP ( $T_d$ ) is used at other times ( $>T_x$  hours after end of storm). WET TIME STEP is also used until changes in device elevation are less than STABILITY CRITERION (inches/hour) (if = 0, ignored).

When a simulation is completed, a warning message is issued if estimated errors in the water or mass-balances exceed the MAXIMUM CONTINUITY ERROR. Mass-balance errors reflect the fact that the solution algorithm for outflow concentration at a given time step assumes a constant (average) device volume during the time step. Accordingly, continuity errors will tend to be higher for devices with rapid fluctuations in volume (e.g., buffers, swales), as compared with devices with steady volumes (e.g., wet ponds). To reduce continuity errors & increase numerical accuracy, use smaller time steps.

Nominal Values  $T_w=.25-1$ ,  $T_d=4-8$ ,  $T_x=2-4$ ,  $Stab \sim .05$  in/hr for MAX ERROR  $\leq 2\%$ . Run times will be sensitive to these values, but results should be insensitive, if appropriate values are selected. Try shorter time steps to see if they affect results significantly.

PARTICLE CHARACTERISTICS					
Title:	mwp particles 50% (median) site				
Size Fraction Label	1	2	3	4	5
	P0%	P10%	P30%	P50%	P80%
Accumulation Rate lbs/ac-d	0	1.75	1.75	1.75	3.5
Accum. Decay Rate 1/day	0	.25	.25	.25	.25
Washoff Coefficient	0	20	20	20	20
Washoff Exponent	0	2	2	2	2
Sweeper Efficiency %	0	4	8	12	16
Imperv. Runoff Conc ppm	1	0	0	0	0
Perv. Runoff Conc ppm		100	100	100	200
Perv. Runoff Exponent	0	1	1	1	1
Settling Velocity ft/hr	0	.03	.3	1.5	15
First-Order Decay 1/day	0	0	0	0	0
2nd-Order Decay 1/day-ppm	0	0	0	0	0
Filtration Effic. %	94	100	100	100	100

title for particle matrix

F1=HELP, F2=DONE/SAVE, F3=EDIT FIELD, F7=HELP/EDITOR, <ESC>=ABORT

### 'Case Edit Particles' - Define Particle Characteristics

#### ACCUMULATION/WASHOFF PARAMETERS FOR IMPERVIOUS SURFACES:

- Accumulation Rate - buildup of particles on impervious surfaces
- Decay Rate - removal via non-runoff processes
- Washoff Coefficient - used to compute washoff = SWMM "RCOEFX"
- Washoff Exponent - used to compute washoff = SWMM "WASHPO"
- Sweeper Efficiency - % removed in one pass of street sweeper
- Imperv. Runoff Conc - in addition to accumulation/washoff

#### PERVIOUS RUNOFF PARAMETERS:

- Concentration - Runoff Conc (ppm) at Runoff Intensity of 1 in/hr
- Exponent - Slope of Log(Conc) vs. Log(Intensity) relationship

#### PARTICLE CLASS PARAMETERS:

- Settling Velocity - rate of sedimentation in treatment device
- First-Order Decay - rate of decay via first-order processes
- 2nd-Order Decay - rate of decay via second-order processes
- Filtration Effic. - % of particles removed from infiltrating flows

WATER QUALITY COMPONENTS					
VARIABLE LABEL	1	2	3	4	5
	tss	cu	eka	fu	ph
PARTICLE FRACTION	PARTICLE COMPOSITION (mg/kg)				
1	0	99000	600000	13500	2000
2	1000000	3850	15000	340	100
3	1000000	3850	15000	340	130
4	1000000	3850	15000	340	180
5	1000000	0	0	0	180
SCALE FAC.					
LEVEL	WATER QUALITY CRITERIA (ppm)				
A	5	025	2	2	02
B	10	05	1	0048	014
C	20	1	15	02	15

variable label

F1=HELP, F2=DONE/SAVE, F3=EDIT FIELD, F7=HELP/EDITOR, <ESC>=ABORT

### 'Case Edit Components'

Up to 10 WATER QUALITY COMPONENTS can be defined. Each column represents a separate COMPONENT. Columns must be used in consecutive order (no intervening blank columns).

COMPONENT concentrations are computed based upon the simulated concentrations of each particle class and the CONTENTS of each PARTICLE CLASS (mg/kg), as specified in this screen. The SCALE FACTOR is multiplied by all PARTICLE COMPOSITION values - this provides an easy way of modifying the CONTENTS of all particle fractions simultaneously.

Particle compositions refer to runoff suspended solids, not to soils or to street dust/dirt accumulations.

Up to 3 water quality criteria or standards ('LEVELS A, B, C') may be specified for each COMPONENT. Program computes violation frequencies for each COMPONENT, LEVEL, and DEVICE (see 'List Violations').

Concentration units are PPM (= MG/LITER) for each WATER QUALITY COMPONENT.

**TRANSLATE NOAA/NCDC HOURLY PRECIP FILES  
RELEASE B - CONDENSED FORMAT**

**INPUT FILES (in Time Sequence):**

1:

2:

3:

4:

5:

6:

7:

8:

9:

10:

**OUTPUT FILE:**

**TITLE:**

**MINIMUM INTER-EVENT TIME (HRS):**

**input file number 1**

**F1=HELP, F2=DONE/SAVE, F3=EDIT FIELD, F7=HELP/EDITOR, <ESC>=ABORT**

**'Utilities NOAA'**

The National Climatic Data Center in Ashville, NC can provide hourly precipitation data on diskette for NOAA weather stations in the U.S.. Call 704-259-0682 to order. The cost is ~\$90/station for the period of record (~33 yrs) on 1.2 Mbyte diskettes. Request files in RELEASE B / CONDENSED FORMAT. Each file typically contains 5 years of data.

File names specified on this screen will be read and a single storm file (.STM) will be generated for subsequent use by P8. Use a text editor to break up the .STM file into separate years or other time frames (or to create your own storm files). Storm years in input files must be between 1942 and 1999.

**MINIMUM INTER-EVENT TIME (MIT)** - wet hours within MIT hours of each other are considered part of the same "storm" (typically 3-10 hrs). See Bedient and Huber(1986); Huber and Dickinson (1988). The Providence files supplied with the program were generated with an MIT value of 5 hours.

The NOAA input file must be "normal", containing no missing or otherwise obtuse records. This is usually not a problem (based upon experience with Providence, Boston, and Minneapolis data files).

**Infiltration Rates**

References: (a) (b) (c)

SOIL TEXTURE	(a) In/hr	(b) In/hr	SCS SOIL GROUP	(a) In/hr	(c) In/hr
Sand	4.04	6.27	A	.43	.38-.45
Loamy Sand	1.18	2.41	B	.26	.15-.38
Sandy Loam	.43	1.82	C	.13	.05-.15
Silt Loam	.26	.27	D	.03	.04-.05
Loam	.13	.52			
Silt Loam		.27			
Sandy Clay Loam	.06	.17			
Clay Loam	.04	.09			
Silty Clay Loam	.04	.06			
Sandy Clay	.03	.05			
Silty Clay	.02	.04			
Clay	.01	.02			

Sources: a - McCuen(1982) b - Shaver (1986) c - Musgrave(1955)

\$ Yousef et al. (1986) recommend using infiltration rate of "1 in/hr for designing retention basins in sandy and sandy loam soils.

**Manning's n**

This coefficient reflects the roughness of the land surface and resistance to overland flow. Higher values will increase the depth and duration of flow in swales/buffers during and following storm events.

COVER	MANNING'S N	SOURCE
Light Turf	.28	McCuen (1982)
Dense Turf	.35	"
Forest with Dense Grass Understory	.80	"
Dense Growth	.48-.58	Bedient and Huber(1988)
Pasture	.38-.48	"
Lawns	.28-.38	"
Bluegrass Sod	.28-.58	"
Short-grass prairie	.18-.28	"
Sparse Vegetation	.05-.13	"
Bare Clay-Loam Soil	.01-.03	"

NOTE: Predicted particle removal efficiencies in swales/buffers are very insensitive to Manning's n (and Slope) if infiltration rate = 0. Sensitivity increases with infiltration rate.

**Runoff Curve Numbers**

LAND USE	HYDROLOGIC CONDITION	Hydrologic Soil Group			
		A	B	C	D
Grassed Areas (lawns, parks, golf courses, cemeteries, etc.)	Good (>75% cover)	39	61	74	88
	Fair	49	69	79	84
	Poor (<50% cover)	68	79	86	89
Meadow or Idle Land	Good	38	58	71	78
	Woods				
	Good (thick forest)	25	55	78	77
	Fair	36	68	73	79
	Poor (thin, no mulch)	45	66	77	83
Construction Sites	Highly Graded Areas	81	89	93	95

\$ Lawns normally assumed to be in good hydrologic condition  
Source: USDA, SCS (1977).

NOTE: Curve numbers used in model refer to IMPERVIOUS PORTION OF SITE only. Impervious areas are modeled separately.

**Depression Storage**

This watershed variable refers to impervious portion of watershed only. Kidd (1978) presents the following equation, based upon data from Holland, United Kingdom, and United States:

$$\text{Depression Storage (in)} = .03 \text{ Slope}^{-.49}$$

where, Slope = average watershed slope (%)  
Based upon this equation:

Slope %	Depression Storage (in)
.5	.042
1	.038
2	.021
3	.019
4	.015
5	.014

Model simulations of particle removal efficiency over a range of storms are very insensitive to depression storage in the above range.

**Maximum Flow Depth - Buffer/Swale**

This parameter defines the maximum flow depth at which the specified value of Manning's n applies for computation of overland sheet flow. According to TR-55 (USDA/SCS,1985), this depth is on the order of .1 feet. This would be related to grass/vegetation depth in simulating overland flows.

Predicted particle removal efficiencies are usually insensitive to the maximum flow depth.

The model constrains the computed flow depth to this value. Excess inflows are routed through the buffer at a fixed cross-section.

**Particle Removal Scale Factor**

This factor adjusts the particle removal rates (settling velocities, first-order decay rates, second-order decay rates) for each device. Normally, it has a value of 1.0.

Other values can be used, for example, to account for effects of vegetation on particle removal rates. Theoretically, macrophytes can increase particle removal rates under a given hydraulic regime by increasing the effective surface area for settling (tray-settling concept), stabilizing bottom sediments, and/or through biological mechanisms. Design methodologies developed in Australia account for a 75-90% increase in sediment & phosphorus removal at a given hydraulic residence time in ponds with macrophytes vs. ponds without macrophytes (Phillips & Gueen, 1987; Lawrence, 1986). Their removal efficiency curves are consistent with 'Removal Scale Factors' of 2-3 for suspended solids & 3-6 for total phosphorus attributed to macrophyte presence in wet detention ponds.

Alternatively, values less than 1.0 can be assumed to account for poor hydraulic design (outlet next to inlet, promoting short-circuiting of inflows).

**Time of Concentration**

Certain devices (PIPES, SPLITTERS, AQUIFERS) are modeled as linear reservoirs each with a specified TIME OF CONCENTRATION (hours). The linear reservoir model assumes that outflow at any time is proportional to the storage volume (Bedient and Huber, 1988). The TIME OF CONCENTRATION is used to compute the proportionality constant using the following equation:

$$K (1/hr) = 2.303/TOC (hr)$$

As used here, the TIME OF CONCENTRATION is defined as the time required for a 98% inflow/outflow response. This can be roughly equated to a hydrologic definition of watershed TOC stated by Bedient & Huber (1988), p.88: 'time of equilibrium of the watershed, where outflow is equal to net inflow'.

Since precipitation data are supplied on an hourly basis, TOC values less than 1 hour (typical of small urban watersheds) will have little impact on simulation results. TOC is more likely to be an important factor in simulating hydrographs for large watersheds. SCS methods (e.g., TR-55) can be used to estimate TOC values.

Higher TOC values will stretch the outflow hydrograph out over longer periods & decrease peak flow (see example file = 'PIPES.CRS').

**Watershed Impervious Fractions**

Impervious Fractions vs. GIS Land Use - Hunt Potomac Watershed

GIS Land Use	Mean	Range
Residential 111 High Density	.41	.32-.68
Residential 113 Medium Dens.	.27	.28-.38
Residential 114 Med-Low Dens.	.25	.06-.79
Residential 115 Low Density	.14	.18-.18
Residential 116 Rural Density	.05	.03-.06
Commercial 128	.62	.44-.92
Industrial 131 Heavy	.01	.74-.93
Industrial 132 Medium	.77	.59-1.0
Transportation 141 Roads, Interch., Service	.41	.23-.68
Institutional 189 Educ., Health, Prisons, Milit.	.47	.38-.77

Impervious Fractions vs. Land Use Classifications (USDA, 1985)

Land Use Classifications	1/4	1/3	1/2	1
Residential Areas				
Lot Size (acres):	<=1.0	1.4	1.2	1
Impervious Fraction:	.65	.38	.38	.25
Industrial Areas	.72			
Commercial & Business	.85			

## APPENDIX C

### Output Formats

Output screens are shown on left, corresponding help screens, on right. These screens were generated by running the sample case 'TEST.CAS' contained on the distribution disk. Procedures are outlined in Appendix A.

- C-1 'Run Model', 'List Balances'
- C-2 'List Removals'
- C-3 'List Terms Outflow'
- C-4 'List Violations Outflow', 'List Sedimen'
- C-5 'List Peaks', 'List Details Events'
- C-6 'List Means Outflow'
- C-7 'List Continuity', 'Case List Tables'
- C-8 'Plot Events Timeser', 'Plot Events Cumulative',  
'Plot Events Frequency'
- C-9 'Plot Events Lognormal', 'Plot Events Scatter', 'Plot Events Monthly'

```

1. PRESS <ESC> TO STOP SIMULATION
CASE TITLE = test case
CASE FILE = TEST.CAS
STORM FILE = PROUB387.SCM
DEVICES = 11
WATERSHEDS = 9

PRESS = 1/ 1 STORM = 111 DATE = 850927
PRECIP = .10 DURATION = 5 INTERVAL = 139
KEEP = 1

warning: device overflow: 9 online ; storm = 0
warning: device overflow: 12 offline ; storm = 0
warning: device overflow: 17 buffer ; storm = 93
warning: device overflow: 15 swale ; storm = 98
warning: device overflow: 19 general ; storm = 98

```

```

RUN TIME = 3.284 MINUTES, = .178 MINUTES/DEVICE/VEAR
calculating totals over all storms...

```

```

number of storms = 111
interval = 8881. hrs, storm duration = 789. hrs, precip = 39.44 inches
device = 7 extpond ; type = pond ; variable = tss
mass-balance term
01 watershed inflows acre-ft flow load ppm
06 normal outlet 91.56 91.56 29728.78 119.4382
08 sediment + decay 91.56 91.56 8883.23 35.6965
09 total inflow 91.56 91.56 29728.78 119.4382
10 surface outflow 91.56 91.56 8883.23 35.6965
12 total outflow 91.56 91.56 8883.23 35.6965
13 total trapped .00
14 storage increase .00
15 mass balance check .00

load removal efficiency = 78.11 %; adjusted = 78.11 %
continuity errors: volume = .00 %; load = .00 %

```

412

'Run Mode!'

Model input values are checked for validity.

If errors are found, messages are printed and program returns to main menu. See 'Help Errors' for explanation of error messages.

Otherwise, simulation begins.

Storm characteristics are listed as they are encountered in the input storm file (PASS, STORM, PRECIP, DURATION, INTERVAL, KEEP).

KEEP is set to 1 during last pass through storm file. When KEEP=1, results are saved for subsequent listing and display.

To stop simulation before end of storm file, press <ESC>; results will be saved, if possible.

'List Balances'

Lists water and mass balances.

Prompts for devices and components to be used. Use cursor arrows and space bar to select ('\*') or unselect ('/') items. Press <ENTER> key when done, <ESC> to quit and return to menu.

Prints storm statistics, flow, load, and flow-weighted concentration for each non-zero mass-balance term.

Load reduction efficiencies are computed with and without adjusting for continuity errors.

Options:

'List Balances All' - results over all storms

'List Balances Each' - results for each storm separately

2

device	removal efficiencies (%) vs. device and particle class				
	1	2	3	4	5
1 pipe	P8% .0	P18% .0	P36% .0	P56% .0	P86% .0
3 wetpond	.5	49.6	65.2	88.7	96.8
5 drypond	.0	9.0	40.0	71.5	95.1
7 extpond	.0	15.0	55.3	83.6	97.9
9 online	56.2	65.7	72.8	86.6	92.8
11 splitter	.0	.0	.0	.0	.0
12 offline	70.7	90.1	91.2	93.3	97.8
13 outflow	.0	.0	.0	.0	.0
15 swale	9.1	11.1	30.7	57.9	88.1
17 buffer	15.1	18.5	42.5	68.1	92.0
19 general	.0	50.2	87.8	97.5	99.7
25 OVERALL	14.7	32.3	51.7	68.1	82.1

'List Removals'

Lists removal efficiencies for each device, particle class, and water quality component, based upon all storms.

OVERALL = value based upon mass-balance for entire device network.

Removal is attributed to the combined effects of settling, decay, and filtration occurring the devices.

Since street sweeping reduces loads upstream of devices, computed removal efficiencies do not include effects of street sweeping.

To force a mass balance in computing removal efficiencies, continuity errors are apportioned to the device outflow and removal terms. Effects of continuity errors should be negligible if proper time steps are used.

412

device	removal efficiencies (%) vs. device and water quality component									
	tss	tp	tkn	cu	pb	zn	hc			
1 pipe	.0	.0	.0	.0	.0	.0	.0			
3 wetpond	77.8	42.4	42.4	42.4	71.2	42.4	71.2			
5 drypond	62.1	10.1	10.1	10.1	56.9	10.1	56.9			
7 extpond	78.1	26.2	26.2	26.2	64.1	26.2	64.1			
9 online	80.8	65.5	65.5	65.5	78.7	65.5	78.7			
11 splitter	.0	.0	.0	.0	.0	.0	.0			
12 offline	94.8	87.9	87.9	87.9	92.9	87.9	92.9			
13 outflow	.0	.0	.0	.0	.0	.0	.0			
15 swale	55.2	17.8	17.8	17.8	51.3	17.8	51.3			
17 buffer	62.6	26.4	26.4	26.4	58.6	26.4	58.6			
19 general	87.0	50.8	50.8	50.8	79.6	50.8	79.6			
25 OVERALL	63.2	34.8	34.8	34.8	59.1	34.8	59.1			


413



variable = 6 tss  
 mass balance term = 12 total outflow

device	volume ac-ft	load lbs	conc ppm	removal %
1 pipe	91.56	29728.78	119.436	.88
3 wetpond	91.56	6585.97	26.465	77.83
5 drypond	91.56	11249.94	45.297	62.15
7 extpond	91.56	8883.23	35.697	78.11
9 online	91.56	5788.72	22.948	88.79
11 splitter	91.56	29728.78	119.436	.88
12 offline	68.21	1382.66	8.449	94.85
13 offline	38.41	789.89	75.378	.88
15 swale	91.56	13316.44	53.511	55.19
17 buffer	91.56	1899.59	44.683	62.64
19 general	91.56	3863.74	15.526	87.88

412

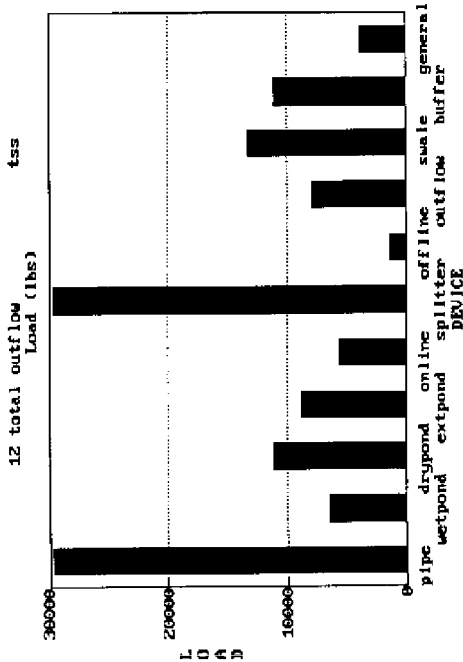

'List Terms'

Alternative tabulation of water-balance & mass-balance terms,  
 Prompts for list of particle classes & list of devices,  
 Each screen refers to one mass-balance term & particle class,  
 For each device, lists total flow, total load, average concentration,  
 & removal efficiency,  
 Produces barchart which compares flows, loads, concentrations, or removal  
 efficiencies across devices.

Options:

- 'List Terms Outflow' Total Outflows (Inflle,+Normal+Spillway)
- 'List Terms Surface' Surface Outflows (Normal + Spillway)
- 'List Terms Inflow' Total Inflows (Watersheds + Upstr, Devices)
- 'List Terms Any' List User-Selected Term

test case storm events = 111  
water quality component = 4 cu

device	term	nonzero events	criteria (ppm) ----		flow-std conc violation frequency (%)	mean maximum level-a level-b level-c
			2.000	.002		
1 pipe	12 total outflow	97	.00	.00	87.39	69.47
3 wetpond	12 total outflow	101	.00	.00	90.99	14.41
5 drypond	12 total outflow	99	.00	.00	89.19	44.14
7 extpond	12 total outflow	101	.00	.00	90.99	38.74
9 online	12 total outflow	102	.00	.00	13.51	2.78
11 splitter	12 total outflow	97	.00	.00	87.39	69.47
12 offline	12 total outflow	102	.00	.00	4.50	.90
13 outflow	12 total outflow	25	.00	.00	22.52	7.21
15 swale	12 total outflow	97	.00	.00	87.39	41.44
17 buffer	12 total outflow	97	.00	.00	88.18	36.04
19 general	12 total outflow	111	.00	.00	100.00	18.02

sediment accumulation rates by device, variable = tss  
assuming density = 1.8 tons/yd3 wet sediment

device	lbs/yr	yd3/yr	inches/yr	total device	permanent pool	only
3 wetpond	23822.7	11.51	.06	.00	.00	.24
5 drypond	10304.7	9.19	.05	.06	.00	.00
7 extpond	20740.4	10.37	.05	.07	.00	.00
9 online	23099.9	11.95	.10	.49	.00	.00
12 offline	21748.8	10.87	.16	.45	.00	.00
15 swale	16326.4	8.16	.13	1.22	.00	.00
17 buffer	10531.8	9.27	.10	1.63	.00	.00
19 general	25736.6	12.87	.02	.00	.00	.00

'List Violations'

Prompts for devices and components to be used. Use cursor arrows and space bar to select ('\*') or unselect (' ') items. Press <ENTER> key when done, <ESC> to quit and return to menu.

Calculates flow-weighted concentrations (mean & maximum over all events) & percent of events exceeding water quality criteria (Levels A, B, C specified on input, see 'Case Edit Components').

Options:

- 'List Violations Outflow' - device total outflows
- 'List Violations Surface' - device surface outflows (normal+spillage)
- 'List Violations Inflow' - device inflows only
- 'List Violations Any' - any mass-balance term (selected by user)

'List Sedim'

Lists predicted sediment accumulation rates in each device. This provides perspectives on expected lifetime & dredging frequency required to maintain performance.

Prompts for particle class/water quality component to be used. Normal response would be 'tss' (total suspended solids).

Rates are calculated on an areal basis (inches/year) & on a volumetric basis (% of device volume/year). Values are referenced to the total area/volume & to the permanent pool area/volume of the device.

Areal & volumetric accumulation rates assume a sediment density of 1 ton of solids per cubic yard of wet sediment (Schueler, 1987).

If runoff is routed through natural stream channels before reaching a device, actual sediment accumulation rates may be higher than predicted because of streambank erosion (not simulated by model).

extreme values over all storms

device	base elev	minimum elev	maximum elev	maximum inf low	maximum outflow	maximum velocity	wet period
	ft	ft	ft	cfs	cfs	ft/sec	%
1 pipe	.00	.00	.00	65.95	65.95	.00	.0
3 wetpond	.00	4.00	7.04	65.95	37.63	.00	100.0
5 drypond	.00	.00	5.33	65.95	42.12	.00	5.3
7 extpond	.00	.00	8.28	65.95	19.57	.00	13.2
9 online	.00	.01	4.00	65.95	65.71	.00	42.7
11 splitter	.00	.00	.00	65.95	65.95	.00	.0
12 offline	.00	.01	4.00	55.27	42.51	.00	49.7
13 outflow	.00	.00	.00	65.95	65.95	.00	.0
15 swale	.00	.01	1.00	65.95	65.57	1.46	3.1
17 buffer	.00	.00	.50	65.95	65.18	.64	1.6
19 general	.00	1.00	5.00	65.95	25.41	.00	100.0

statistical summary by event (nonzero values) - concentrations (ppm)  
device = 9 online , component = cu , total events = 111

term	count	sum	mean	cu	minimum	maximum
01 watershed inf	97	3.31	.341E-01	.482	.146E-01	.870E-01
03 infiltrate	102	2.11	.207E-01	.442	.111E-01	.587E-01
04 exfiltrate	102	.183	.181E-02	.026	.920E-03	.106E-02
07 spillway outl	17	.566	.333E-01	.282	.210E-01	.513E-01
09 total inf low	97	3.31	.341E-01	.482	.146E-01	.870E-01
10 surface outfl	17	.566	.333E-01	.282	.210E-01	.513E-01
11 groundw outfl	102	.183	.181E-02	.026	.920E-03	.106E-02
12 total outflow	102	.303	.297E-02	1.092	.920E-03	.367E-01

'List Peaks'

Lists extreme values for each device, based upon individual time-step results (not event means):

- Minimum Water Elevation (ft)
- Maximum Water Elevation (ft)
- Maximum Total Inflow (cfs)
- Maximum Surface Outflow (cfs)
- Maximum Flow Velocities (ft/sec)
- Wet Period (%)

Wet Period = percent of total time that there is more than 1 inch of standing water in the device.

Velocities are defined only for Device Type 3 (Swale/Buffer Strip). These are relevant to evaluating potential for device failure due to erosion or sediment resuspension.

'List Detail'

Lists detailed statistical summary of event-mean values for each flow or mass-balance term. This information is not needed for normal program applications.

Prompts for devices and components to be used.

Terms: number of non-zero events, sum, mean, coefficient of variation, minimum, maximum

Options:

- 'List Detail Flows'
- 'List Detail Loads'
- 'List Detail Conc's'
- 'List Detail Precip'

Only non-zero events are considered. If no flow occurs for a given device, event, and mass-balance term, it is not included in the statistical summary.

mass-balance term: 12 total outflow  
concentrations (ppm) vs. device and particle class

device	1	2	3	4	5
	P8%	P18%	P38%	P58%	P88%
1 pipe	1.888	23.886	23.886	23.886	47.772
3 wetpond	.988	12.811	8.322	4.688	1.532
5 drypond	.998	21.731	14.322	6.799	2.354
7 extpond	.999	28.188	18.673	3.928	.987
9 online	.436	8.282	6.681	4.624	3.433
11 splitter	1.888	23.886	23.886	23.886	47.772
12 offline	.218	2.888	2.487	1.894	1.268
13 outflow	1.888	16.828	16.325	15.396	26.829
15 swale	.986	21.223	16.544	18.866	5.678
17 buffer	.845	19.446	13.731	7.613	3.812
19 general	1.888	11.981	2.987	.589	.128
25 OVERALL	.858	15.174	11.546	7.618	8.558

412

concentrations (ppm)	us. device and water quality component						
device	tp	tkn	cu	pb	zn	hc	
1 pipe	119.438	.375	1.784	.839	.823	.182	2.937
3 wetpond	26.465	.215	.978	.822	.887	.184	.842
5 drypond	45.287	.387	1.396	.832	.818	.149	1.267
7 extpond	35.697	.277	1.258	.829	.888	.134	1.853
9 online	22.948	.129	.587	.813	.885	.863	.625
11 splitter	119.438	.375	1.784	.839	.823	.182	2.937
12 offline	8.449	.851	.233	.885	.862	.825	.242
13 outflow	75.378	.291	1.324	.838	.816	.141	1.948
15 swale	53.511	.388	1.399	.832	.811	.149	1.431
17 buffer	44.683	.275	1.251	.828	.818	.133	1.215
19 general	15.526	.185	.839	.819	.885	.889	.599
25 OVERALL	43.889	.244	1.118	.825	.818	.118	1.288

413

'List Means'

Lists flow-weighted-mean concentrations for each device, particle class,  
& water quality component, based upon all storms.

OVERALL = value based upon mass-balance for entire device network.

Options:

'List Means Inflow' - Inflow concentrations (ppm)

'List Means Outflow' - Total outflow concs. (infiltr.,normal,spillway)

'List Means Surface' - Surface outflow concs. (normal,spillway)

'List Means Any' - User-defined mass-balance term

7

device	continuity errors (%)	flow	flow	flow	flow	flow	flow	flow	flow	flow
1 pipe	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
2 drypond	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
3 drypond	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
4 drypond	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
5 drypond	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
6 online	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
7 online	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
8 online	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
9 online	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
10 splitter	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
11 splitter	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
12 offline	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
13 offline	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
14 offline	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
15 swale	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
16 swale	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
17 buffer	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
18 buffer	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
19 general	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
20 general	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
21 OVERALL	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00

'List Continuity'

Lists continuity check on simulation results for each device, flow volume, and particle class.

Based upon mass-balance equation:

Error = Inflows - Outflows - Removals - Increase in Storage

%Error = 100% x Error / Inflows

Large errors in water or mass balances generally indicate that the simulation time steps should be decreased (See 'Case Edit TimeSteps').

To minimize simulation times, adjust time steps to maximum values that give acceptable continuity errors (< 2%).

8

routing table for device: 15 swale

elevation	area	ac-ft	inflow devices:		total	velocity
			q	normal		
.00	.367	.000	.185	.000	.185	.000
.05	.372	.018	.188	.207	.474	.142
.14	.381	.054	.192	1.697	1.889	.207
.24	.389	.091	.196	3.995	4.141	.399
.33	.398	.128	.201	6.965	7.185	.495
.43	.407	.166	.205	10.511	10.716	.590
.52	.416	.205	.209	14.723	14.932	.659
.62	.424	.245	.214	19.511	19.725	.730
.72	.433	.286	.218	24.054	25.072	.798
.81	.442	.328	.223	30.738	30.964	.861
.91	.450	.370	.227	37.149	37.376	.922
1.00	.459	.413	.231	44.000	44.311	.968

'Case List Tables'

List elevation/storage/discharge table for specified devices.

This table defines the "rules" used for routing flow through devices.


For device types 1,2, and 3, the table is generated from the specified input data. For device type 4 (general), the table is entered directly by the user.

Volume increments are calculated from the average area and thickness of each elevation increment.


Estimates of flow velocity (ft/sec) are also provided for Device Type 3 (swale/buffer). These are important for considering the potential for scouring (resuspension) of sediments.

Tables are not generated for device types 5 (pipe), 6 (flow splitter), or 7 (aquifer), which are driven by linear reservoir models.

9

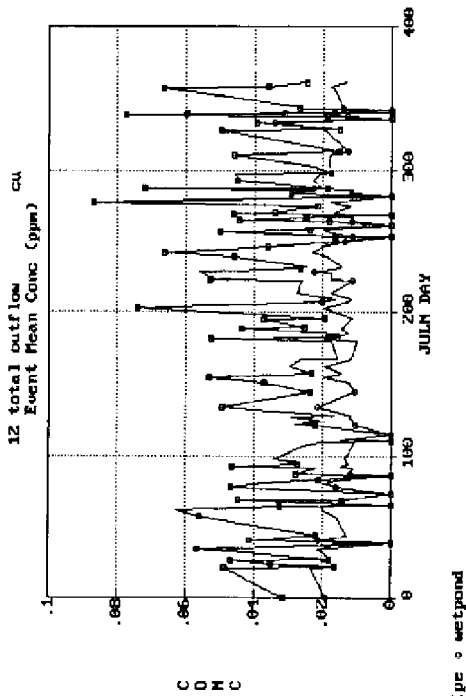

□ pipe ◊ wetpond ◊ online ▲ buffer  
PRESS R to Rescale, D to Dump

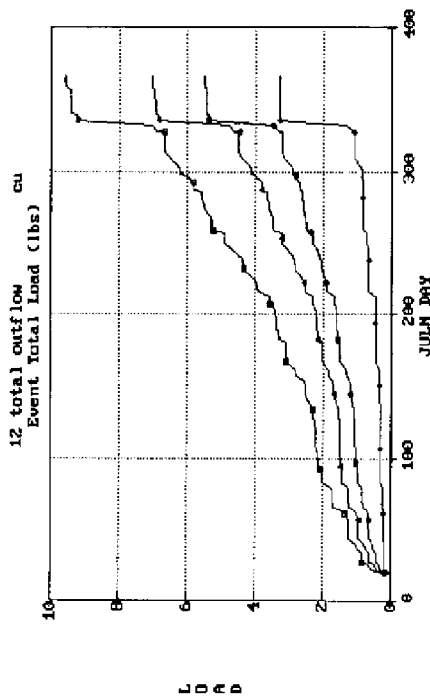

□ pipe ◊ wetpond ◊ online ▲ buffer  
PRESS R to Rescale, D to Dump

'Plot Events'


Prompts for devices, components, and mass-balance terms to be used. A separate display is produced for each mass-balance term and component. Different line colors/symbols are used to represent different devices. Up to 8 devices may be selected (4 for CCA graphics).

Plots event flows, loads, concentration, or precipitation vs. time in hours from start of simulation. Times refer to midpoints of stores,


Options:

- 'Plot Events Times' . . . Event Totals or Means vs. Time (Julian Day)
- 'Plot Events Cumulatives' . . . Running Totals vs. Time
- 'Plot Events Frequency' . . . Cumulative Frequency Distributions
- 'Plot Events Lognormal' . . . Lognormal Freq. Distributions
- 'Plot Events Scatter' . . . Scatter Plots

To stop display sequence, press <ESC> when the <H> prompt appears.

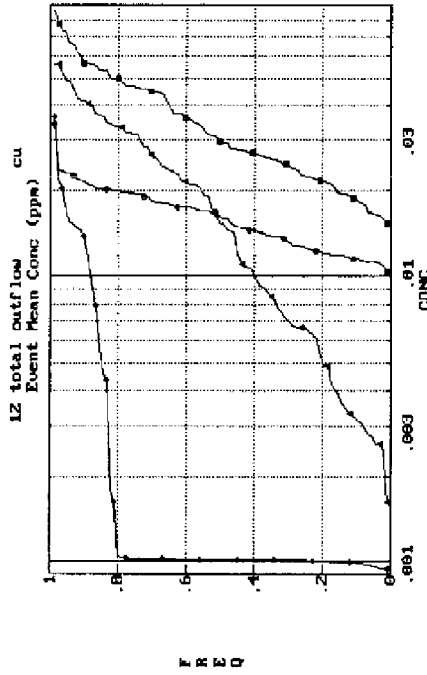


□ pipe ◊ wetpond ◊ online ▲ buffer  
PRESS R to Rescale, D to Dump

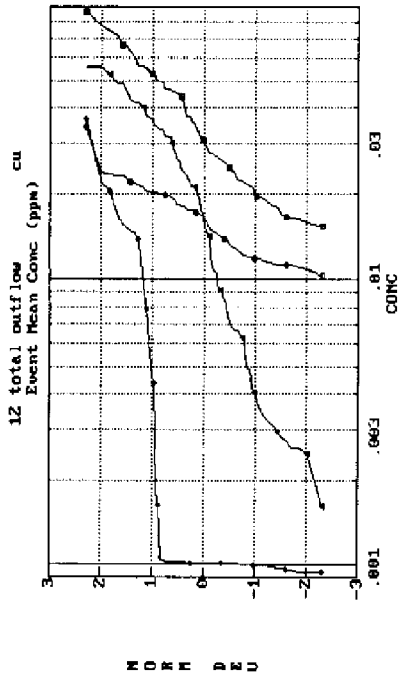

M  
D  
R  
M  
D  
E  
U

□ pipe ◊ wetpond ◊ online ◊ buffer

PRESS R to Rescale, D to Dump

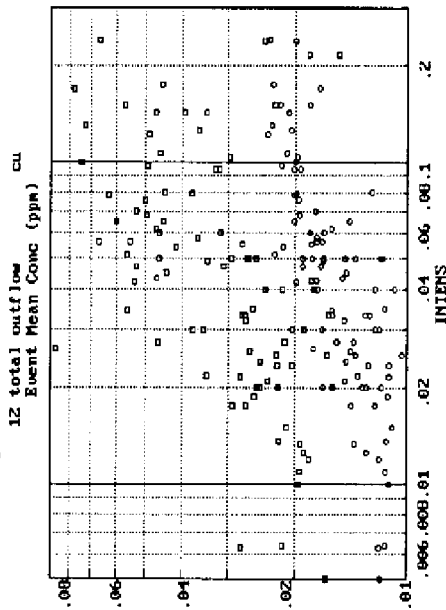

C  
D  
N  
C

□ pipe ◊ wetpond

PRESS R to Rescale, D to Dump

'Plot Events'


Prompts for devices, components, and mass-balance terms to be used.  
A separate display is produced for each mass-balance term and component.  
Different line colors/symbols are used to represent different devices  
Up to 8 devices may be selected (4 for CCF graphics).

Plots event flows, loads, concentration, or precipitation vs. time in  
hours from start of simulation. Times refer to midpoints of storms.

Options:

- 'Plot Events Tinsers' Event Totals or Means vs. Time (Julian Day)
- 'Plot Events Cumulatives' Running Totals vs. Time
- 'Plot Events Frequency' Cumulative Frequency Distributions
- 'Plot Events Lognormal' Lognormal Freq. Distributions
- 'Plot Events Scatter' Scatter Plots

To stop display sequence, press <ESC> when the <H> prompt appears.

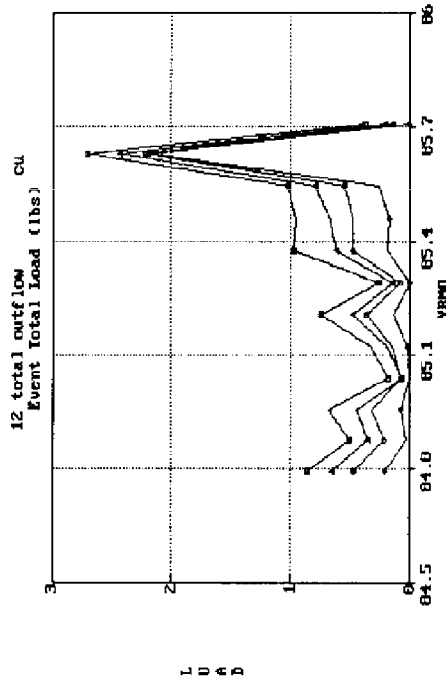

L  
U  
R  
D

□ pipe ◊ wetpond ◊ online ◊ buffer

PRESS R to Rescale, D to Dump

## APPENDIX D

### Help Screen Index

Titles to help screens provided with the program are listed below. These titles are indexed numerically, but are otherwise in no particular order. These screens are accessed through the main program (<F1>, <F8> keys) or through the independent utility 'HELP.EXE' provided with the program. This program can be used to search the entire help data base for any user-defined phrase. For additional details, see USER'S MANUAL.

- 1 'Case List'
- 2 Particle Removal Scale Factor
- 3 Orifice & Weir Coefficients
- 4 'Case Edit Particles' - Define Particle Characteristics
- 5 'Case Edit First'
- 6 Storm Data File Format
- 7 'Case Edit Watersheds Index'
- 8 'Case Edit Watersheds Data'
- 9 'Case Edit Devices Index'
- 10 'Case Edit Devices Data'
- 11 'Case Edit Devices Data' - Detention Pond (TYPE = 1)
- 12 'Case Edit Devices Data' - Infiltration Basin (TYPE = 2)
- 13 'Case Edit Devices Data' - Swale/Buffer (TYPE = 3)
- 14 'Case Edit Device Data' - General Device (TYPE = 4)
- 15 'Case Edit Device Data' - Pipe (TYPE = 5)
- 16 'Case Edit Device Data' - Flow Splitter (TYPE = 6)
- 17 'Case Edit Components'
- 18 'Case Edit TimeSteps'
- 19 'Case Edit Data All'
- 20 'Case Read'
- 21 'List Means'
- 22 'Case Save'
- 23 'List'
- 24 'Case Zero'
- 25 'Run Model'
- 26 Run Times
- 27 'List Balances'
- 28 'List Violations'
- 29 'List Removals'
- 30 'List Detail'
- 31 'List Detail Traced'
- 32 'List Continuity'
- 33 'Case List Tables'
- 34 'Plot Daily'
- 35 'Case Edit Device Data' - Aquifer (TYPE = 7)
- 36 'Plot Traced'
- 37 'List Sedim'
- 38 'Utilities Trace'
- 39 Simulation Methods - Device Concentrations (ct.)
- 40 'Case Edit Watersheds'
- 42 Simulation Methods - Device Flows (ct.)
- 43 'Utilities NOAA'
- 44 Simulation Methods - Watershed Runoff
- 45 Simulation Methods - Watershed Loadings
- 46 Simulation Methods - Buildup and Washoff
- 47 Simulation Methods - Device Flows
- 48 Simulation Methods - Device Concentrations
- 49 Device Outlets
- 50 Warning: Device Overflow
- 51 Run Times vs. Hardware
- 52 File Errors
- 53 Device Elevations
- 54 Time of Concentration
- 55 Illegal Device Linkage
- 56 Computer System Requirements
- 57 Mass Balance Terms 01-05
- 58 Mass Balance Terms 06-12
- 59 Mass Balance Terms 13-15
- 60 Mass Balance Equations
- 61 Particle/Component Files
- 62 Air Temperature Files
- 63 Storm Data Files



## Help Screen Index (ct.)

64	Case Data Files - Simple Examples
65	Case Data Files - Real
66	Modeling Construction Sites
67	Maximum Flow Depth - Buffer/Swale
68	File Naming Conventions
69	Recent Program Enhancements
70	'Case Edit Devices'
71	'Plot Events'
72	'Plot Events Cumulatives'
73	'Plot Events Frequency'
74	'Plot Events LogNormal'
75	'Plot Events Scatter'
76	'Utilities Batch'
77	'Run Design'
78	'Run Design Lookup'
79	'Run Design Tune'
81	'List Peaks'
82	Infiltration Rates
83	Particle Settling Velocities
84	Particle Composition
85	Runoff Curve Numbers
86	Manning's n
87	Depression Storage
88	Run Design Tune - Error Message
89	'Run Sensitivity'
90	'List Terms'
91	Washoff Parameters - Particle Fractions P10%-P80%
92	Pervious Runoff Concentrations
93	Water Quality Criteria
94	Detention Pond Outlet Hydraulics
95	Swale/Buffer Hydraulics
96	Particle Scouring Velocities
97	Watershed Impervious Fractions
98	'Case Edit Evapotrans'
100	P8
101	INTRODUCTION
102	PRIMARY USES OF PROGRAM ("Relative Predictions")
103	SECONDARY USES OF PROGRAM ("Absolute Predictions"):
104	WATERSHEDS
105	DEVICES
106	PARTICLE CLASSES
107	WATER QUALITY COMPONENTS
108	PRECIPITATION & AIR TEMPERATURE DATA
109	MODEL LIMITATIONS - WATERSHEDS
110	MODEL LIMITATIONS - DEVICES
111	MODEL LIMITATIONS - GENERAL
112	TABULAR OUTPUT FORMATS
113	GRAPHIC OUTPUT FORMATS
114	TYPICAL APPLICATION SEQUENCE
115	PROGRAM DISTRIBUTION & SUPPORT
116	MODEL TESTING
117	Recommended Procedure for Defining New Cases
118	Recommended Procedure for Site BMP Design
119	Case List Areas
120	P8-PLUS
121	'Run Calibrate'
123	'Plot Monthly' or 'Plot Yearly'
180	Menu Operation
181	Screen Editor Control Keys
182	<H> Message
183	Single Choice Windows
184	Multiple Choice Windows
185	Define Graphics Mode
186	View DOS File
187	User Mode
188	Plots
189	Printing Graphs
193	Programming Details
194	Directing Program Output
195	Help
196	Program Mechanics

## APPENDIX E

### Installation and Application Procedures

- E-1      Installing Program
- E-2      Running Sample Cases
- E-3      Entering New Cases
- E-4      Designing Site BMP's

Note: See P8 User's Manual (IEP, Inc., 1990) for more detailed, step-by-step instructions and examples.

Table E-1  
Installing Program

1. Verify that your computer conforms to the following:
  - IBM/PC Compatible (AT or higher class strongly recommended)
  - MSDOS or PCDOS operating system (Version  $\geq$ 3.2 recommended)
  - At least 460K available memory (beyond that required by DOS)
  - Hard disk with at least 2.2 megabytes of available storage
  - Numeric Coprocessor (strongly recommended)
  - CGA, MONOCHROME CGA, EGA or VGA graphics (optional)
2. The program is distributed on a 1.2 megabyte (AT style), 5.25 inch floppy disk. If you require other media (e.g., 3.5 inch disk) contact program source.
3. Place distribution diskette in Drive A: and enter the following:
  - >A:
  - >type readme (file contains updated info. on installation)
4. To install on hard disk 'C' in directory 'P8' (you may use other names), enter one of the following lines:
  - For computers with EGA graphics:
    - >INSTALL C P8 EGA
  - For computers with VGA (PS/2) graphics:
    - >INSTALL C P8 VGA
  - For computers with CGA (standard IBM-PC) color graphics:
    - >INSTALL C P8 CGA
  - For computers with CGA monochrome graphics:
    - >INSTALL C P8 MCGA
  - For computers with other graphics:
    - >INSTALL C P8 XXX
    - (note: program will run, but without plotting routines)
5. Add the following line to the CONFIG.SYS file in the root directory of your hard disk and reboot computer:
  - FILES=20 (note: can be  $>20$  )
6. Change to P8 directory (required each time you run program):
  - >C:
  - >CD\P8
7. Review and/or print documentation update files:
  - >TYPE XXX.DOC (where, XXX = BUGS, CASES, PARTIC, or STORMS)
8. To review help screens, enter the following line:
  - >HELP
9. To run program, enter the following line:
  - >P8

**Table E-2**  
**Running Sample Cases**

1. Type/print list of sample cases provided with program:  
    >Copy CASES.DOC prn
2. Run program:  
    >P8
3. Review introductory help screens. Press any key to continue with next screen, or press <Esc> to move directly to program menu.
4. Try moving around the menu with the cursor keys without pressing <Enter>. To view help screens associated with any procedure on the menu, press <F1>. To get help on operating the menu, press <F7>.
5. The program loads 'DEFAULT.CAS' automatically. Work with this case initially. Enter the following commands from the main menu:  
    'CLS' = Case List Site = list input values for case  
    'RM' = Run Model  
    'LR' = List Removal Efficiencies  
    'LBA' = List Water and Mass Balances
6. Try editing input values and re-running model:  
    'CEA' = Case Edit All  
    Each edit screen is presented. Move around edit screen with cursor. Try making changes to input fields. Try help keys <F1>, <F7>, <F8>. Press <F2> to save results or <Esc> to move onto next screen without making changes. Repeat Step 5 to see how changes affect outputs.
7. Now try loading and running a sample case. Review the CASES.DOC listing (Step 1) and select a case. To load a sample case:  
    'GRA' = Case Read All
8. You will be asked to specify a 'PATH' to search for the input case. The default PATH is '\*.CAS', which specifies that all files with the 'CAS' extension will be searched. Press the <Enter> key to accept the default PATH.
9. A list of all '.CAS' files will be displayed. Use the cursor arrows to locate the desired file. Note that the file list may extend beyond the bottom of the window. When you have located the file, press <Enter>. The file will be loaded. The network of devices and watersheds will be listed. Press any key to return to menu. Repeat Steps 5-6 with the new case.
10. Try entering the ADVANCED USER MODE. From the main menu, press <SHIFT><F1>. A message should appear indicating the new user mode. Press any key to continue. Note expansion of the menu. Review other output formats ('List' or 'Plot' procedures).

**Table E-3**  
**Entering New Cases**

1. Assemble reference materials for site (maps, engineering reports).
2. Construct schematic diagram illustrating downstream linkage of watersheds and devices.
3. Assign a name ( $\leq 8$  characters) and number (1-24) to each watershed. Write these on your schematic.
4. Tabulate basic watershed characteristics needed for model input, as listed in Appendix B.
5. Assign a name ( $\leq 8$  characters), number (1-24), and device type code (1-7) to each device. It is often convenient (but not necessary) to assign device numbers in downstream order. Write these on your schematic.
6. Tabulate basic device characteristics needed for model input, as listed in Appendix B.
7. Run program. Move to program directory on hard disk and enter 'P8'.
8. Review introductory help screens (to skip these, press <ESC>).
9. Clear existing data (Procedure = 'CZ' = 'Case Zero').
10. Enter site data (Procedure = 'CEA' = 'Case Edit All'). Refer to your schematic to identify device/watershed numbers and names.
11. Load desired particle file (Procedure = 'CRP' = 'Case Read Particles'); suggest using 'SIMPLE.PAR' and 'TYPE2.STM' in preliminary runs; this will speed computations.
12. Print a copy of the watershed/device network linkage for future reference; Procedure = 'CLN' = 'Case List Network'; hit 'Print Scrn' key at <H> prompt.
13. Save input case values on disk (Procedure = 'CSI' = 'Case Save Inputs').
14. Run simulation (Procedure = 'RM' = 'Run Model') etc...

Table E-4  
Designing Site BMP's

1. Define treatment objectives, expressed in terms of target particle class, removal efficiency, and time period.  
e.g.: (a) - 85% TSS removal for average year (~1980, 1974, 1976)  
(b) - 60% Fine Particle Removal (P10%) for average year
  2. Enter a rough site plan, accounting for basic hydrologic units (subwatersheds) and likely locations for BMP's (use 'pipes' temporarily, if device types are unknown) (see Table E-3).
  3. In preliminary design runs, use the 1-inch TYPE2.STM file with 5 PASSES and the NURP50.PAR parameter file. SIMPLE.PAR can be used if your target particle class is P10% (this will speed computations, relative to NURP50.PAR).
  4. Verify that watershed/device linkage is correct ('LCN' = 'List Case Network') and execute model 'Run Model'. Correct inputs as needed.
  5. 'Run Design Lookup' to retrieve preliminary designs(s) and place at appropriate locations in site plan. Or enter your own designs, based upon your preferences and site constraints. If your objective is 1.(b) above, retrieve designs for 85% TSS removal as starting points.
  6. 'Run Design Tune' to rescale device(s) based upon target removal efficiency. Or modify BMP design manually to achieve target for TYPE2.STM.
  7. Rerun model using design rainfall period (e.g., 1980) and 1-month startup period (STORM FILE=PROV6987.STM, START DATE=791201, KEEP DATE=800101, STOP DATE=81001, PASSES=1, on screen 'Case Edit First'). Other "average years" are 1974 or 1976.
  8. Adjust design to achieve compliance with treatment objective for yearly rainfall sequence. Do this manually or use the 'Run Design Tune' procedure.\*
  9. 'Run Sensitivity' analysis to evaluate sensitivity of removal efficiency to site input values.\* Refine input value estimates and adjust design, as appropriate.
  10. Check that BMP design also complies with engineering guidelines (e.g., Schueler,1987) and iterate as needed.
- \* May require lengthy computer run (overnight execution may be most convenient).